CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation
Intel VC820 (733 MHz Pentium III)

SPECfp2000 = 244

SPECfp_base2000 = 234

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Mar-2000 | Hardware Avail: Nov-1999 | Software Avail: Feb-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	589	272	569	281
171.swim	3100	853	363	851	364
172.mgrid	1800	892	202	892	202
173.applu	2100	1072	196	1050	200
177.mesa	1400	481	291	481	291
178.galgel	2900	1132	256	1048	277
179.art	2600	869	299	888	293
183.equake	1300	611	213	486	268
187.facerec	1900	1016	187	922	206
188.ammp	2200	886	248	885	248
189.lucas	2000	808	247	809	247
191.fma3d	2100	974	216	908	231
200.sixtrack	1100	906	121	852	129
301.apsi	2600	988	263	941	276

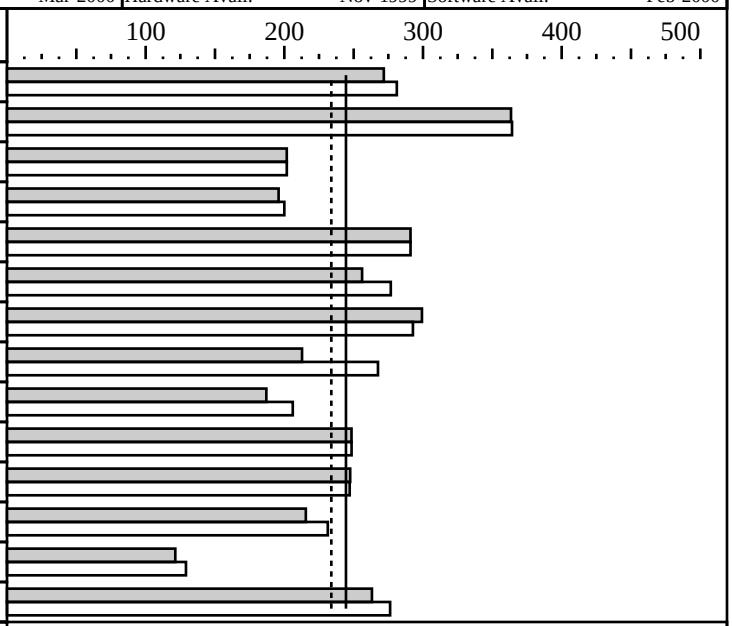

Hardware

CPU:	733 MHz Pentium III processor
CPU MHz:	733
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on-die
Secondary Cache:	256KB(I+D) on-die ECC
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB PC800 RDRAM non-ECC
Disk Subsystem:	IBM DJNA 371800 ATA-66
Other Hardware:	Diamond Multimedia Viper 770 Ultra TNT2 AGP

Software

Operating System:	Windows 2000 (Build 2195)
Compiler:	Intel C and Fortran Compiler 4.5 for Windows 2000 Microsoft Visual C++ 6.0 C libraries, SmartHeap library
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QaxK -Qipo_wp -O3 +FDO
Portability:
178.galgel: -FI -Fe$@ -link -stack:32000000
Peak tuning:
168.wupwise: -Qipo_wp -QxK  +FDO
171.swim: -Qipo_wp -QaxK -O3 +FDO
172.mgrid: -Qipo_wp -QaxK -O3 +FDO
173.applu: -Qipo_wp -QxK  +FDO
177.mesa: -Qipo_wp -QaxK -O3 +FDO shlW32M.lib
178.galgel: -Qipo_wp -QxK -O3 +FDO -Zi shlW32M.lib
179.art: -Qipo_wp -QxK +FDO shlW32M.lib
183.equake: -QxK -Qrcd -Ow -Qipo_wp +FDO shlW32M.lib
187.facerec: -Qipo_wp -QxK -O3 +FDO -Zi shlW32M.lib
188.ammp: -Qipo_wp -QaxK -O3 +FDO shlW32M.lib
189.lucas: -Qipo_wp -QxK -O3 +FDO -Zi shlW32M.lib
191.fma3d: -QxK -O1 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

200.sixtrack: -Qipo_wp -QxK +FDO
Tested systems can be used with Shin-G ATX case,Sparkle Inc., power supply
Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/vc/vc_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 133 MHz