CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation
Intel SE440BX-2 (750 MHz Pentium III)

SPECint2000 = 330

SPECint_base2000 = 325

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Mar-2000 | Hardware Avail: Dec-1999 | Software Avail: Feb-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	392	358	385	364
175.vpr	1400	505	277	501	279
176.gcc	1100	416	264	399	276
181.mcf	1800	760	237	750	240
186.crafty	1000	265	377	265	377
197.parser	1800	624	289	622	289
252.eon	1300	427	304	427	304
253.perlbmk	1800	408	441	408	441
254.gap	1100	362	304	357	308
255.vortex	1900	343	553	336	566
256.bzip2	1500	513	292	496	303
300.twolf	3000	978	307	950	316

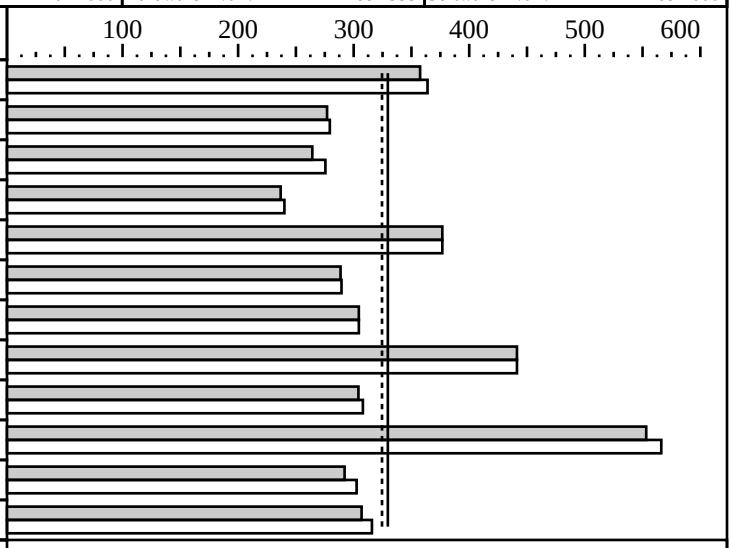

Hardware

CPU:	750 MHz Pentium III processor
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on-die
Secondary Cache:	256KB(I+D) on-die ECC
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB PC100 SDRAM
Disk Subsystem:	IBM DJNA 371800 ATA-66
Other Hardware:	Diamond Multimedia Viper 770 Ultra TNT2 AGP

Software

Operating System:	Windows 2000 (Build 2195)
Compiler:	Intel C Compiler 4.5 for Windows 2000 Microsoft Visual C++ 6.0 C libraries, SmartHeap library
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo_wp shlW32M.lib +FDO
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000 -Op
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip, 175.vpr, 181.mcf, 186.crafty, 197.parser, 252.eon, 253.perlbmk:
-QxK -Qipo_wp FDO shlW32M.lib
176.gcc, 254.gap, 255.vortex, 256.bzip2, 300.twolf:
-QxK -Qipo_wp FDO -Oa shlW32M.lib
Tested systems can be used with Shin-G ATX case,Sparkle Inc., power supply
Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/se2/se2_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 100 MHz
```