CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI 2400 32X 400MHz R12k

SPECint_rate2000 = 125

SPECint_rate_base2000 = 115

SPEC license #: 4 | Tested by: SGI | Test date: May-2000 | Hardware Avail: Jun-2000 | Software Avail: Apr-2000

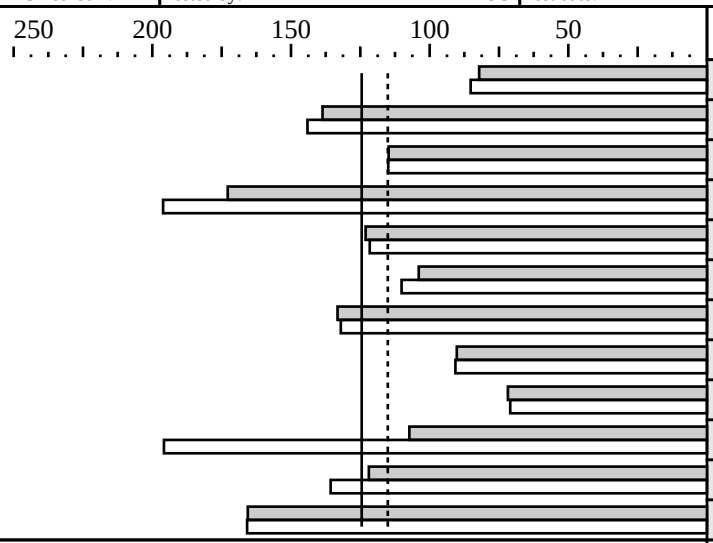

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	32	633	82.1	32	610	85.2
175.vpr	32	375	139	32	361	144
176.gcc	32	356	115	32	355	115
181.mcf	32	387	173	32	341	196
186.crafty	32	302	123	32	305	122
197.parser	32	643	104	32	607	110
252.eon	32	362	133	32	365	132
253.perlbmk	32	741	90.2	32	737	90.7
254.gap	32	569	71.8	32	576	70.9
255.vortex	32	657	107	32	360	196
256.bzip2	32	457	122	32	410	136
300.twolf	32	673	166	32	672	166

Hardware

CPU:	R12000
CPU MHz:	400
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	2-64
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	32GB
Disk Subsystem:	1 x 18 GB SCSI, 10 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.8f
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on -LNO:prefetch_ahead=2
 .        -INLINE:aggressive=on -OPT:Olimit=0:alias=disjoint:alias=restrict -lmalloc (FEEDBACK)
 181.mcf: -Ofast=ip27 -IPA:min_hot=14 -lmalloc (FEEDBACK)
 176.gcc: -Ofast=ip27 (FEEDBACK)
 186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -lmalloc (FEEDBACK)
 197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI 2400 32X 400MHz R12k

SPECint_rate2000 = 125
SPECint_rate_base2000 = 115

SPEC license #: 4 | Tested by: SGI | Test date: May-2000 | Hardware Avail: Jun-2000 | Software Avail: Apr-2000

Notes/Tuning Information (Continued)

252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -lmalloc (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0
. -CG:ld_latency=5 -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: -Ofast=ip27 -IPA:use_intrinsic (FEEDBACK)

The following O/S parameters were set:

```
setenv PAGESIZE_DATA 4096
setenv PAGESIZE_TEXT 4096
setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 50 ; nlpages_4m = 128
limit stacksize 500000
```

The following is done before building each benchmark that requires (FEEDBACK):

```
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak
```