CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
Origin200 360MHz R12k

SPECint2000 = 298

SPECint_base2000 = 277

SPEC license #: 4 | Tested by: SGI | Test date: Jun-2000 | Hardware Avail: Jun-2000 | Software Avail: Apr-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	687	204	664	211
175.vpr	1400	438	319	422	332
176.gcc	1100	397	277	397	277
181.mcf	1800	459	392	445	405
186.crafty	1000	329	304	333	300
197.parser	1800	743	242	686	262
252.eon	1300	399	326	404	322
253.perlbmk	1800	814	221	813	221
254.gap	1100	601	183	592	186
255.vortex	1900	728	261	407	467
256.bzip2	1500	525	286	476	315
300.twolf	3000	745	402	742	405

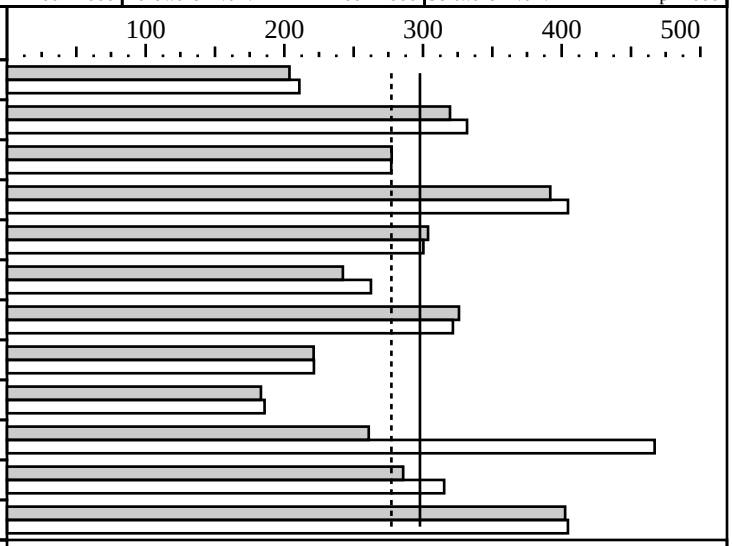

Hardware

CPU:	R12000
CPU MHz:	360
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	4MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	512MB
Disk Subsystem:	1 x 9 GB SCSI
Other Hardware:	None

Software

Operating System:	IRIX 6.5.8f
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90 SCSL 1.2 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on -LNO:prefetch_ahead=2
 .        -INLINE:aggressive=on -OPT:Olimit=0:alias=disjoint:alias=restrict -lmalloc (FEEDBACK)
 181.mcf: -Ofast=ip27 -IPA:min_hot=14 -lmalloc (FEEDBACK)
 176.gcc: -Ofast=ip27 (FEEDBACK)
 186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -lmalloc (FEEDBACK)
 197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
Origin200 360MHz R12k

SPECint2000 = 298
SPECint_base2000 = 277

SPEC license #: 4 | Tested by: SGI | Test date: Jun-2000 | Hardware Avail: Jun-2000 | Software Avail: Apr-2000

Notes/Tuning Information (Continued)

252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -lmalloc (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0
. -CG:ld_latency=5 -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: -Ofast=ip27 -IPA:use_intrinsic (FEEDBACK)

The following O/S parameters were set:

```
setenv PAGESIZE_DATA 4096
setenv PAGESIZE_TEXT 4096
setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 50 ; nlpages_4m = 128
limit stacksize 500000
```

The following is done before building each benchmark that requires (FEEDBACK):

```
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak
```