CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3400 16X 400MHz R12k

SPECint_rate2000 = 65.3

SPECint_rate_base2000 = 60.5

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

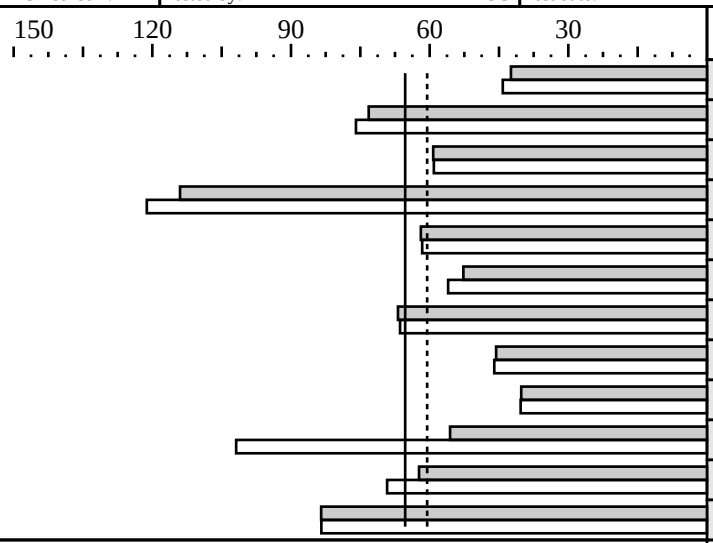

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	613	42.4	16	588	44.2
175.vpr	16	355	73.2	16	342	75.9
176.gcc	16	345	59.2	16	345	59.1
181.mcf	16	293	114	16	276	121
186.crafty	16	300	61.9	16	301	61.6
197.parser	16	634	52.7	16	597	56.0
252.eon	16	361	66.9	16	363	66.4
253.perlbmk	16	732	45.6	16	726	46.0
254.gap	16	508	40.2	16	506	40.3
255.vortex	16	634	55.6	16	346	102
256.bzip2	16	447	62.3	16	402	69.2
300.twolf	16	667	83.5	16	667	83.4

Hardware

CPU:	R12000
CPU MHz:	400
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	4-32
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16GB
Disk Subsystem:	1 x 18 GB FC, 12 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.9m
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90 SCSL 1.2 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurrences of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on -LNO:prefetch_ahead=2
 .        -INLINE:aggressive=on -OPT:Olimit=0:alias=disjoint:alias=restrict -lmalloc (FEEDBACK)
 181.mcf: -Ofast=ip27 -IPA:min_hot=14 -lmalloc (FEEDBACK)
 176.gcc: -Ofast=ip27 (FEEDBACK)
 186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -lmalloc (FEEDBACK)
 197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -lmalloc (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0
. -CG:ld_latency=5 -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: -Ofast=ip27 -IPA:use_intrinsic (FEEDBACK)

The following O/S parameters were set:

```
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
limit stacksize 500000
```

The following is done before building each benchmark that requires (FEEDBACK):

```
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak
```