CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 400MHz R12k

SPECfp2000 = 407

SPECfp_base2000 = 382

SPEC license #: 4 | Tested by: SGI | Test date: Sep-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	507	316	405	395
171.swim	3100	659	470	660	470
172.mgrid	1800	580	310	562	320
173.applu	2100	710	296	666	315
177.mesa	1400	485	289	451	310
178.galgel	2900	291	998	254	1144
179.art	2600	232	1121	237	1098
183.equake	1300	430	303	421	309
187.facerec	1900	403	472	396	479
188.ammp	2200	561	392	562	391
189.lucas	2000	522	383	520	384
191.fma3d	2100	862	244	751	280
200.sixtrack	1100	555	198	550	200
301.apsi	2600	845	308	691	376

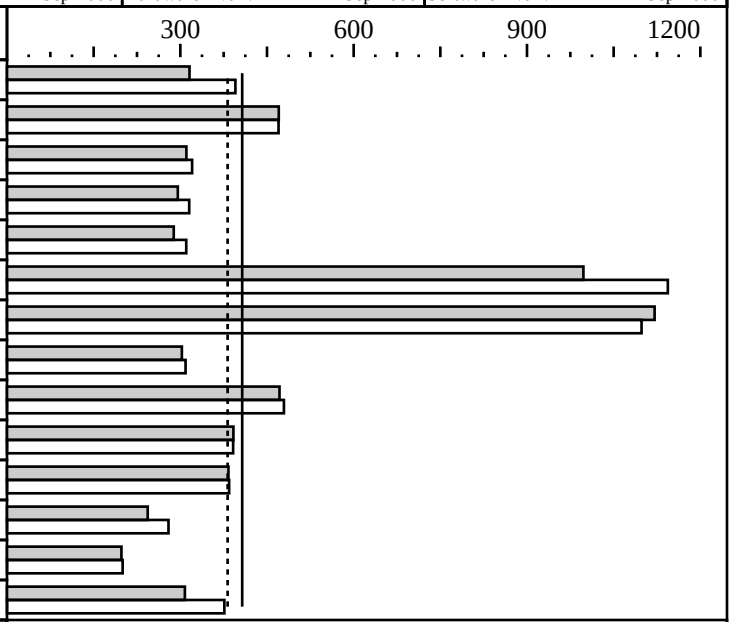

Hardware

CPU:	R12000
CPU MHz:	400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2-8
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1GB
Disk Subsystem:	1 x 18 GB FC, 2 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.9m
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90 SCSL 1.2 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip27 -LNO:fusion=2
Portability Flags:
   178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip27 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000 -INLINE:aggressive=on
.            -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip27 -LNO:cs2=8m
172.mgrid: -Ofast=ip27 -LNO:cs2=8m:blocking=off
173.applu: -Ofast=ip27 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2
177.mesa: -Ofast=ip27 -OPT:goto=off -LNO:opt=0 (FEEDBACK)
178.galgel: -Ofast=ip27 -LNO:ou_max=7 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 400MHz R12k

SPECfp2000 = 407
SPECfp_base2000 = 382

SPEC license #: 4 | Tested by: SGI | Test date: Sep-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
179.art: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -IPA:min_hot=15 (FEEDBACK)
183.equake: -Ofast=ip27 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
187.facerec: -Ofast=ip27 -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE) -LNO:fusion=2 (FEEDBACK)
188.ammp: -Ofast=ip27 -OPT:goto=off -IPA:space=500:plimit=900 (FEEDBACK)
189.lucas: -Ofast=ip27 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
191.fma3d: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -OPT:goto=off:unroll_size=160:unroll_times_max=4
.           -CG:ld_latency=2 (FEEDBACK)
200.sixtrack:= -Ofast=ip27 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
301.apsi: -Ofast=ip27 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
The following O/S parameters were set:
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
```