CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 400MHz R12k

SPECint2000 = 353

SPECint_base2000 = 328

SPEC license #: 4 | Tested by: SGI | Test date: Sep-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	611	229	590	237
175.vpr	1400	354	395	345	406
176.gcc	1100	346	318	346	317
181.mcf	1800	279	646	261	689
186.crafty	1000	300	334	301	332
197.parser	1800	635	284	598	301
252.eon	1300	363	359	366	355
253.perlbmk	1800	731	246	729	247
254.gap	1100	499	220	495	222
255.vortex	1900	638	298	349	545
256.bzip2	1500	446	336	402	373
300.twolf	3000	667	450	667	449

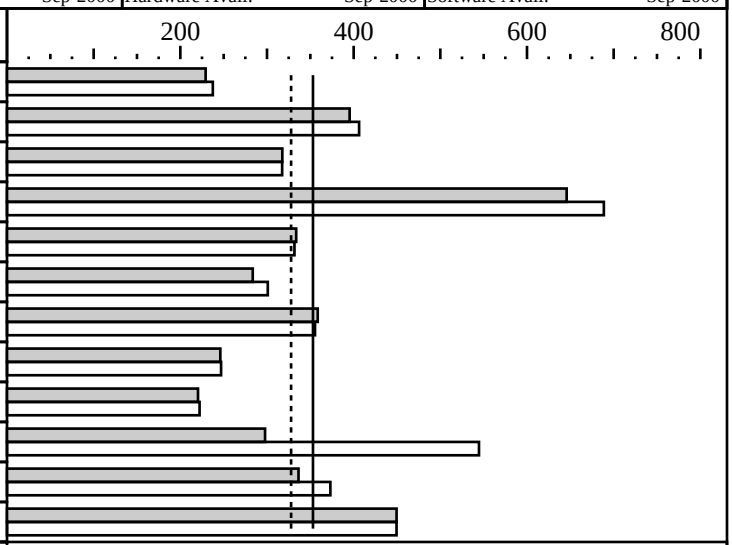

Hardware

CPU:	R12000
CPU MHz:	400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2-8
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1GB
Disk Subsystem:	1 x 18 GB FC, 2 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.9m
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90 SCSL 1.2 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on -LNO:prefetch_ahead=2
 .        -INLINE:aggressive=on -OPT:Olimit=0:alias=disjoint:alias=restrict -lmalloc (FEEDBACK)
 181.mcf: -Ofast=ip27 -IPA:min_hot=14 -lmalloc (FEEDBACK)
 176.gcc: -Ofast=ip27 (FEEDBACK)
 186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -lmalloc (FEEDBACK)
 197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 400MHz R12k

SPECint2000 = 353
SPECint_base2000 = 328

SPEC license #: 4 | Tested by: SGI | Test date: Sep-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

Notes/Tuning Information (Continued)

252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -lmalloc (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0
. -CG:ld_latency=5 -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: -Ofast=ip27 -IPA:use_intrinsic (FEEDBACK)

The following O/S parameters were set:
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
limit stacksize 500000

The following is done before building each benchmark that requires (FEEDBACK):
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak