CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel VC820 (800EB MHz, Pentium III processor)

SPECfp2000 = 286

SPECfp_base2000 = 274

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2000 | Hardware Avail: Mar-2000 | Software Avail: Nov-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	463	346	463	346
171.swim	3100	776	399	776	399
172.mgrid	1800	803	224	741	243
173.applu	2100	904	232	903	233
177.mesa	1400	319	438	323	433
178.galgel	2900	1045	278	962	301
179.art	2600	713	365	688	378
183.equake	1300	593	219	480	271
187.facerec	1900	740	257	663	286
188.ammp	2200	871	253	850	259
189.lucas	2000	703	285	706	283
191.fma3d	2100	837	251	837	251
200.sixtrack	1100	807	136	788	140
301.apsi	2600	863	301	829	314

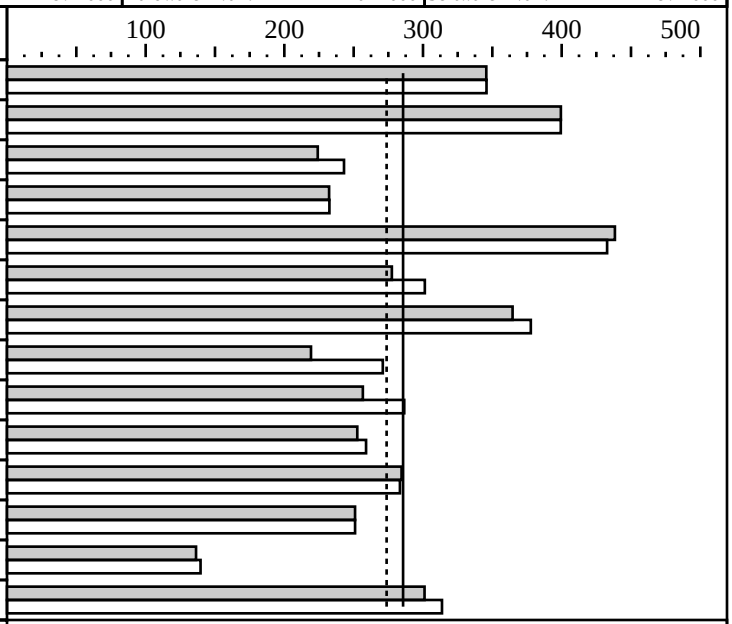

Hardware

CPU:	Pentium III processor (800EB MHz, 133 MHz bus)
CPU MHz:	800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	Creative Labs Annihalator 2

Software

Operating System:	Windows 2000(Build 2195)
Compiler:	Intel C/C++ Compiler 5.0, Intel FORTRAN Compiler 5.0, Microsoft Visual C++ 6.0 (for libraries), Other software: Microquill SmartHeap V5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo -O3 +FDO
Portability:
178.galgel: -FI /F32000000
Peak tuning:
168.wupwise:    -Qipo -QxK  -O3 +FDO
171.swim:       -Qipo -QxK  -O3 +FDO
172.mgrid:      -Qipo -QaxK -O3 +FDO
173.applu:      -Qipo -QxK  -O3 +FDO
177.mesa:       -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
178.galgel:     -Qipo -QxK  -O3 +FDO shlW32M.lib
179.art:        -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
183.equake:     -Qipo -QxK  -Qrcd -Oa +FDO shlW32M.lib
187.facerec:    -Qipo -QxK  -O3 +FDO shlW32M.lib
188.ammp:       -Qipo -QxK  -O3 -Oa +FDO
189.lucas:      -Qipo -QxK  -O3 +FDO shlW32M.lib
191.fma3d:      -Qipo -QxK  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
200.sixtrack:   -Qipo -QxK  +FDO
301.apsi:       -Qipo -QxK  +FDO
Library ordering for 178.galgel, 187.facerec and 189.lucus (include
SmartHeap correctly with default libs): LIBS=libIEPCF90.lib libintrins.lib
libF90.lib libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
shlW32M.lib is the SmartHeap library V5.0 from Microquill: http://www.microquill.com
Tested systems can be used with Shin-G ATX case,Sparkle Inc.,
power supply. Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/vc/vc_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 133 MHz
```