CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel VC820 (933 MHz, Pentium III processor)

SPECfp2000 = 309

SPECfp_base2000 = 295

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2000 | Hardware Avail: Mar-2000 | Software Avail: Nov-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	421	380	421	380
171.swim	3100	770	403	770	403
172.mgrid	1800	753	239	670	269
173.applu	2100	861	244	860	244
177.mesa	1400	277	505	281	499
178.galgel	2900	995	292	922	315
179.art	2600	695	374	668	389
183.equake	1300	565	230	459	283
187.facerec	1900	673	282	600	317
188.ammp	2200	805	273	785	280
189.lucas	2000	658	304	660	303
191.fma3d	2100	770	273	770	273
200.sixtrack	1100	696	158	679	162
301.apsi	2600	788	330	756	344

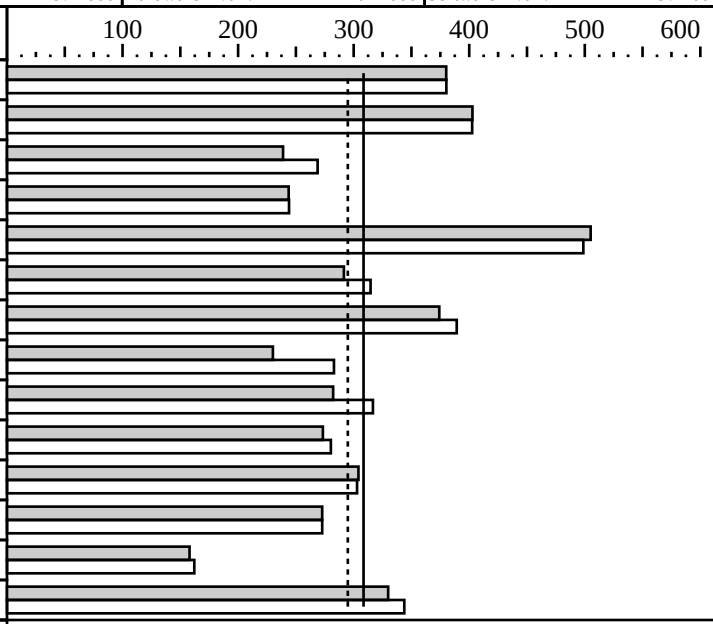

Hardware

CPU:	Pentium III processor (933 MHz, 133 MHz bus)
CPU MHz:	933
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	Creative Labs Annihalator 2

Software

Operating System:	Windows 2000(Build 2195)
Compiler:	Intel C/C++ Compiler 5.0, Intel FORTRAN Compiler 5.0, Microsoft Visual C++ 6.0 (for libraries), Other software: Microquill SmartHeap V5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo -O3 +FDO
Portability:
178.galgel: -FI /F32000000
Peak tuning:
168.wupwise:    -Qipo -QxK  -O3 +FDO
171.swim:       -Qipo -QxK  -O3 +FDO
172.mgrid:      -Qipo -QaxK -O3 +FDO
173.applu:      -Qipo -QxK  -O3 +FDO
177.mesa:       -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
178.galgel:     -Qipo -QxK  -O3 +FDO shlW32M.lib
179.art:        -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
183.equake:     -Qipo -QxK  -Qrcd -Oa +FDO shlW32M.lib
187.facerec:    -Qipo -QxK  -O3 +FDO shlW32M.lib
188.ammp:       -Qipo -QxK  -O3 -Oa +FDO
189.lucas:      -Qipo -QxK  -O3 +FDO shlW32M.lib
191.fma3d:      -Qipo -QxK  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
200.sixtrack:   -Qipo -QxK  +FDO
301.apsi:       -Qipo -QxK  +FDO
Library ordering for 178.galgel, 187.facerec and 189.lucus (include
SmartHeap correctly with default libs): LIBS=libIEPCF90.lib libintrins.lib
libF90.lib libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
shlW32M.lib is the SmartHeap library V5.0 from Microquill: http://www.microquill.com
Tested systems can be used with Shin-G ATX case,Sparkle Inc.,
power supply. Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/vc/vc_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 133 MHz
```