CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 1X 500MHz R14k

SPECfp2000 = 463

SPECfp_base2000 = 436

SPEC license #: 4 | Tested by: SGI | Test date: Apr-2001 | Hardware Avail: Jul-2001 | Software Avail: Mar-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	417	383	356	450
171.swim	3100	629	493	624	496
172.mgrid	1800	530	339	531	339
173.applu	2100	610	344	569	369
177.mesa	1400	399	351	361	387
178.galgel	2900	249	1167	221	1309
179.art	2600	215	1210	216	1206
183.equake	1300	412	316	403	323
187.facerec	1900	344	553	344	553
188.ammp	2200	458	480	456	482
189.lucas	2000	496	403	495	404
191.fma3d	2100	761	276	658	319
200.sixtrack	1100	446	247	439	250
301.apsi	2600	733	355	588	442

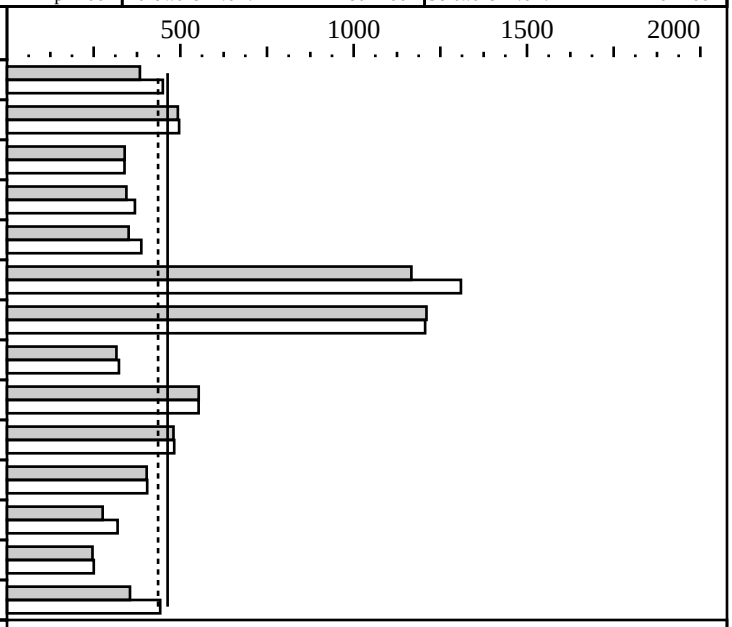

Hardware

CPU:	R14000
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2-8
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1 GB
Disk Subsystem:	1 x 18 GB FC, 24 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.11f
Compiler:	MIPSpro 7.3.1.2m C, Fortran90 SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip27 -LNO:fusion=2
Portability Flags:
   178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip27 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
.             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip27 -LNO:cs2=8m -CG:ld_latency=10
172.mgrid: -Ofast=ip27 -LNO:fusion=2
173.applu: -Ofast=ip27 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip27 -OPT:goto=off -LNO:opt=0:cs2=8m -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip27 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
179.art: -Ofast=ip27 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
183.equake: -Ofast=ip27 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
187.facerec: -Ofast=ip27 -LNO:fusion=2
188.ammp: -Ofast=ip27 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip27 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
191.fma3d: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.          -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
200.sixtrack:= -Ofast=ip27 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
301.apsi: -Ofast=ip27 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000 ;
   limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
```