CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3200 4X 500MHz R14k

SPECfp_rate2000 = 19.0

SPECfp_rate_base2000 = 17.8

SPEC license #: 4 | Tested by: SGI | Test date: Apr-2001 | Hardware Avail: Jul-2001 | Software Avail: Mar-2001

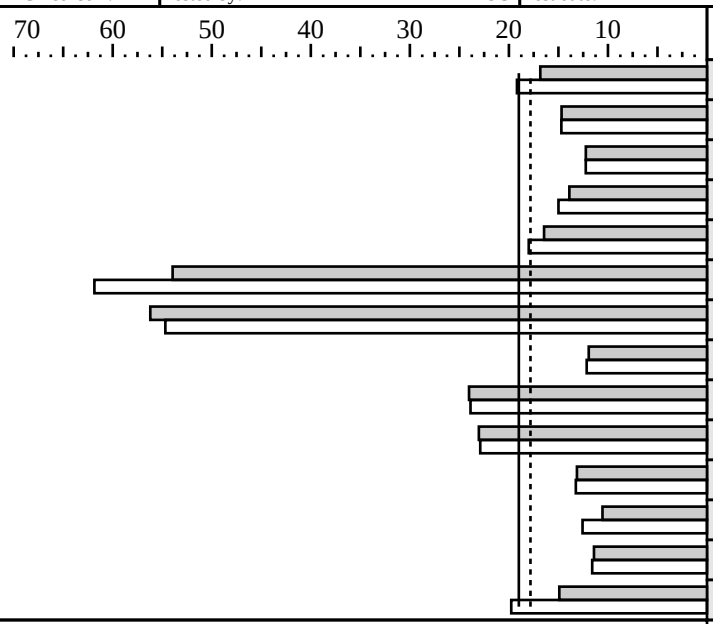

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	441	16.8	4	387	19.2
171.swim	4	980	14.7	4	978	14.7
172.mgrid	4	683	12.2	4	682	12.2
173.applu	4	701	13.9	4	650	15.0
177.mesa	4	395	16.5	4	361	18.0
178.galgel	4	249	54.0	4	218	61.8
179.art	4	215	56.2	4	221	54.7
183.equake	4	505	11.9	4	497	12.1
187.facerec	4	367	24.0	4	369	23.9
188.ammp	4	443	23.0	4	446	22.9
189.lucas	4	707	13.1	4	701	13.2
191.fma3d	4	923	10.6	4	775	12.6
200.sixtrack	4	447	11.4	4	440	11.6
301.apsi	4	809	14.9	4	610	19.8

Hardware

CPU:	R14000
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip
CPU(s) orderable:	2-8
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 GB
Disk Subsystem:	1 x 18 GB FC, 1 x 18 GB FC
Other Hardware:	None

Software

Operating System:	IRIX 6.5.11f
Compiler:	MIPSpro 7.3.1.2m C, Fortran90 SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip27 -LNO:fusion=2
Portability Flags:
   178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip27 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
.             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip27 -LNO:cs2=8m -CG:ld_latency=10
172.mgrid: -Ofast=ip27 -LNO:fusion=2
173.applu: -Ofast=ip27 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip27 -OPT:goto=off -LNO:opt=0:cs2=8m -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip27 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
179.art: -Ofast=ip27 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
183.equake: -Ofast=ip27 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
187.facerec: -Ofast=ip27 -LNO:fusion=2
188.ammp: -Ofast=ip27 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip27 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
191.fma3d: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.          -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
200.sixtrack:= -Ofast=ip27 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
301.apsi: -Ofast=ip27 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000 ;
   limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
```