CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3400 32X 500MHz R14k

SPECint_rate2000 = 155

SPECint_rate_base2000 = 149

SPEC license #: 4 | Tested by: SGI | Test date: May-2001 | Hardware Avail: Jul-2001 | Software Avail: Mar-2001

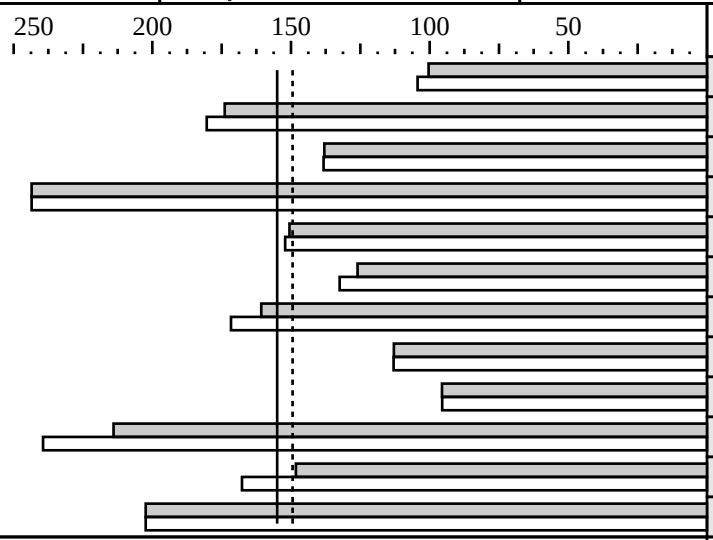

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	32	518	100	32	498	104
175.vpr	32	299	174	32	288	180
176.gcc	32	296	138	32	295	138
181.mcf	32	274	244	32	274	244
186.crafty	32	247	151	32	244	152
197.parser	32	530	126	32	504	132
252.eon	32	300	161	32	281	172
253.perlbmk	32	592	113	32	591	113
254.gap	32	427	95.6	32	428	95.5
255.vortex	32	330	214	32	295	239
256.bzip2	32	376	148	32	332	168
300.twolf	32	550	202	32	550	202

Hardware

CPU:	R14000
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	4-32
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	32 GB
Disk Subsystem:	1 x 18 GB FC, 20 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.11f
Compiler:	MIPSpro 7.3.1.2m C, C++ SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   252.eon: -lm
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
            -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
 .        -LNO:prefetch_ahead=2 -INLINE:aggressive=on
 .       -OPT:Olimit=0:alias=disjoint:alias=restrict -CG:ld_latency=10 -lmalloc (FEEDBACK)
 181.mcf: basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

176.gcc: -Ofast=ip27 -CG:ld_latency=4 (FEEDBACK)
186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -CG:ld_latency=4 -lmalloc (FEEDBACK)
197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -CG:ld_latency=4 -lmalloc -lm
. (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -CG:ld_latency=8 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic
. -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0 -CG:ld_latency=5
. -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: basepeak=yes

The following O/S parameters were set:

```
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
systune -i ; r12k_bdiag = 0x4000000 ;
limit stacksize 500000
```

The following is done before building each benchmark that requires (FEEDBACK):

```
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak
```