CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3800 64X 500MHz R14k

SPECint_rate2000 = 307

SPECint_rate_base2000 = 296

SPEC license #: 4 | Tested by: SGI | Test date: May-2001 | Hardware Avail: Jul-2001 | Software Avail: May-2001

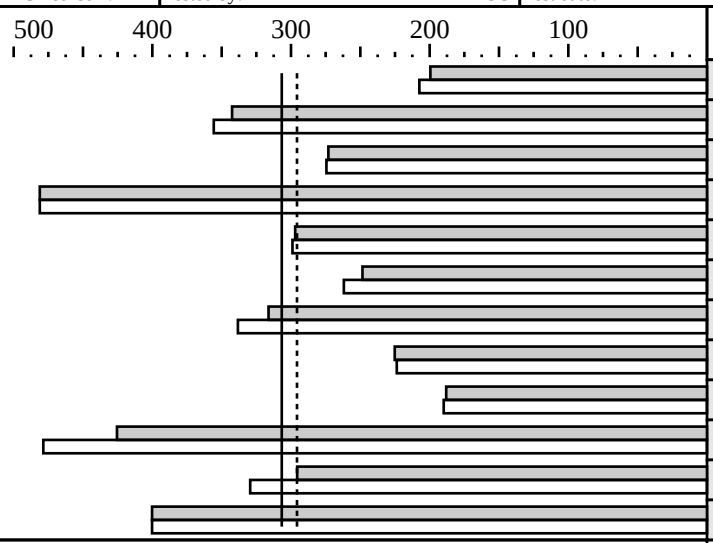

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	64	521	199	64	501	207
175.vpr	64	303	342	64	292	356
176.gcc	64	299	273	64	298	274
181.mcf	64	278	481	64	278	481
186.crafty	64	250	297	64	248	299
197.parser	64	538	248	64	510	262
252.eon	64	305	316	64	285	338
253.perlbmk	64	593	225	64	597	224
254.gap	64	434	188	64	430	190
255.vortex	64	332	425	64	295	479
256.bzip2	64	377	296	64	338	329
300.twolf	64	557	400	64	557	400

Hardware

CPU:	R14000
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	64 cores, 64 chips, 1 core/chip
CPU(s) orderable:	4-512
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	64 GB
Disk Subsystem:	1 x 18 GB FC, 1 x 18 GB, 7 X 36GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.12m
Compiler:	MIPSpro 7.3.1.2m C, C++, Fortran90 SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   252.eon: -lm
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
            -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
 .        -LNO:prefetch_ahead=2 -INLINE:aggressive=on
 .       -OPT:Olimit=0:alias=disjoint:alias=restrict -CG:ld_latency=10 -lmalloc (FEEDBACK)
 181.mcf: basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

176.gcc: -Ofast=ip27 -CG:ld_latency=4 (FEEDBACK)
186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -CG:ld_latency=4 -lmalloc (FEEDBACK)
197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -CG:ld_latency=4 -lmalloc -lm
. (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -CG:ld_latency=8 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic
. -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0 -CG:ld_latency=5
. -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: basepeak=yes

The following O/S parameters were set:
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
systune -i ; r12k_bdiag = 0x4000000 ;
limit stacksize 500000

The following is done before building each benchmark that requires (FEEDBACK):
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak

The first disk mentioned in the Disk Subsystem is the system disk. A striped XFS filesystem was created using the rest of the disks and the benchmark was run on this.