CINT2000 Result

Sun Microsystems
Sun Blade 1000 Model 2900

SPECint_rate2000 = 10.7

SPECint_rate_base2000 = 10.0

SPEC license #: 6	Tested by: Sun Microsystems, Palo Alto	Test date: Apr-2001	Hardware Avail: Aug-2001	Software Avail: Mar-2001

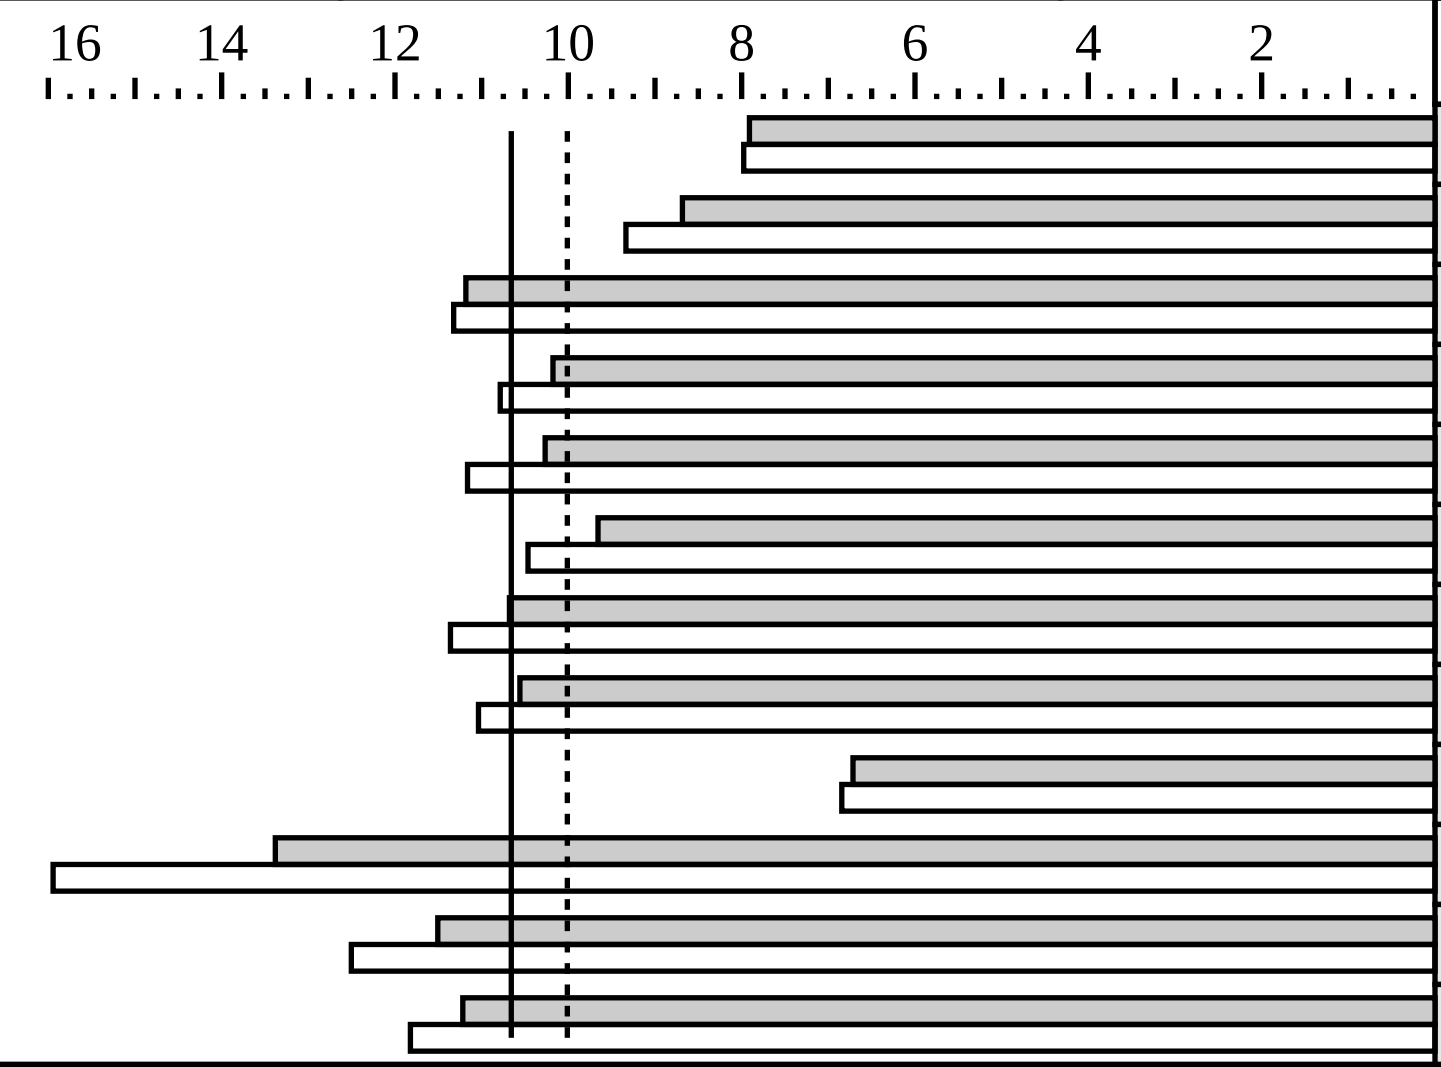

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	411	7.91	2	407	7.98
175.vpr	2	374	8.68	2	348	9.34
176.gcc	2	228	11.2	2	225	11.3
181.mcf	2	410	10.2	2	387	10.8
186.crafty	2	226	10.3	2	208	11.2
197.parser	2	432	9.66	2	399	10.5
252.eon	2	282	10.7	2	265	11.4
253.perlbmk	2	395	10.6	2	378	11.0
254.gap	2	380	6.72	4	746	6.84
255.vortex	2	329	13.4	2	276	15.9
256.bzip2	2	302	11.5	2	278	12.5
300.twolf	2	620	11.2	2	589	11.8

Hardware

CPU:	UltraSPARC-III
CPU MHz:	900
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	None
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	1GB
Disk Subsystem:	1 x 18GB
Other Hardware:	--

Software

Operating System:	Solaris 8 10/00
Compiler:	Forte Developer 6 update 1 w/ latest patches
File System:	UFS
System State:	Single User

Notes/Tuning Information

```
Portability:
    176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
    186.crafty:  -DSUN
    252.eon:     -library=iostream
    253.perlbmk: -DSPEC_CPU2000_SOLARIS
    254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
                 -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Base C   flags: -fast -xcrossfile -xprofile
Base C++ flags: -fast -xcrossfile -xprofile

Peak:
164.gzip: -fast -xalias_level=std -xcrossfile -W2,-whole -xprofile
175.vpr: -fast -xalias_level=std -xcrossfile -xdepend -xregs=syst -W2,-whole -xprofile
         -lmopt
176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xprofile
181.mcf: -fast -xcrossfile -xdepend -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xsafe=mem
         -xprofile
186.crafty: -fast -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4
            -xalias_level=strong -xregs=syst -xchip=ultra2 -xprofile
```

CINT2000 Result

Sun Microsystems
Sun Blade 1000 Model 2900

SPECint_rate2000 = 10.7
SPECint_rate_base2000 = 10.0

SPEC license #:	6	Tested by:	Sun Microsystems, Palo Alto	Test date:	Apr-2001	Hardware Avail:	Aug-2001	Software Avail:	Mar-2001

Notes/Tuning Information (Continued)

```
197.parser: -fast -xcrossfile -xdepend -xregs=syst -Wc,-Qgsched-trace_late=1,-Qgsched-T4
            -xalias_level=strong -xprofile
252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-restrict_g,-restrict
         -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xprofile

253.perlbmk: -fast -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1
             -xcrossfile -xalias_level=std -xsafe=mem -xprofile
254.gap: -fast -xarch=v8 -W2,-crit,-whole -xcrossfile -Wc,-Qiselect-funcalign=32
         -xalias_level=std -xprofile
255.vortex: -fast -xsafe=mem -xcrossfile -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
            -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32 -Wc,-Qpeep-Sh0
            -xrestrict -xdepend -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xprofile
256.bzip2: -fast -xarch=v8 -W2,-Abopt -xcrossfile -xalias_level=strong -Wc,-Qiselect-funcalign=32
           -xdepend -xregs=syst -xprofile
300.twolf: -fast -xalias_level=strong -W2,-whole -xsafe=mem -xprofile

Note: ONESTEP=yes for all benchmarks.

Forte Developer 6 update 1 patches include:
   109503-02,109504-01,109505-08,109506-02,109508-04,109510-01,109513-06

Patch 111228-01 and obp 4.0.40 (or later) is required.

System configuration details located (as of June 2001) at
        http://www.sun.com/desktop/sunblade1000
```