CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER400 (600MHz)

SPECfp2000 = 428

SPECfp_base2000 = 314

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Aug-2001 | Hardware Avail: Aug-2001 | Software Avail: Sep-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	509	314	349	458
171.swim	3100	926	335	833	372
172.mgrid	1800	722	249	566	318
173.applu	2100	1060	198	542	387
177.mesa	1400	440	318	416	336
178.galgel	2900	291	998	248	1170
179.art	2600	619	420	116	2237
183.equake	1300	790	165	422	308
187.facerec	1900	434	438	357	532
188.ammp	2200	603	365	575	383
189.lucas	2000	740	270	726	275
191.fma3d	2100	988	213	953	220
200.sixtrack	1100	443	248	391	281
301.apsi	2600	758	343	746	349

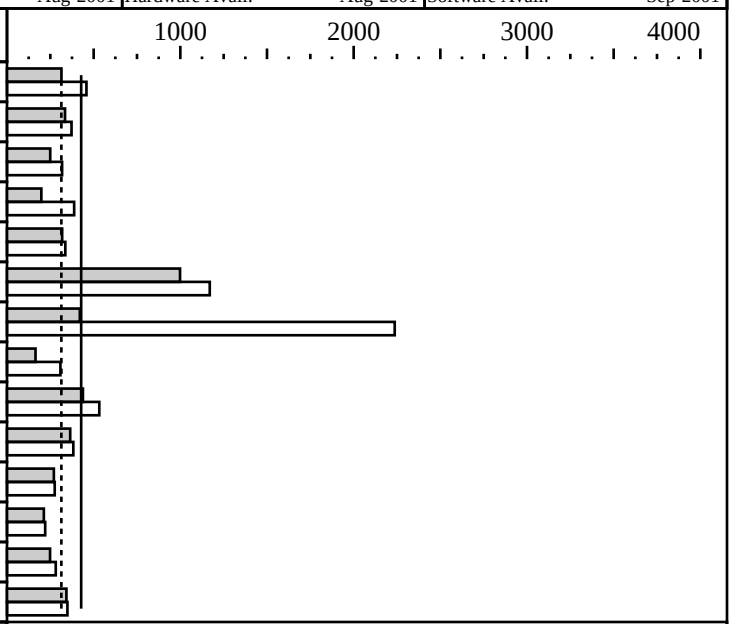

Hardware

CPU:	SPARC64 GP
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 4
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	4096MB
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	Ethernet

Software

Operating System:	Solaris 8 4/01
Compiler:	Fujitsu Parallelnavi 1.0.2 Sun Forte Developer 6 update 2
File System:	ufs
System State:	single user

Notes/Tuning Information

```
FDO: (Parallelnavi 1.0.2)
    fdo_pre0=rm -rf ‘pwd‘/*.*.d
    PASS1=-Kpg    PASS2=-Kpu
FDO: (Forte Developer 6 update 2)
    fdo_pre0=rm -rf ‘pwd‘/../feedback.profile
    PASS1=-xprofile=collect:‘pwd‘/../feedback
    PASS2=-xprofile=use:‘pwd‘/../feedback
Baseline :
(using Fortran compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage FDO

Peak:
(using Fortran compiler of Parallelnavi 1.0.2)
 168.wupwise: -Kfast_GP=2,prefetch=4,nounroll -x dir=‘pwd‘/../../src -fs
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    FDO ONESTEP=yes
171.swim: -Kfast_GP=2,GREG,preex,ilfunc,prefetch=3,largepage,commonpad=152,prefetch_iteration=3,unroll=2,nogs,frecipro
    -O4 -fs
 172.mgrid: -Kfast_GP=2,preex,GREG,commonpad=144,unroll=3,largepage,prefetch=3
    -O4 -fs
 178.galgel: -Kfast_GP=2,GREG,largepage,preex,unroll=2,prefetch_iteration=2,commonpad=24
    -O4 -lssl2mtfma -fs FDO
    RM_SOURCES=lapak.f90
 189.lucas: -Kfast_GP=2,GREG,preex,largepage,nounroll -O4 -fs FDO
 200.sixtrack: -Kfast_GP=2,GREG,noprefetch,unroll=4,largepage,frecipro -fs
 301.apsi: -Kfast_GP=2,GREG,preex,largepage,unroll=2 -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
 188.ammp: -Kfast_GP=2,GREG,popt,prefetch=4,preex,preload,largepage,fuse,unroll=3 -x-

(using FORTRAN77 compiler of Forte Developer 6 update 2)
 173.applu: -fast -Qoption iropt -whole,-Adata_access,-Mt6000,-Mm12000,-Mr40000,-Ma400 -xarch=v8plus -dn
    ONESTEP=yes

(using FORTRAN90 compiler of Forte Developer 6 update 2)
 187.facerec: -fast -xarch=v9 FDO ONESTEP=yes
 191.fma3d: -fast -xarch=v9 FDO ONESTEP=yes

(using C compiler of Forte Developer 6 update 2)
 177.mesa: -fast -xcrossfile -xrestrict -xalias_level=std -xregs=syst -Wc,-Qgsched-trace_late=1,-Qgsched-trace_spec_load=1
    -xarch=v8plus -W2,-Amemopt -dn
    FDO ONESTEP=yes
 179.art: -fast -xalias_level=strong -xdepend -xregs=syst -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm -dn FDO ONESTEP=yes
 183.equake: -fast -xalias_level=strong -xdepend -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm FDO ONESTEP=yes

Portability:
 (for Parallelnavi 1.0.2)
   178.galgel: -Am -Fixed
   187.facerec: -Am
   191.fma3d: -Am

Note:
 System Tunables: (for /etc/system)
  consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
  shmsys:shminfo_shmmax=8589934592, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
 (for /etc/opt/FJSVpnrm/lpg.conf)
  TSS=512M, SHMSEGSIZE=256M
 Feedback directed optimization was used for all baseline benchmarks and peak benchmarks
 except following peak benchmarks: 171.swim, 172.mgrid, 173.applu, 188.ammp, 200.sixtrack.
 System board used with only one CPU present.
```