CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers PRIMEPOWER400 (600MHz)

SPECint2000 = 424

SPECint_base2000 = 390

SPEC license #: 22 | Tested by: Fujitsu Limited | Test date: Aug-2001 | Hardware Avail: Oct-2001 | Software Avail: Sep-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	386	363	378	370
175.vpr	1400	394	355	368	381
176.gcc	1100	386	285	281	392
181.mcf	1800	397	453	384	469
186.crafty	1000	245	409	216	463
197.parser	1800	450	400	438	411
252.eon	1300	305	426	286	455
253.perlbmk	1800	410	439	389	463
254.gap	1100	521	211	436	252
255.vortex	1900	316	601	304	626
256.bzip2	1500	368	408	368	408
300.twolf	3000	640	469	597	502

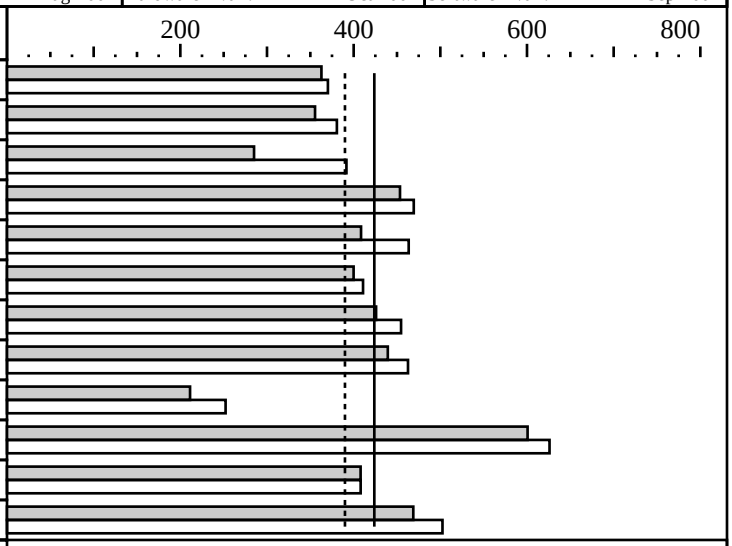

Hardware

CPU:	SPARC64 GP
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 4
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	Ethernet

Software

Operating System:	Solaris 8 4/01
Compiler:	Fujitsu Parallelnavi 1.0.2 Sun Forte Developer 6 update 2
File System:	ufs
System State:	single user

Notes/Tuning Information

```
Baseline (except 252.eon, for Parallelnavi 1.0.2): -Kfast_GP=3,largepage
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
(252.eon, for Forte Developer 6 update 2): -fast -xcrossfile -xarch=v8plus
fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
PASS1=-xprofile=collect:‘pwd‘/../feedback
PASS2=-xprofile=use:‘pwd‘/../feedback

Peak (for Parallelnavi 1.0.2):
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
164.gzip: -Kfast_GP=4
175.vpr: -Kfast_GP=4,staticclump,memalias,switchopt,cond,GREG,nounroll,largepage,onefile,NOFLTLD=3,xi=30
181.mcf: -Kfast_GP=2,nounroll,memalias,restp,prefetch=2,largepage -x-
197.parser: -Kfast_GP=4,switchopt,cond,staticclump,use_rodata,largepage
253.perlbmk: -Kfast_GP=4,memalias,switchopt,largepage,bcopy
254.gap: -Kfast_GP=3,largepage,memalias,unroll=4
256.bzip2: -Kfast_GP=3,largepage
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
300.twolf: -Kfast_GP=5,GREG,memalias,cfunc,staticclump,use_rodata,xi=10,largepage,nounroll,bcopy
(for Forte Developer 6 update 2)
 fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
 PASS1=-xprofile=collect:‘pwd‘/../feedback
 PASS2=-xprofile=use:‘pwd‘/../feedback
176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qiselect-funcalign=64
          -xarch=v8plus -xprefetch -DUSG
186.crafty: -fast -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong
          -xregs=syst -xchip=ultra2 -xarch=v8plus -W2,-Amemopt
252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-restrict_g,-restrict
          -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xarch=v8plus
255.vortex: -fast -xsafe=mem -xcrossfile -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
          -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32 -Wc,-Qpeep-Sh0
         -xrestrict -xdepend -Wc,-Qgsched-trace_late=1,-Qgsched-T4  -xarch=v8plus -W2,-Amemopt

Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_CALLOC_PROTO

Note:
 System Tunables: (for /etc/system)
  consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
  shmsys:shminfo_shmmax=8589934592, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
 (for /etc/opt/FJSVpnrm/lpg.conf)
  TSS=512M, SHMSEGSIZE=256M
 ONESTEP=yes was set for all baseline and peak benchmarks.
 Feedback directed optimization was used for all baseline and peak benchmarks.
 System board used with only one CPU present.

Submitted_by: Maki Nagahama <nagahama@cs.fujitsu.co.jp>
Submitted: Tue Aug 14 00:53:22 2001
Submission: cpu2000-20010814-00800.sub
```