CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D815EEA2 motherboard (1.0 GHz, Pentium III processor)

SPECfp2000 = 264

SPECfp_base2000 = 254

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Aug-2001 | Hardware Avail: Aug-2001 | Software Avail: Oct-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	450	356	450	356
171.swim	3100	1182	262	1184	262
172.mgrid	1800	965	187	977	184
173.applu	2100	1041	202	1042	202
177.mesa	1400	277	505	281	499
178.galgel	2900	1245	233	1154	251
179.art	2600	1076	242	1005	259
183.equake	1300	656	198	545	238
187.facerec	1900	700	271	622	306
188.ammp	2200	835	264	817	269
189.lucas	2000	736	272	735	272
191.fma3d	2100	845	249	844	249
200.sixtrack	1100	661	166	645	170
301.apsi	2600	871	299	841	309

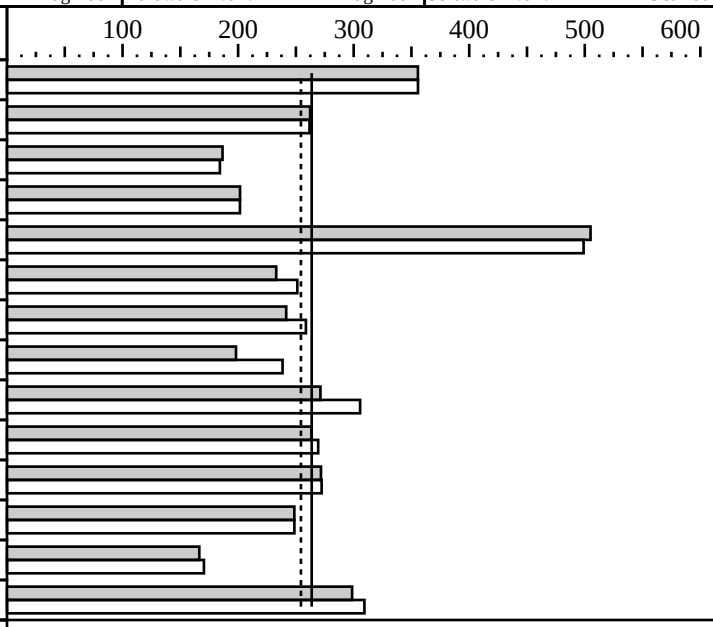

Hardware

CPU:	Pentium III processor (1.0 GHz, 100 MHz bus)
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	128 MB PC133 CL2 SDRAM (2 * 128 MB sticks)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	None

Software

Operating System:	Windows 2000 (Build 2195, SP1)
Compiler:	Intel C++ Compiler 5.0 for Windows Build 001120 Intel Fortran Compiler 5.0 for Windows Build 001027 Microsoft Visual C++ 6.0(for libraries) MicroQuill SmartHeap V5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo -O3 +FDO
Portability:
178.galgel: -FI /F32000000
Peak tuning:
168.wupwise:    -Qipo -QxK  -O3 +FDO
171.swim:       -Qipo -QxK  -O3 +FDO
172.mgrid:      -Qipo -QaxK -O3 +FDO
173.applu:      -Qipo -QxK  -O3 +FDO
177.mesa:       -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
178.galgel:     -Qipo -QxK  -O3 +FDO shlW32M.lib
178.galgel:     LIBS=libIEPCF90.lib libintrins.lib libF90.lib
                libqwin.lib libm.lib shlW32M.lib LIBC.lib
                libirc.lib OLDNAMES.lib
179.art:        -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
183.equake:     -Qipo -QxK  -Qrcd -Oa +FDO shlW32M.lib
187.facerec:    -Qipo -QxK  -O3 +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:    LIBS=libIEPCF90.lib libintrins.lib libF90.lib
                libqwin.lib libm.lib shlW32M.lib LIBC.lib
                libirc.lib OLDNAMES.lib
188.ammp:       -Qipo -QxK  -O3 -Oa +FDO
189.lucas:      -Qipo -QxK  -O3 +FDO shlW32M.lib
189.lucas:      LIBS=libIEPCF90.lib libintrins.lib libF90.lib
                libqwin.lib libm.lib shlW32M.lib LIBC.lib
                libirc.lib OLDNAMES.lib
191.fma3d:      -Qipo -QxK  -O3 +FDO
200.sixtrack:   -Qipo -QxK  +FDO
301.apsi:       -Qipo -QxK  +FDO
Tested systems can be used with Shin-G ATX case, Nspire MAV-250P power supply.
Product information as of 08/2001:
http://developer.intel.com/design/motherbd/ea2/index.htm
Motherboard is available through Intel OEM Distribution Channel.
See http://channel.intel.com/ for more information
The system bus runs at 100 MHz
```