CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI 2400 32X 500MHz R14k

SPECfp_rate2000 = 116

SPECfp_rate_base2000 = 107

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2001 | Hardware Avail: Jul-2001 | Software Avail: Aug-2001

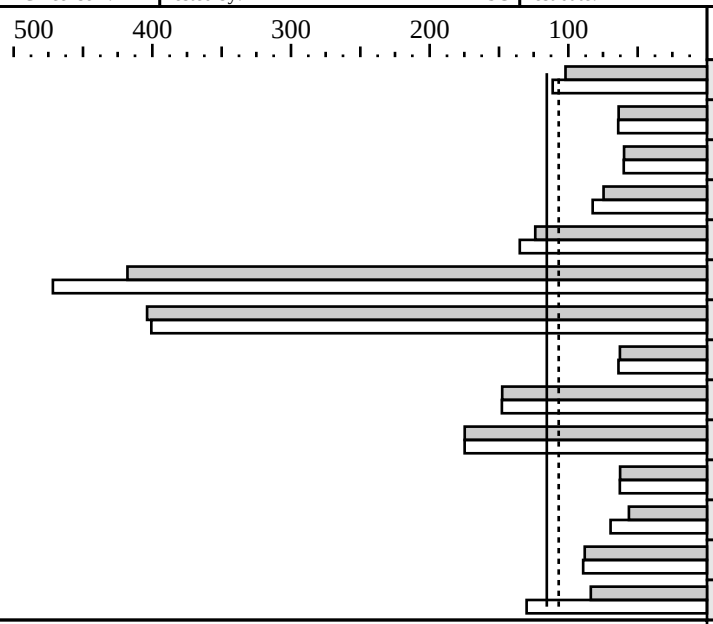

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	582	102	32	534	111
171.swim	32	1806	63.7	32	1797	64.0
172.mgrid	32	1117	59.8	32	1113	60.0
173.applu	32	1045	74.6	32	945	82.4
177.mesa	32	420	124	32	385	135
178.galgel	32	258	418	32	228	472
179.art	32	239	404	32	241	401
183.equake	32	768	62.8	32	756	63.8
187.facerec	32	478	148	32	477	148
188.ammp	32	467	175	32	467	175
189.lucas	32	1185	62.7	32	1181	62.9
191.fma3d	32	1384	56.3	32	1121	69.5
200.sixtrack	32	463	88.2	32	457	89.3
301.apsi	32	1152	83.8	32	742	130

Hardware

CPU:	R14000
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	2-64
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	32 GB
Disk Subsystem:	1 x 18 GB FC, 3 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.13m
Compiler:	MIPSpro 7.3.1.2m C, Fortran90 SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip27 -LNO:fusion=2
Portability Flags:
   178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip27 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
.             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip27 -LNO:cs2=8m -CG:ld_latency=10
172.mgrid: -Ofast=ip27 -LNO:fusion=2
173.applu: -Ofast=ip27 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip27 -OPT:goto=off -LNO:opt=0:cs2=8m -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip27 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
179.art: -Ofast=ip27 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
183.equake: -Ofast=ip27 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
187.facerec: -Ofast=ip27 -LNO:fusion=2
188.ammp: -Ofast=ip27 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip27 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
191.fma3d: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.          -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
200.sixtrack:= -Ofast=ip27 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
301.apsi: -Ofast=ip27 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000 ;
   limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
The first disk mentioned in the Disk Subsystem is the system disk. A striped
XFS filesystem was created using the rest of the disks and the benchmark was
run on this.
```