CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp7400

SPECfp_rate2000 = 11.0

SPECfp_rate_base2000 = 9.86

SPEC license #: 3 | Tested by: HP | Test date: Aug-2001 | Hardware Avail: Sep-2001 | Software Avail: Sep-2001

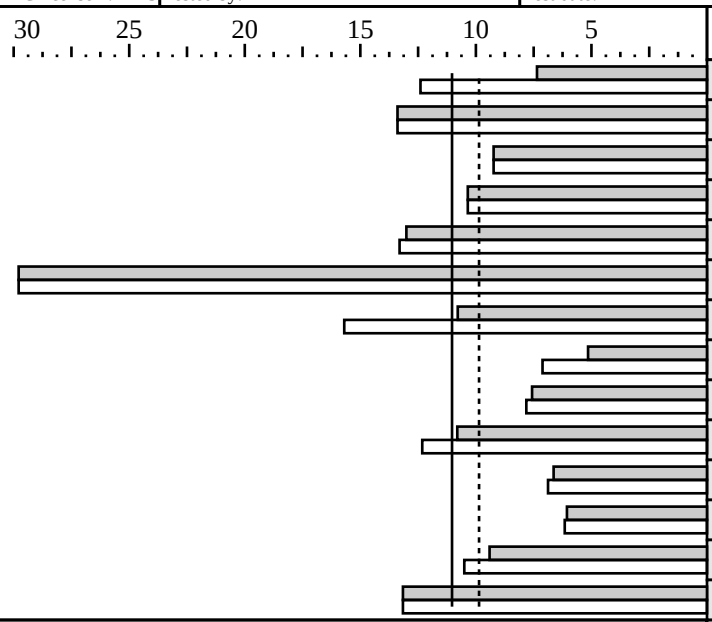

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	505	7.36	2	299	12.4
171.swim	2	537	13.4	2	537	13.4
172.mgrid	2	452	9.23	2	452	9.23
173.applu	2	471	10.4	2	471	10.4
177.mesa	2	250	13.0	2	244	13.3
178.galgel	2	226	29.8	2	226	29.8
179.art	2	559	10.8	2	384	15.7
183.equake	2	586	5.15	2	424	7.12
187.facerec	2	582	7.57	2	564	7.82
188.ammp	2	472	10.8	2	414	12.3
189.lucas	2	699	6.64	2	675	6.88
191.fma3d	2	804	6.06	2	792	6.16
200.sixtrack	2	271	9.41	2	243	10.5
301.apsi	2	458	13.2	2	458	13.2

Hardware

CPU:	PA-8700
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1-8
Parallel:	No
Primary Cache:	0.75MBI + 1.5MBD on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	2x9GB SCSI disk
Other Hardware:	None

Software

Operating System:	B.11.11.0109.6 HP-UX 11i, September 2001 HWE patches
Compiler:	HP ANSI C 11.11.03 aC++ C.03.30.02 Fortran90 11.11.40 PHSS_24207 libm patch
File System:	HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  178.galgel:  +source=fixed

Base Flags:
  f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
  C:   +I/+P +O4 +Odataprefetch -Wl,-a,archive

Peak Flags:

  168.wupwise: +cat +O3 +Odataprefetch +Onofltacc
               -Wl,+FPD -Wl,-a,archive
  171.swim:    basepeak=true
  172.mgrid:   basepeak=true
  173.applu:   basepeak=true
  177.mesa:    +I/+P +Oall +Odataprefetch +Opromote_indirect_calls
               -Wl,+FPD -Wl,-a,archive
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:  basepeak=true
    179.art:     +I/+P +Oall +Onodataprefetch +Onofltacc
                 +Optrs_strongly_typed +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    183.equake:  +O4 +Olibcalls +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    187.facerec: +cat +O3 +Ofastaccess
                 -Wl,+FPD -Wl,-a,archive
    188.ammp:    +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    189.lucas:   +O3 +Onoinline
                 -Wl,+FPD -Wl,-a,archive
    191.fma3d:   +O3 +Onolimit
                 -Wl,+FPD -Wl,-a,archive
    200.sixtrack: +cat +O3 +Onolibcalls +Onolimit +Onoinline
                  +Onodataprefetch
                 -Wl,+FPD -Wl,-a,archive
    301.apsi:    basepeak=true
    ONESTEP=true for 168.wupwise, 187.facerec, 200.sixtrack

  System tunables:

     vps_pagesize 4096, vps_ceiling 16384
     dbc_min_pct 20, dbc_max_pct 20
     maxdsiz 2063835136, maxssiz 401604608
     Unused processors disabled at boot
```