CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer pSeries 610 Mod 6C1 450MHz

SPECfp_rate2000 = 8.99

SPECfp_rate_base2000 = 8.91

SPEC license #: 11 | Tested by: IBM Corp. | Test date: Sep-2001 | Hardware Avail: Oct-2001 | Software Avail: Dec-2001

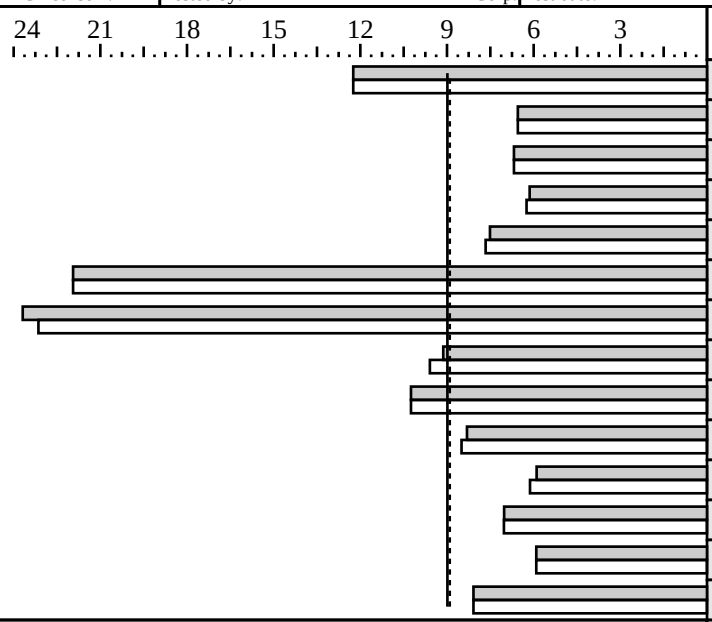

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	303	12.2	2	303	12.2
171.swim	2	1098	6.55	2	1098	6.55
172.mgrid	2	625	6.68	2	625	6.68
173.applu	2	794	6.14	2	780	6.25
177.mesa	2	432	7.51	2	424	7.66
178.galgel	2	307	21.9	2	307	21.9
179.art	2	255	23.7	2	261	23.1
183.equake	2	330	9.13	2	314	9.59
187.facerec	2	430	10.2	2	430	10.2
188.ammp	2	614	8.31	2	601	8.50
189.lucas	2	787	5.90	2	757	6.13
191.fma3d	2	694	7.02	2	693	7.03
200.sixtrack	2	432	5.91	2	432	5.91
301.apsi	2	746	8.08	2	746	8.08

Hardware

CPU:	POWER3-II
CPU MHz:	450
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KBI+64KBD (on chip)
Secondary Cache:	8MB unified (off chip)
L3 Cache:	None
Other Cache:	None
Memory:	2GB
Disk Subsystem:	2x18GB 10000RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.1
Compiler:	Fortran 77 and 90: IBM xl Fortran 7.1.1.0 invoked as 'xlf90' for Fortran 90 and as xlf for Fortran 77 C: IBM VAC++ 5.0.2.0 invoked as 'xlc'
File System:	AIX/JFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags
  -qfixed used in: wupwise, swim, mgrid, applu, galgel, sixtrack, apsi
  -qsuffix=f=f90 used in: galgel, facerec, lucas, fma3d
Base Optimization Flags:
  Fortran:   -O5 -lmass
  C:         -O5 -lmass
Peak Optimization Flags
  168.wupwise:  (basepeak=1)
  171.swim:     (basepeak=1)
  172.mgrid:    (basepeak=1)
  173.applu:    -O5 -lmass -qipa=partition=large
  177.mesa:     -O5 -lmass -qipa=partition=large, fdpr -v -R3
  178.galgel:   (basepeak=1)
  179.art:      -O5 -lmass -qalign=natural
  183.equake:   -O5 -lmass -lhmu -qinline
  187.facerec:  (basepeak=1)
  188.ammp:     -O3 -qarch=pwr3
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  189.lucas:    -qpdf1/pdf2 -O3 -lhmu -lmass
                -qipa=partition=large, fdpr -v -R3
  191.fma3d:    -O4 -lmass -qipa=partition=large
  200.sixtrack: (basepeak=1)
  301.apsi:     (basepeak=1)
fpdr: Feedback directed program restructuring tool
/usr/spec2000 filesystem mounted with no JFS log file I/O
APAR IY 21957 was applied to AIX 5L V5.1 to enable new hardware support
```