CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers PRIMEPOWER850 (675MHz)

SPECint_rate2000 = 88.0

SPECint_rate_base2000 = 82.5

SPEC license #: 22 | Tested by: Fujitsu Limited | Test date: Oct-2001 | Hardware Avail: Feb-2002 | Software Avail: Dec-2001

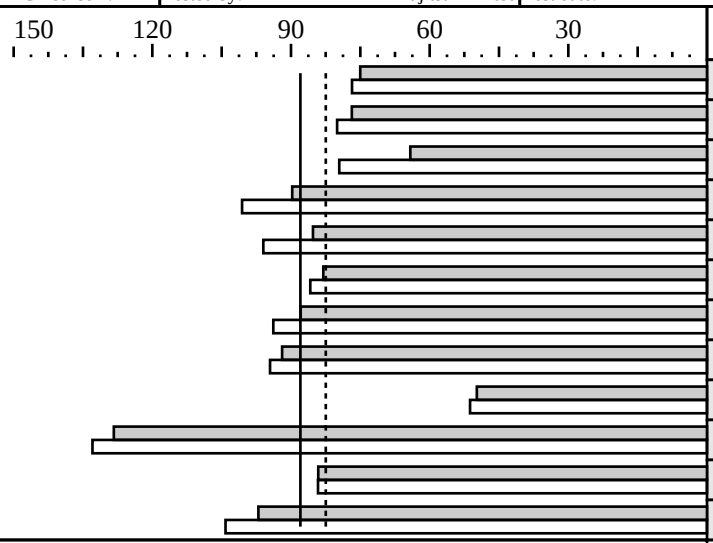

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	346	75.0	16	338	76.8
175.vpr	16	338	76.8	16	325	80.0
176.gcc	16	318	64.2	16	257	79.6
181.mcf	16	372	89.7	16	332	101
186.crafty	16	218	85.2	16	193	96.0
197.parser	16	402	83.0	16	389	85.8
252.eon	16	274	87.9	16	257	93.8
253.perlbmk	16	363	91.9	16	353	94.5
254.gap	16	410	49.8	16	398	51.3
255.vortex	16	275	128	16	265	133
256.bzip2	16	331	84.1	16	331	84.2
300.twolf	16	574	97.1	16	535	104

Hardware

CPU:	SPARC64 GP
CPU MHz:	675
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	4 to 16
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	32GB
Disk Subsystem:	2 x 18GB SCSI (10025rpm)
Other Hardware:	None

Software

Operating System:	Solaris 8 7/01
Compiler:	Fujitsu Parallelnavi 1.0.2 with patch 911403-01 Sun Forte Developer 6 update 2
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
Baseline (except 252.eon, for Parallelnavi 1.0.2): -Kfast_GP=3,largepage
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
(252.eon, for Forte Developer 6 update 2): -fast -xcrossfile -xarch=v8plus
fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
PASS1=-xprofile=collect:‘pwd‘/../feedback
PASS2=-xprofile=use:‘pwd‘/../feedback

Peak (for Parallelnavi 1.0.2):
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
164.gzip: -Kfast_GP=4
175.vpr: -Kfast_GP=4,staticclump,memalias,switchopt,cond,GREG,nounroll,largepage,onefile,NOFLTLD=3,xi=30
181.mcf: -Kfast_GP=2,nounroll,memalias,restp,prefetch=2,largepage -x-
197.parser: -Kfast_GP=4,switchopt,cond,staticclump,use_rodata,largepage
253.perlbmk: -Kfast_GP=4,memalias,switchopt,largepage,bcopy
254.gap: -Kfast_GP=3,largepage,memalias,unroll=4
256.bzip2: -Kfast_GP=3,largepage
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

300.twolf: -Kfast_GP=5,GREG,memalias,cfunc,staticclump,use_rodata,xi=10,largepage,nounroll,bcopy
(for Forte Developer 6 update 2)
 fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
 PASS1=-xprofile=collect:‘pwd‘/../feedback
 PASS2=-xprofile=use:‘pwd‘/../feedback
176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qiselect-funcalign=64
 -xarch=v8plus -xprefetch
186.crafty: -fast -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong
 -xregs=syst -xchip=ultra2 -xarch=v8plus -W2,-Amemopt
252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-restrict_g,-restrict
 -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xarch=v8plus
255.vortex: -fast -xsafe=mem -xcrossfile -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
 -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32 -Wc,-Qpeep-Sh0
 -xrestrict -xdepend -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xarch=v8plus -W2,-Amemopt

Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_CALLOC_PROTO

Note:
 System Tunables: (for /etc/system)
  consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
  shmsys:shminfo_shmmax=8589934592, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
 (for /etc/opt/FJSVpnrm/lpg.conf)
  TSS=512M, SHMSEGSIZE=256M
 ONESTEP=yes was set for all baseline and peak benchmarks.
 Feedback directed optimization was used for all baseline and peak benchmarks.
 Extended Interleave Mode enabled.