CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Compaq Computer Corporation
AlphaServer ES45 Model 68/1000

SPECfp2000 = 960

SPECfp_base2000 = 776

SPEC license #: 2 | Tested by: Compaq NH | Test date: Jun-2001 | Hardware Avail: Oct-2001 | Software Avail: Aug-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	243	660	195	822
171.swim	3100	206	1502	206	1502
172.mgrid	1800	348	517	225	799
173.applu	2100	283	741	224	938
177.mesa	1400	175	800	155	903
178.galgel	2900	177	1638	178	1628
179.art	2600	146	1782	119	2183
183.equake	1300	392	332	144	901
187.facerec	1900	186	1024	170	1116
188.ammp	2200	372	592	313	702
189.lucas	2000	225	891	204	980
191.fma3d	2100	299	703	229	917
200.sixtrack	1100	274	401	242	455
301.apsi	2600	405	641	395	658

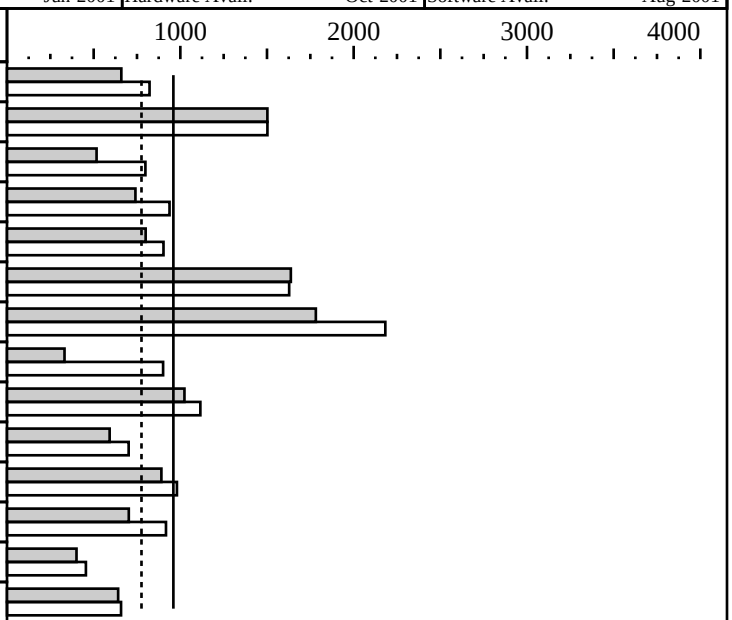

Hardware

CPU:	Alpha 21264C
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 4
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	8MB off chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	32GB
Disk Subsystem:	2x 10000 RPM: BD018635C4 BD0186349B
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1 +Patch Kit 2
Compiler:	Compaq C V6.4-214-46B59 Program Analysis Tools V2.0 Spike V5.2 DTK (1.461 46B5P) Compaq Fortran V5.4A-1472-46B2F Compaq Fortran 77 V5.4A-196-46B2F KAP Fortran V4.3 000607 KAP Fortran 77 V4.1 980926 KAP C V4.1 000607
File System:	AdvFs
System State:	Multi-user

Notes/Tuning Information

```
Baseline   C: cc  -arch ev6 -fast -O4 ONESTEP
     Fortran: f90 -arch ev6 -fast -O5 ONESTEP


Peak:
  All use -g3 -arch ev6 -non_shared ONESTEP
  Individual benchmark tuning:
   168.wupwise: kf77 -fast -O4 -pipeline -unroll 2 +PFB
      171.swim: f90 -fast -O5
     172.mgrid: kf77 -O5 -transform_loops -tune ev6 -unroll 8
     173.applu: f90 -fast -O5 +PFB
      177.mesa: cc -fast -O4 +CFB +IFB
    178.galgel: f90 -fast -O5
       179.art: kcc -fast -O4 -unroll 10 -ckapargs='-arl=4
                -ur=4' +PFB
    183.equake: cc -fast -xtaso_short -assume
                restricted_pointers -all -ldensemalloc -none +PFB
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    187.facerec: f90 -fast -O4 +PFB
       188.ammp: cc -fast -O4 -xtaso_short -assume
                 restricted_pointers
      189.lucas: kf90 -O5 -fkapargs='-ur=1' +PFB
      191.fma3d: kf90 -O4 -transform_loops +PFB
  200.sixtrack: f90 -fast -O5 -assume accuracy_sensitive
                 -notransform_loops +PFB
       301.apsi: kf90 -O5 -transform_loops -unroll 8
                 -fkapargs='-ur=1' +PFB

Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use       -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

Portability: galgel: -fixed

Information on UNIX V5.1 Patches can be found at
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

http://ftp1.service.digital.com/public/unix/v5.1/

Spike, and the Program Analysis Tools, are part of the Developers' Tool Kit Supplement, http://www.tru64unix.compaq.com/dtk/ . The features used in this SPEC submission will be available at the web site as a beta kit in August, 2001, and as a production release in October, 2001. The C compiler for this SPEC submission has been available at the same location, as a production release, since May, 2001.