CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER850 (675MHz)

SPECfp2000 = 493

SPECfp_base2000 = 359

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Oct-2001 | Hardware Avail: Nov-2001 | Software Avail: Dec-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	451	355	307	521
171.swim	3100	739	420	669	464
172.mgrid	1800	659	273	477	377
173.applu	2100	947	222	485	433
177.mesa	1400	400	350	373	375
178.galgel	2900	267	1088	228	1272
179.art	2600	546	476	105	2471
183.equake	1300	660	197	344	378
187.facerec	1900	377	505	300	633
188.ammp	2200	542	406	527	417
189.lucas	2000	651	307	640	312
191.fma3d	2100	750	280	744	282
200.sixtrack	1100	395	278	350	315
301.apsi	2600	685	379	677	384

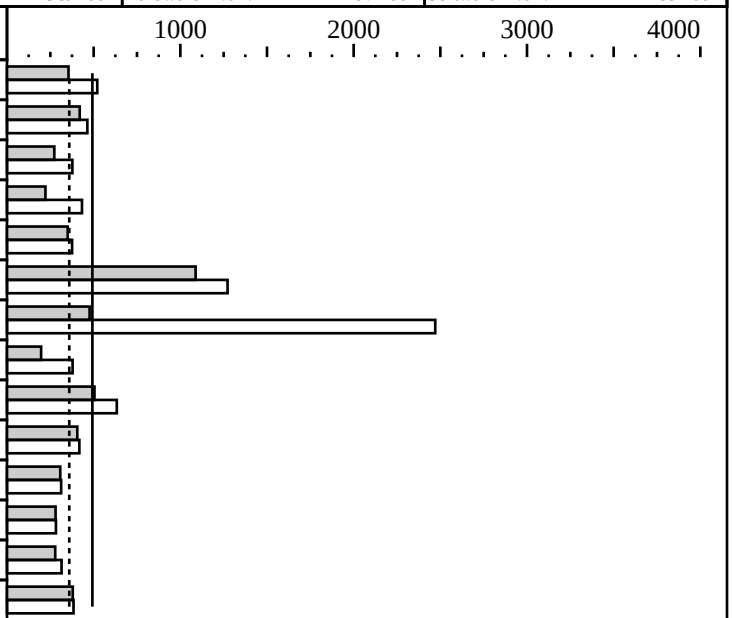

Hardware

CPU:	SPARC64 GP
CPU MHz:	675
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	4 to 16
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	2 x 18GB SCSI (10025rpm)
Other Hardware:	None

Software

Operating System:	Solaris 8 7/01
Compiler:	Fujitsu Parallelnavi 1.0.2 with patch 911403-01 Sun Forte Developer 6 update 2
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
FDO: (Parallelnavi 1.0.2)
    fdo_pre0=rm -rf ‘pwd‘/*.*.d
    PASS1=-Kpg    PASS2=-Kpu
FDO: (Forte Developer 6 update 2)
    fdo_pre0=rm -rf ‘pwd‘/../feedback.profile
    PASS1=-xprofile=collect:‘pwd‘/../feedback
    PASS2=-xprofile=use:‘pwd‘/../feedback
Baseline :
(using Fortran compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage FDO

Peak:
(using Fortran compiler of Parallelnavi 1.0.2)
 168.wupwise: -Kfast_GP=2,prefetch=4,nounroll -x dir=‘pwd‘/../../src -fs
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    FDO ONESTEP=yes
171.swim: -Kfast_GP=2,GREG,preex,ilfunc,prefetch=3,commonpad=152,prefetch_iteration=3,unroll=2,nogs,frecipro
    -O4 -fs -dn
172.mgrid: -Kfast_GP=2,preex,GREG,commonpad=144,unroll=3,largepage,prefetch=3
    -O4 -fs
178.galgel: -Kfast_GP=2,GREG,largepage,preex,unroll=2,prefetch_iteration=2,commonpad=24
    -O4 -lssl2mtfma -fs FDO
    RM_SOURCES=lapak.f90
189.lucas: -Kfast_GP=2,GREG,preex,largepage,nounroll -O4 -fs FDO
191.fma3d: -Kfast_GP=2,preex,GREG,nounroll,prefetch=4,largepage -O4 -fs FDO
200.sixtrack: -Kfast_GP=2,GREG,noprefetch,unroll=4,largepage,frecipro -fs
301.apsi: -Kfast_GP=2,GREG,preex,largepage,unroll=2 -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
188.ammp: -Kfast_GP=2,GREG,popt,prefetch=4,preex,preload,largepage,fuse,unroll=3 -x-

(using FORTRAN77 compiler of Forte Developer 6 update 2)
173.applu: -fast -Qoption iropt -whole,-Adata_access,-Mt6000,-Mm12000,-Mr40000,-Ma400 -xarch=v8plus -dn
    ONESTEP=yes

(using FORTRAN90 compiler of Forte Developer 6 update 2)
187.facerec: -fast -xarch=v9 FDO ONESTEP=yes

(using C compiler of Forte Developer 6 update 2)
177.mesa: -fast -xcrossfile -xrestrict -xalias_level=std -xregs=syst -Wc,-Qgsched-trace_late=1,-Qgsched-trace_spec_load=1
    -xarch=v8plus -W2,-Amemopt -dn
    FDO ONESTEP=yes
179.art: -fast -xalias_level=strong -xdepend -xregs=syst -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm -dn FDO ONESTEP=yes
183.equake: -fast -xalias_level=strong -xdepend -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm FDO ONESTEP=yes

Portability:
 (for Parallelnavi 1.0.2)
   178.galgel: -Am -Fixed
   187.facerec: -Am
   191.fma3d: -Am

Note:
 System Tunables: (for /etc/system)
  consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
  shmsys:shminfo_shmmax=8589934592, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
 (for /etc/opt/FJSVpnrm/lpg.conf)
  TSS=512M, SHMSEGSIZE=256M
 Feedback directed optimization was used for all baseline benchmarks and peak benchmarks
 except following peak benchmarks: 171.swim, 172.mgrid, 173.applu, 188.ammp, 200.sixtrack.
 Only one CPU installed on the system board.
 Extended Interleave Mode enabled.
```