CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade Model 2050

SPECint_rate2000 = 14.0

SPECint_rate_base2000 = 12.3

SPEC license #: 6 | Tested by: Sun Microsystems, Palo Alto | Test date: Nov-2001 | Hardware Avail: Feb-2002 | Software Avail: Feb-2002

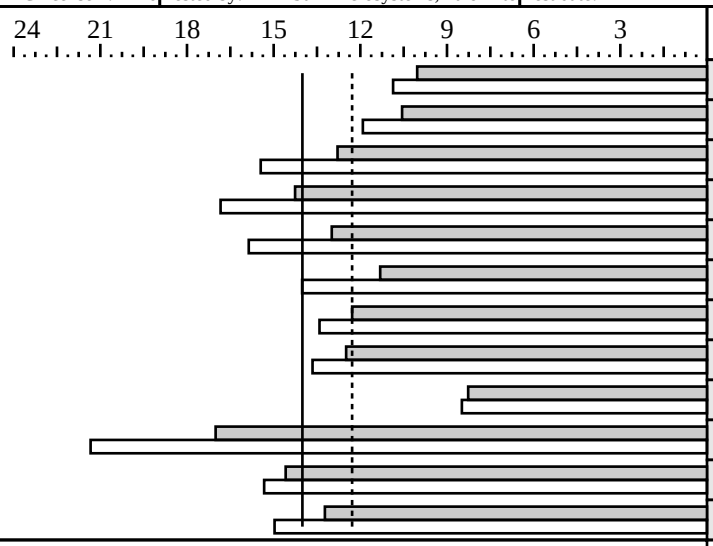

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	324	10.0	2	299	10.9
175.vpr	2	308	10.6	2	273	11.9
176.gcc	2	200	12.8	2	165	15.4
181.mcf	2	293	14.3	2	248	16.8
186.crafty	2	179	13.0	2	146	15.9
197.parser	2	369	11.3	2	298	14.0
252.eon	2	246	12.3	2	225	13.4
253.perlbmk	2	334	12.5	2	306	13.7
254.gap	2	309	8.27	2	301	8.49
255.vortex	2	259	17.0	2	207	21.3
256.bzip2	2	239	14.6	2	227	15.3
300.twolf	2	526	13.2	2	465	15.0

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1050
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	2
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	8GB
Disk Subsystem:	2 x 73GB
Other Hardware:	None

Software

Operating System:	Solaris 8 10/01
Compiler:	C: Forte Developer 7 EA C++: Forte Developer 6 update 2
File System:	tmpfs
System State:	Multi-User

Notes/Tuning Information

```
Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
          -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Base Flags:
 Base C   flags: -fast -xcrossfile -ll2amm -xprofile
 Base C++ flags: -fast -xcrossfile -xprofile

Peak Flags:
 164.gzip: -xO5 -xtarget=native -xalias_level=std -W2,-whole -xcrossfile -W2,-Ainline -xprofile
 175.vpr: -fast -xalias_level=std -xcrossfile -xsfpconst -xdepend -W2,-whole
          -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
          -xregs=syst -lmopt -xprofile
 176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm -xprofile
 181.mcf: -fast -xcrossfile -xprefetch -xdepend
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
          -Wc,-Qms_pipe-pref,-Qlp=1-fa=1-av=64-t=3-fl=1 -lprism32 -xprofile
 186.crafty: -fast -xF -xinline= -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4
            -xalias_level=strong -xregs=syst -W2,-Ashort_ldst,-Aivel:duplicate_loops
            -xprofile
 197.parser: -fast -xdepend -xprefetch=no%auto -xcrossfile -xregs=syst
          -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong -Wc,-Qipa:valueprediction -xprofile
 252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-xrestrict
          -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xprofile
              -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile
 253.perlbmk: -xO5 -xtarget=native -xcrossfile -xalias_level=std -xsafe=mem
              -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1
              -Wc,-Qinline_memcpy=32 -Wc,-Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap: -fast -xcrossfile -xalias_level=std -xprefetch -W2,-whole -lprism32 -xprofile
 255.vortex: -fast -xcrossfile -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1
            -Wc,-Qinline_memcpy=32 -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
             -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32
             -Wc,-Qpeep-Sh0 -xrestrict -xdepend -ll2amm -lprism32 -xprofile
 256.bzip2: -fast -W2,-Abopt -xcrossfile -xalias_level=strong
            -Wc,-Qiselect-funcalign=32 -xdepend -xregs=syst -xprofile
 300.twolf: -fast -xalias_level=strong -xsafe=mem -xcrossfile -xprefetch=no%auto
            -Wc,-Qms_pipe+intdivusefp -xprofile

Forte Developer 7 EA (Early Access) will ship by Feb-2002
Forte Developer 7 (final) will ship May-2002

ONESTEP=yes for all benchmarks in base and peak

Shell Environments:
 LD_LIBRARY_PATH=/usr/lib:/opt/fd7/lib/v8plusb:/opt/fd7/YNH/lib/v8plusb
 PRISM_HEAP=268435456
 PRISM_MODE=2

 Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
 set shmsys:shminfo_shmmin=1
 set shmsys:shminfo_shmmax=1477846784
 set shmsys:shminfo_shmmni=256
 set shmsys:shminfo_shmseg=400

System configuration details located (as of Nov 2001) at
     http://www.sun.com/desktop/products/ws.html
```