CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 1000 Model 900 Cu

SPECint2000 = 533

SPECint_base2000 = 470

SPEC license #: 6 | Tested by: Sun Microsystems, Palo Alto | Test date: Nov-2001 | Hardware Avail: Dec-2001 | Software Avail: Feb-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	374	374	345	406
175.vpr	1400	346	405	304	461
176.gcc	1100	218	505	190	579
181.mcf	1800	296	608	259	695
186.crafty	1000	207	482	169	590
197.parser	1800	426	423	343	524
252.eon	1300	286	455	262	497
253.perlbmk	1800	385	468	355	508
254.gap	1100	333	330	324	340
255.vortex	1900	293	649	230	827
256.bzip2	1500	275	545	261	574
300.twolf	3000	610	492	539	557

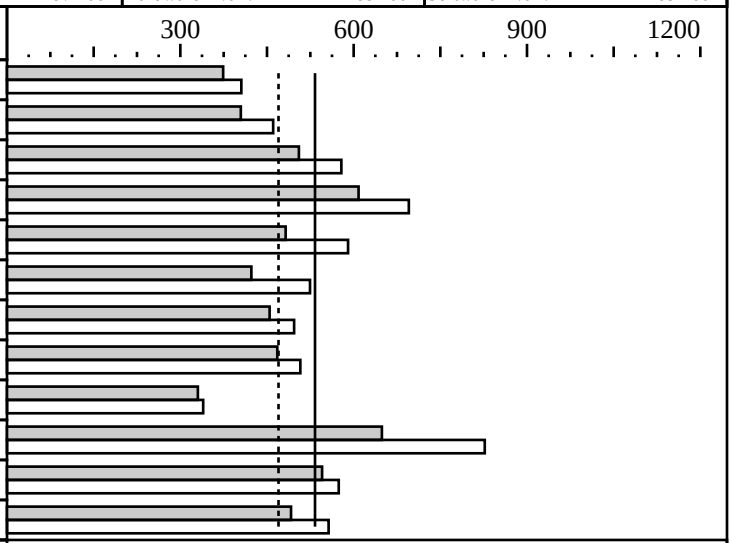

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	900
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	None
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	2GB
Disk Subsystem:	1 x 36GB
Other Hardware:	--

Software

Operating System:	Solaris 8 10/01
Compiler:	C: Forte Developer 7 EA C++: Forte Developer 6 update 2
File System:	tmpfs
System State:	Multi-User

Notes/Tuning Information

```
Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
          -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Base Flags:
 Base C   flags: -fast -xcrossfile -ll2amm -xprofile
 Base C++ flags: -fast -xcrossfile -xprofile

Peak Flags:
 164.gzip: -xO5 -xtarget=native -xalias_level=std -W2,-whole -xcrossfile -W2,-Ainline -xprofile
 175.vpr: -fast -xalias_level=std -xcrossfile -xsfpconst -xdepend -W2,-whole
          -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
          -xregs=syst -lmopt -xprofile
 176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm -xprofile
 181.mcf: -fast -xcrossfile -xprefetch -xdepend
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
          -Wc,-Qms_pipe-pref,-Qlp=1-fa=1-av=64-t=3-fl=1 -lprism32 -xprofile
 186.crafty: -fast -xF -xinline= -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4
             -xalias_level=strong -xregs=syst -W2,-Ashort_ldst,-Aivel:duplicate_loops
             -xprofile
 197.parser: -fast -xdepend -xprefetch=no%auto -xcrossfile -xregs=syst
          -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong -Wc,-Qipa:valueprediction -xprofile
 252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-xrestrict
          -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xprofile
              -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile
 253.perlbmk: -xO5 -xtarget=native -xcrossfile -xalias_level=std -xsafe=mem
              -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1
              -Wc,-Qinline_memcpy=32 -Wc,-Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap: -fast -xcrossfile -xalias_level=std -xprefetch -W2,-whole -lprism32 -xprofile
 255.vortex: -fast -xcrossfile -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1
            -Wc,-Qinline_memcpy=32 -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
             -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32
             -Wc,-Qpeep-Sh0 -xrestrict -xdepend -ll2amm -lprism32 -xprofile
 256.bzip2: -fast -W2,-Abopt -xcrossfile -xalias_level=strong
            -Wc,-Qiselect-funcalign=32 -xdepend -xregs=syst -xprofile
 300.twolf: -fast -xalias_level=strong -xsafe=mem -xcrossfile -xprefetch=no%auto
            -Wc,-Qms_pipe+intdivusefp -xprofile

Forte Developer 7 (final) will ship May-2002

ONESTEP=yes for all benchmarks in base and peak

Shell Environments:
 LD_LIBRARY_PATH=/usr/lib:/opt/fd7/lib/v8plusb:/opt/fd7/YNH/lib/v8plusb
 PRISM_HEAP=268435456
 PRISM_MODE=2

 Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
 set shmsys:shminfo_shmmin=1
 set shmsys:shminfo_shmmax=1477846784
 set shmsys:shminfo_shmmni=256
 set shmsys:shminfo_shmseg=400

System configuration details located (as of Dec 2001) at
     http://www.sun.com/desktop/products/ws.html
```