CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3800 64X 600MHz R14k

SPECint_rate2000 = 362

SPECint_rate_base2000 = 350

SPEC license #: 4 | Tested by: SGI | Test date: Feb-2002 | Hardware Avail: Jan-2002 | Software Avail: Nov-2001

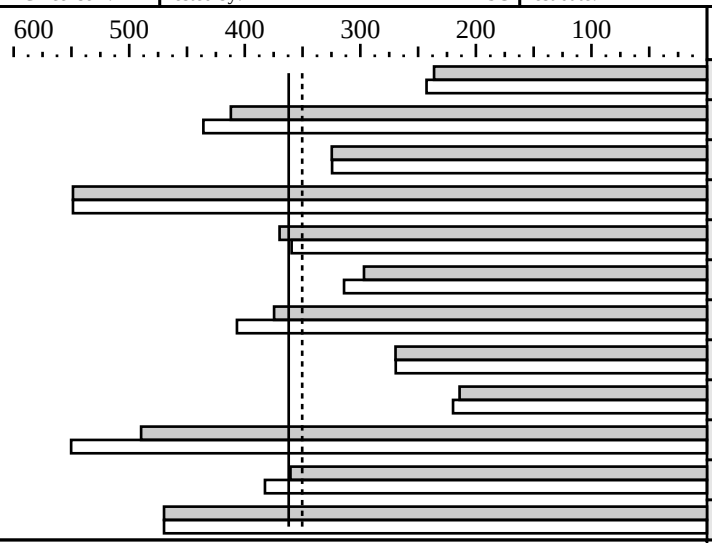

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	64	440	236	64	428	243
175.vpr	64	252	412	64	238	436
176.gcc	64	251	325	64	252	324
181.mcf	64	244	549	64	244	549
186.crafty	64	201	370	64	207	359
197.parser	64	450	297	64	425	314
252.eon	64	258	375	64	237	407
253.perlbmk	64	496	270	64	496	269
254.gap	64	381	214	64	372	220
255.vortex	64	288	490	64	256	550
256.bzip2	64	309	360	64	291	383
300.twolf	64	474	470	64	474	470

Hardware

CPU:	R14000
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	64 cores, 64 chips, 1 core/chip
CPU(s) orderable:	4-512
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	64 GB
Disk Subsystem:	1 x 18 GB FC, 4 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.14m
Compiler:	MIPSpro 7.3.1.3m C, C++ SCSL 1.4 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip35 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip35 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
 Portability Flags:
   176.gcc: -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   252.eon: -lm
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
            -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip35 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip35 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
 .        -LNO:prefetch_ahead=2 -INLINE:aggressive=on
 .       -OPT:Olimit=0:alias=disjoint:alias=restrict -CG:ld_latency=10 -lmalloc (FEEDBACK)
 181.mcf: basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3800 64X 600MHz R14k

SPECint_rate2000 = 362
SPECint_rate_base2000 = 350

SPEC license #: 4 | Tested by: SGI | Test date: Feb-2002 | Hardware Avail: Jan-2002 | Software Avail: Nov-2001

Notes/Tuning Information (Continued)

176.gcc: -Ofast=ip35 -CG:ld_latency=4 (FEEDBACK)
186.crafty: -Ofast=ip35 -LNO:prefetch=0 -OPT:goto=off -CG:ld_latency=4 -lmalloc (FEEDBACK)
197.parser: -Ofast=ip35 -IPA:min_hot=14 (FEEDBACK)
252.eon: -Ofast=ip35 -LNO:prefetch=0 -LANG:exceptions=off -CG:ld_latency=4 -lmalloc -lm
. (FEEDBACK)
253.perlbmk: -Ofast=ip35 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip35 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -CG:ld_latency=8 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip35 -IPA:use_intrinsic
. -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0 -CG:ld_latency=5
. -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip35 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: basepeak=yes
The following O/S parameters were set:
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
systune -i ; r12k_bdiag = 0x4000000
limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
Jobs are submitted using dplace. Contents of the placement file submit.pf:
memories 1 in topology physical near $NODE
threads 1
run thread 0 on memory 0 using cpu $CPU
The first disk mentioned in the Disk Subsystem is the system disk. A striped
XFS filesystem was created using the rest of the disks and the benchmark was
run on this.