CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3400 16X 600MHz R14k

SPECfp_rate2000 = 83.2

SPECfp_rate_base2000 = 77.6

SPEC license #: 4 | Tested by: SGI | Test date: Feb-2002 | Hardware Avail: Jan-2002 | Software Avail: Nov-2001

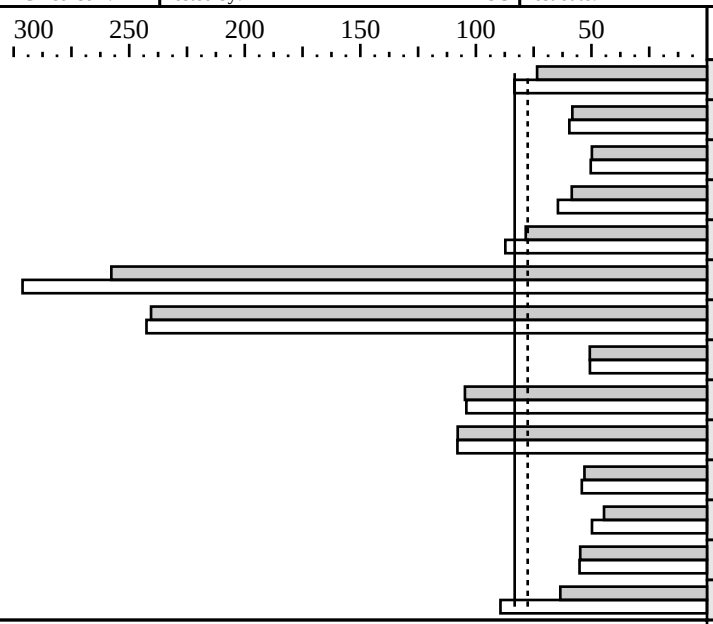

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	16	404	73.5	16	356	83.3
171.swim	16	987	58.3	16	966	59.6
172.mgrid	16	671	49.8	16	664	50.3
173.applu	16	666	58.5	16	604	64.5
177.mesa	16	331	78.4	16	298	87.3
178.galgel	16	209	258	16	182	296
179.art	16	201	241	16	199	243
183.equake	16	476	50.7	16	476	50.7
187.facerec	16	337	105	16	339	104
188.ammp	16	379	108	16	378	108
189.lucas	16	700	53.0	16	685	54.2
191.fma3d	16	875	44.6	16	783	49.8
200.sixtrack	16	372	54.9	16	370	55.2
301.apsi	16	760	63.5	16	540	89.4

Hardware

CPU:	R14000
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	4-32
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16 GB
Disk Subsystem:	1 x 18 GB FC, 4 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.14m
Compiler:	MIPSpro 7.3.1.3m C, Fortran90 SCSL 1.4 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
  PASS1 : -Ofast=ip35 -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
  PASS2 : -Ofast=ip35 -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip35 -LNO:fusion=2
Portability Flags:
  178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
  PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
  PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip35 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip35 -CG:ld_latency=10
172.mgrid: -Ofast=ip35 -LNO:fusion=2
173.applu: -Ofast=ip35 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip35 -OPT:goto=off -LNO:opt=0 -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip35 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
 179.art: -Ofast=ip35 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
 183.equake: -Ofast=ip35 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
 187.facerec: -Ofast=ip35 -LNO:fusion=2
 188.ammp: -Ofast=ip35 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip35 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
 191.fma3d: -Ofast=ip35 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.           -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
 200.sixtrack:= -Ofast=ip35 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
 301.apsi: -Ofast=ip35 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
 The following O/S parameters were set:
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000
   limit stacksize 500000
 The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
 Jobs are submitted using dplace. Contents of the placement file submit.pf:
 memories 1 in topology physical near $NODE
 threads 1
 run thread 0 on memory 0 using cpu $CPU
 The first disk mentioned in the Disk Subsystem is the system disk. A striped
 XFS filesystem was created using the rest of the disks and the benchmark was
 run on this.
```