CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI

SGI Origin 300 32X 600MHz R14000A

SPECfp_rate2000 = 153

SPECfp_rate_base2000 = 144

SPEC license #: 4 | Tested by: SGI | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

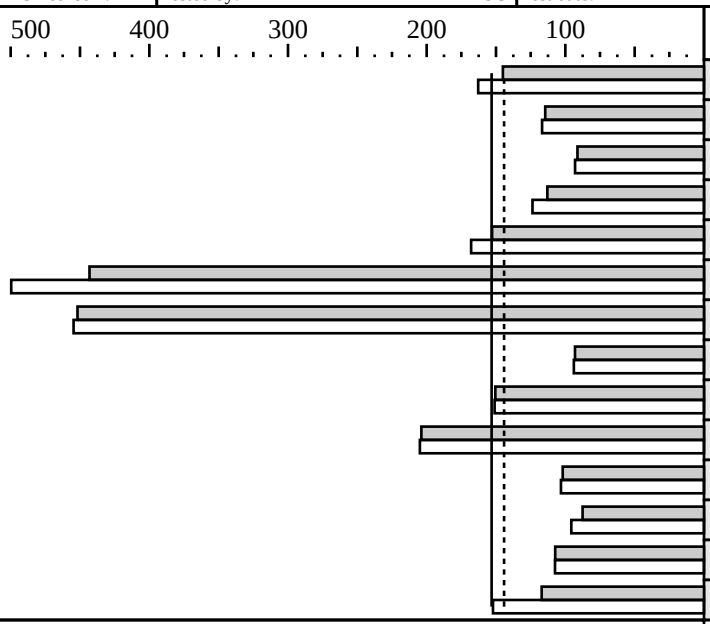

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	409	145	32	365	163
171.swim	32	1005	114	32	985	117
172.mgrid	32	732	91.2	32	719	93.0
173.applu	32	690	113	32	630	124
177.mesa	32	340	153	32	309	168
178.galgel	32	243	443	32	215	500
179.art	32	214	452	32	212	455
183.equake	32	519	93.0	32	514	93.9
187.facerec	32	469	150	32	467	151
188.ammp	32	401	204	32	399	205
189.lucas	32	729	102	32	720	103
191.fma3d	32	890	87.6	32	815	95.7
200.sixtrack	32	381	107	32	380	107
301.apsi	32	824	117	32	634	152

Hardware

CPU:	R14000
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	2-32
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	4MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	32 GB
Disk Subsystem:	1 x 18 GB FC, 4 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.16f
Compiler:	MIPSpro 7.3.1.3m C, Fortran90 SCSL 1.4 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
  PASS1 : -Ofast=ip35 -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
  PASS2 : -Ofast=ip35 -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip35 -LNO:fusion=2
Portability Flags:
  178.galgel: -fixedform
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
  PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
  PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip35 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip35 -CG:ld_latency=10
172.mgrid: -Ofast=ip35 -LNO:fusion=2
173.applu: -Ofast=ip35 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip35 -OPT:goto=off -LNO:opt=0 -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip35 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
 179.art: -Ofast=ip35 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
 183.equake: -Ofast=ip35 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
 187.facerec: -Ofast=ip35 -LNO:fusion=2
 188.ammp: -Ofast=ip35 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip35 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
 191.fma3d: -Ofast=ip35 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.           -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
 200.sixtrack:= -Ofast=ip35 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
 301.apsi: -Ofast=ip35 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
 The following O/S parameters were set:
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000 ; gather_craylink_routerstats = 0
   limit stacksize 500000
 The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
 Jobs are submitted using dplace. Contents of the placement file submit.pf:
 memories 1 in topology physical near $NODE
 threads 1
 run thread 0 on memory 0 using cpu $CPU
 The first disk mentioned in the Disk Subsystem is the system disk. A striped
 XFS filesystem was created using the rest of the disks and the benchmark was
 run on this.
```