CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers PRIMEPOWER650 (810MHz)

SPECint2000 = 624

SPECint_base2000 = 512

SPEC license #: 22 | Tested by: Fujitsu Limited | Test date: Jun-2002 | Hardware Avail: Sep-2002 | Software Avail: May-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	300	467	255	549
175.vpr	1400	302	463	260	539
176.gcc	1100	422	261	201	547
181.mcf	1800	302	595	271	664
186.crafty	1000	194	516	149	673
197.parser	1800	333	541	298	604
252.eon	1300	204	636	184	706
253.perlbmk	1800	303	594	251	716
254.gap	1100	343	320	335	328
255.vortex	1900	235	809	166	1145
256.bzip2	1500	269	558	246	610
300.twolf	3000	473	634	439	684

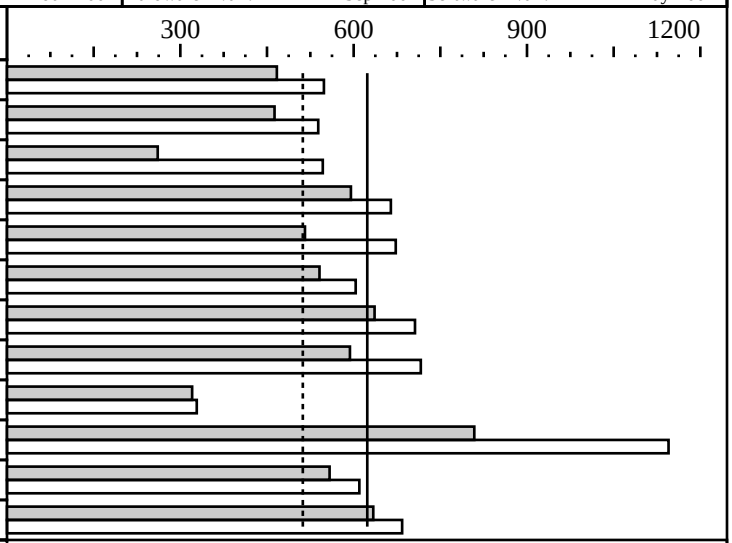

Hardware

CPU:	SPARC64 GP
CPU MHz:	810
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2 to 8
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	36GB SCSI
Other Hardware:	Ethernet

Software

Operating System:	Solaris 8 2/02 with patches 108434-07 and 108435-07.
Compiler:	Fujitsu Parallelnavi 1.0.2 with patches 911403-01 and 911746-01. Sun ONE Studio 7 with patches 111704-01, 111705-01, 111706-01, 111708-01, 111709-01, 111715-01 and 111716-01 Sun Performance Library 7
File System:	ufs
System State:	single user

Notes/Tuning Information

```
Baseline (except 252.eon, for Parallelnavi 1.0.2): -Kfast_GP=3,largepage
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
(252.eon, for Sun ONE Studio 7): -fast -xcrossfile -xtarget=ultra3
fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
PASS1=-xprofile=collect:‘pwd‘/../feedback
PASS2=-xprofile=use:‘pwd‘/../feedback

Peak
(for Sun ONE Studio 7)
 fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
 PASS1=-xprofile=collect:‘pwd‘/../feedback
 PASS2=-xprofile=use:‘pwd‘/../feedback
164.gzip: -xO5 -xtarget=ultra3 -xalias_level=std -W2,-whole -xcrossfile
    -W2,-Ainline -xprefetch -Wc,-Qgsched-trace_late=1,-Qgsched-spec_load=1 -ll2amm
175.vpr: -fast -xarch=v8plusb -xalias_level=std -xcrossfile -xsfpconst
    -xdepend -W2,-whole,-Mt600,-Mr4000 -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
    -xregs=syst -lprism32 -lmopt -lm
176.gcc: -fast -xtarget=ultra3 -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm
```

CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers PRIMEPOWER650 (810MHz)

SPECint2000 = 624

SPECint_base2000 = 512

SPEC license #: 22 | Tested by: Fujitsu Limited | Test date: Jun-2002 | Hardware Avail: Sep-2002 | Software Avail: May-2002

Notes/Tuning Information (Continued)

186.crafty: -fast -xtarget=ultra3 -xarch=v8plus -xF -xinline= -xcrossfile -Wc,-Qgsched-spec_load=1,-Qiselect-funcalign=64
-xalias_level=strong -xregs=syst -W2,-Ashort_ldst,-Aivel:duplicate_loops -xprefetch=auto,latx:5.0

197.parser: -fast -xarch=v8plusb -xdepend -xprefetch=no%auto
-xcrossfile -xregs=syst -Wc,-Qgsched-trace_late=1,-Qgsched-T4
-xalias_level=strong -Wc,-Qipa:valueprediction
-W2,-Ashort_ldst,-Mt5000 -Wc,-Qiselect-funcalign=32 -lprism32

252.eon: -fast -xtarget=ultra3 -xcrossfile -xalias_level=compatible -xsafe=mem -Qoption iropt
-Mt2000,-xrestrict -Qoption cg -Qgsched-trace_spec_load=1,-Qgsched-trace_late=1

253.perlbmk: -xO5 -xtarget=ultra3 -xarch=v8plusb -xcrossfile -xalias_level=strong -xsafe=mem
-Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1 -Wc,-Qinline_memcpy=32
-Wc,-Qiselect-funcalign=32,-Qicache-chbab=1 -Wc,-Qiselect-sw_pf_tbl_th=20 -W2,-Adata_access -xprefetch=auto,latx:5.0 -ll2amm -dn

255.vortex: -fast -xtarget=ultra3 -xcrossfile -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt600,-Mr13000,-crit
-Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32 -Wc,-Qpeep-Sh0
-xrestrict -xdepend -W2,-Amemopt
-ll2amm -lprism32

256.bzip2: -fast -xtarget=ultra3 -W2,-whole,-crit
-xcrossfile -xalias_level=strong -Wc,-Qiselect-funcalign=32
-xdepend -xregs=syst -xsfpconst -Wc,-Qgsched-trace_spec_load=1 -xsafe=mem -ll2amm -lprism32

(for Parallelnavi 1.0.2):
fdo_pre0=rm -rf ‘pwd‘/*.fbk
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk

181.mcf: -Kfast_GP=2,GREG,eval,preex,popt,unroll=2,prefetch=4,largepage,preload -x-

254.gap: -Kfast_GP=3,popt,eval,cfunc,largepage,xi=10

300.twolf: -Kfast_GP=5,eval,GREG,popt,cfunc,staticclump,use_rodata,xi=10,largepage,bcopy,nounroll,prefetch=4

Portability:
176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon: -library=iostream
253.perlbmk: -DSPEC_CPU2000_SOLARIS
254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_CALLOC_PROTO

Note:
System Tunables: (for /etc/system)
consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
shmsys:shminfo_shmmax=1477846784, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024,shminfo_shmmin=1
(for /etc/opt/FJSVpnrm/lpg.conf)
TSS=512M, SHMSEGSIZE=256M
Shell Environments:
LD_LIBRARY_PATH="/usr/lib:/opt/FD7/SUNWspro/lib/v8plusb:/opt/FD7/SUNWspro/prod/lib/v8plusb:/opt/FSUNf90/lib"
LD_LIBRARY_PATH_64="/usr/lib/64:/opt/FD7/SUNWspro/lib/v9:/opt/FD7/SUNWspro/prod/lib/v9"
PRISM_HEAP=268435456
PRISM_MODE=2
ONESTEP=yes was set for all baseline and peak benchmarks.
Feedback directed optimization was used for all baseline and peak benchmarks.
Small configuration memory system mode used ("4cpu mode", enabled via front panel).
System board used with only one CPU present.