CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI

SGI Origin 3800 256X 600MHz R14000A

SPECfp_rate2000 = 1215

SPECfp_rate_base2000 = 1130

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2002 | Hardware Avail: Jan-2002 | Software Avail: Aug-2002

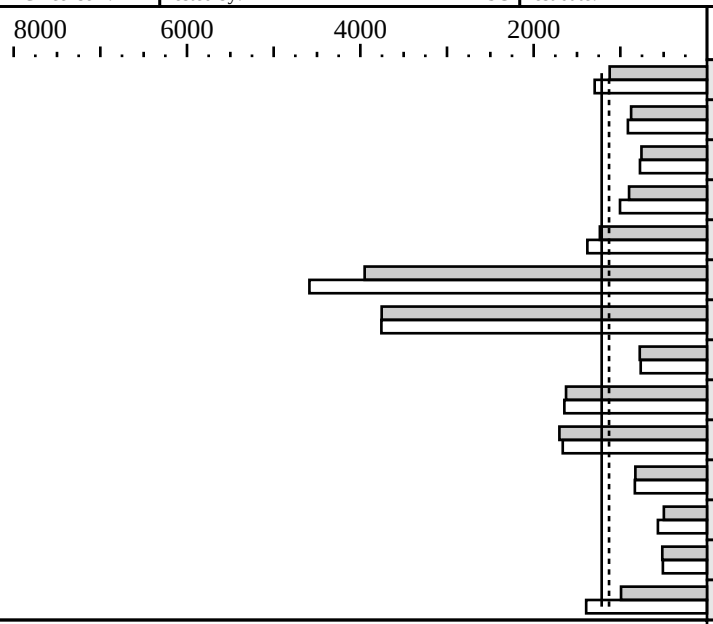

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	256	423	1123	256	367	1296
171.swim	256	1051	876	256	1009	913
172.mgrid	256	707	756	256	691	773
173.applu	256	694	899	256	621	1004
177.mesa	256	336	1236	256	301	1381
178.galgel	256	218	3950	256	188	4587
179.art	256	206	3754	256	206	3757
183.equake	256	497	776	256	505	765
187.facerec	256	347	1626	256	343	1646
188.ammp	256	384	1703	256	393	1664
189.lucas	256	719	826	256	713	832
191.fma3d	256	1253	498	256	1101	567
200.sixtrack	256	633	516	256	642	509
301.apsi	256	778	992	256	554	1394

Hardware

CPU:	R14000A
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	256 cores, 256 chips, 1 core/chip
CPU(s) orderable:	4-512
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 GB
Disk Subsystem:	1 x 18 GB, 10 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.17f
Compiler:	MIPSpro 7.3.1.3m C, Fortran90 SCSL 1.4.0.1 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
  PASS1 : -Ofast=ip35 -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
  PASS2 : -Ofast=ip35 -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip35 -LNO:fusion=2
Portability Flags:
  178.galgel: -fixedform
Peak optimization flags:
note:  all occurrences of (FEEDBACK) below means compiled with a two-step process:
  PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
  PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip35 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000
             -INLINE:aggressive=on -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip35 -CG:ld_latency=10
172.mgrid: -Ofast=ip35 -LNO:fusion=2
173.applu: -Ofast=ip35 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2 -CG:ld_latency=3
177.mesa: -Ofast=ip35 -OPT:goto=off -LNO:opt=0 -CG:ld_latency=6 (FEEDBACK)
178.galgel: -Ofast=ip35 -LNO:ou_max=7 -CG:ld_latency=3 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
 179.art: -Ofast=ip35 -LNO:prefetch=0 -IPA:min_hot=15 -CG:ld_latency=3 (FEEDBACK)
 183.equake: -Ofast=ip35 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
 187.facerec: -Ofast=ip35 -LNO:fusion=2
 188.ammp: -Ofast=ip35 -OPT:goto=off -IPA:space=500:plimit=900 -CG:ld_latency=7 (FEEDBACK)
189.lucas: -Ofast=ip35 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
 191.fma3d: -Ofast=ip35 -bigp_off -LNO:prefetch=0 -CG:ld_latency=2
.           -OPT:goto=off:unroll_size=160:unroll_times_max=4 (FEEDBACK)
 200.sixtrack:= -Ofast=ip35 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
 301.apsi: -Ofast=ip35 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
 The following O/S parameters were set:
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   systune -i ; r12k_bdiag = 0x4000000
   limit stacksize 500000
 The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
 Jobs are submitted using dplace. Contents of the placement file submit.pf:
 memories 1 in topology physical near $NODE
 threads 1
 run thread 0 on memory 0 using cpu $CPU
 The first disk mentioned in the Disk Subsystem is the system disk. A striped
 XFS filesystem was created using the rest of the disks and the benchmark was
 run on this.
```