CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI

SGI Origin 3800 256X 600MHz R14000A

SPECint_rate2000 = 1402

SPECint_rate_base2000 = 1344

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2002 | Hardware Avail: Jan-2002 | Software Avail: Aug-2002

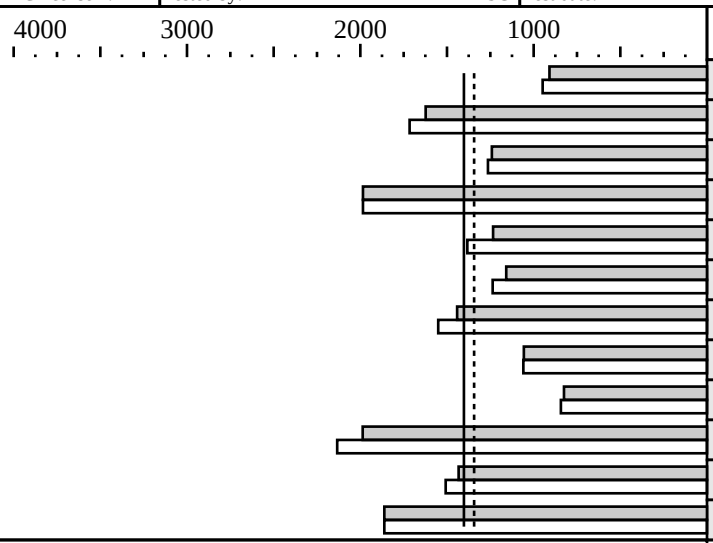

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	256	457	909	256	438	948
175.vpr	256	256	1623	256	242	1716
176.gcc	256	263	1241	256	258	1264
181.mcf	256	269	1985	256	269	1985
186.crafty	256	241	1234	256	215	1383
197.parser	256	462	1158	256	432	1237
252.eon	256	268	1442	256	249	1551
253.perlbmk	256	506	1057	256	505	1059
254.gap	256	396	825	256	388	843
255.vortex	256	284	1986	256	264	2133
256.bzip2	256	311	1433	256	295	1508
300.twolf	256	479	1862	256	479	1862

Hardware

CPU:	R14000A
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	256 cores, 256 chips, 1 core/chip
CPU(s) orderable:	4-512
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 GB
Disk Subsystem:	1 x 18 GB, 10 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.17f
Compiler:	MIPSpro 7.3.1.3m C, C++ SCSL 1.4.0.1 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip35 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip35 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
 Portability Flags:
   176.gcc: -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   252.eon: -lm
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
            -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurences of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip35 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip35 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
 .        -LNO:prefetch_ahead=2 -INLINE:aggressive=on
 .       -OPT:Olimit=0:alias=disjoint:alias=restrict -CG:ld_latency=10 -lmalloc (FEEDBACK)
 181.mcf: basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

176.gcc: -Ofast=ip35 -CG:ld_latency=4 (FEEDBACK)
186.crafty: -Ofast=ip35 -LNO:prefetch=0 -OPT:goto=off -CG:ld_latency=4 -lmalloc (FEEDBACK)
197.parser: -Ofast=ip35 -IPA:min_hot=14 (FEEDBACK)
252.eon: -Ofast=ip35 -LNO:prefetch=0 -LANG:exceptions=off -CG:ld_latency=4 -lmalloc -lm
. (FEEDBACK)
253.perlbmk: -Ofast=ip35 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip35 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -CG:ld_latency=8 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip35 -IPA:use_intrinsic
. -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0 -CG:ld_latency=5
. -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip35 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: basepeak=yes
The following O/S parameters were set:
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
systune -i ; r12k_bdiag = 0x4000000
limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
Jobs are submitted using dplace. Contents of the placement file submit.pf:
memories 1 in topology physical near $NODE
threads 1
run thread 0 on memory 0 using cpu $CPU
The first disk mentioned in the Disk Subsystem is the system disk. A striped
XFS filesystem was created using the rest of the disks and the benchmark was
run on this.