CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.26 GHz, Pentium 4 processor)

SPECint2000 = 847

SPECint_base2000 = 843

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	149	941	148	943
175.vpr	1400	264	530	264	529
176.gcc	1100	107	1030	107	1033
181.mcf	1800	296	607	296	608
186.crafty	1000	114	873	116	864
197.parser	1800	223	808	223	808
252.eon	1300	134	967	125	1038
253.perlbmk	1800	175	1027	175	1026
254.gap	1100	100	1098	100	1098
255.vortex	1900	133	1424	134	1413
256.bzip2	1500	224	669	224	670
300.twolf	3000	534	562	533	563

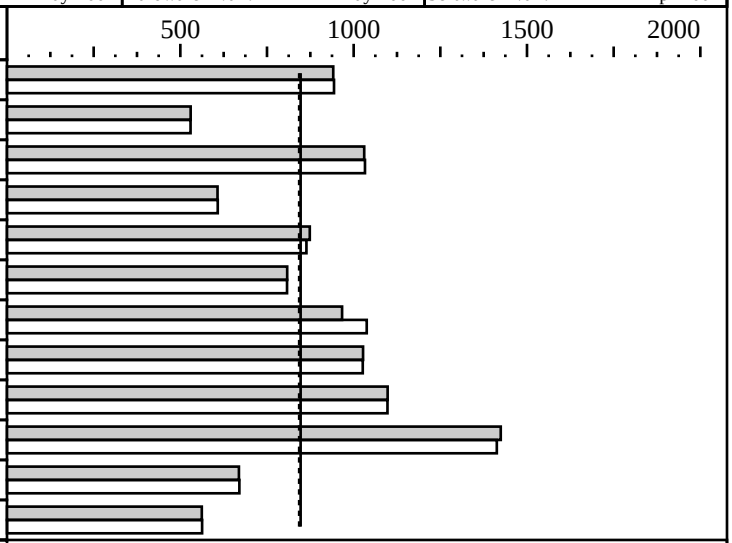

Hardware

CPU:	Pentium 4 processor (2.26 GHz, 533 MHz bus)
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800-40 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -QxW -Qipo -O3 +FDO
Base tuning for C++ programs: -QxW -Qipo -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxW -Qipo -Oa -O3 +FDO
175.vpr:      -QxW -Qwp_ipo -O3 +FDO
176.gcc:      -QxW -Qipo -O3 +FDO
181.mcf:      -QxW -Qipo -O3 +FDO
186.crafty:   -QxW -Qipo -Oa -O3 +FDO
197.parser:   -QxW -Qipo -O3 +FDO
252.eon:      -QxW -Qipo -O3 +FDO
253.perlbmk:  -QxW -Qipo -O3 +FDO
254.gap:      -QxW -Qipo -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 8/2002:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 533 MHz