CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.2 GHz, Pentium 4 processor)

SPECfp2000 = 808

SPECfp_base2000 = 798

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	158	1013	157	1020
171.swim	3100	235	1320	232	1337
172.mgrid	1800	237	761	235	767
173.applu	2100	255	824	249	843
177.mesa	1400	167	838	167	841
178.galgel	2900	258	1124	256	1134
179.art	2600	494	526	482	539
183.equake	1300	140	930	134	971
187.facerec	1900	188	1008	188	1013
188.ammp	2200	417	527	414	531
189.lucas	2000	182	1096	182	1097
191.fma3d	2100	265	792	265	793
200.sixtrack	1100	276	399	267	412
301.apsi	2600	433	600	433	601

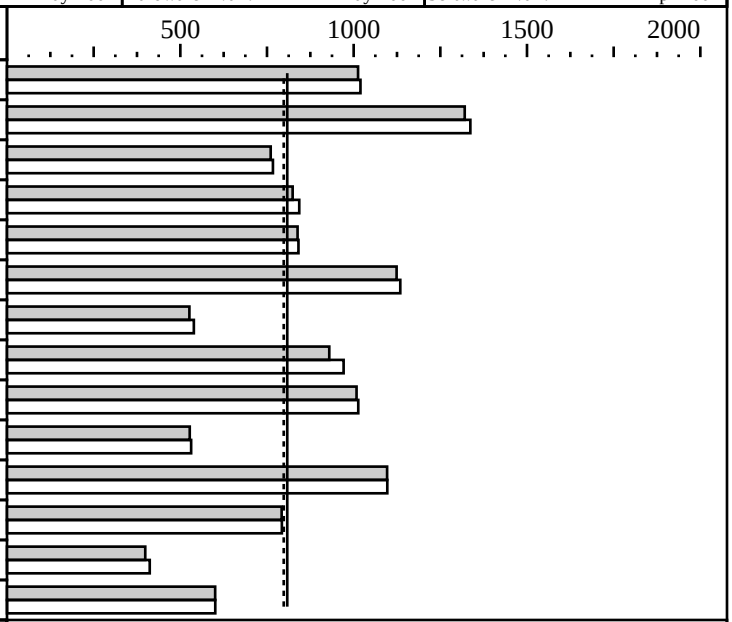

Hardware

CPU:	Pentium 4 processor (2.2 GHz, 400 MHz bus)
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800-40 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning:  -Qipo -QxW -O3 +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -Qipo -QxW  -O3 +FDO
171.swim:     -Qipo -QxW  -O3 +FDO
172.mgrid:    -Qipo -QaxW -O3 +FDO
173.applu:    -Qipo -QxW  -O3 -Qscalar_rep- -Qauto +FDO
177.mesa:     -Qipo -Oa -QxW -O3 +FDO
178.galgel:   -Qipo -QxW  -O3 +FDO
179.art:      -Qipo -QxW  -O3 -Oa +FDO
183.equake:   -Qipo -QxW  -Oa -Qrcd +FDO
187.facerec:  -Qipo -QxW  -O3 +FDO
188.ammp:     -Qipo -QxW  -O3 -Oa +FDO
189.lucas:    -Qipo -QxW  -O3 +FDO
191.fma3d:    -Qipo -QxW  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.2 GHz, Pentium 4 processor)

SPECfp2000 = 808

SPECfp_base2000 = 798

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Notes/Tuning Information (Continued)

```
200.sixtrack: -Qipo -QxW  +FDO
301.apsi:     -Qipo -QxW  -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 8/2002:
http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 400 MHz
```