CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.0 GHz, Pentium 4 processor)

SPECint2000 = 684

SPECint_base2000 = 681

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	175	801	174	803
175.vpr	1400	352	398	352	398
176.gcc	1100	143	770	143	770
181.mcf	1800	341	527	341	528
186.crafty	1000	137	728	139	720
197.parser	1800	290	620	291	619
252.eon	1300	152	853	142	918
253.perlbmk	1800	204	881	205	879
254.gap	1100	118	934	118	934
255.vortex	1900	174	1095	175	1086
256.bzip2	1500	279	538	277	541
300.twolf	3000	729	412	729	411

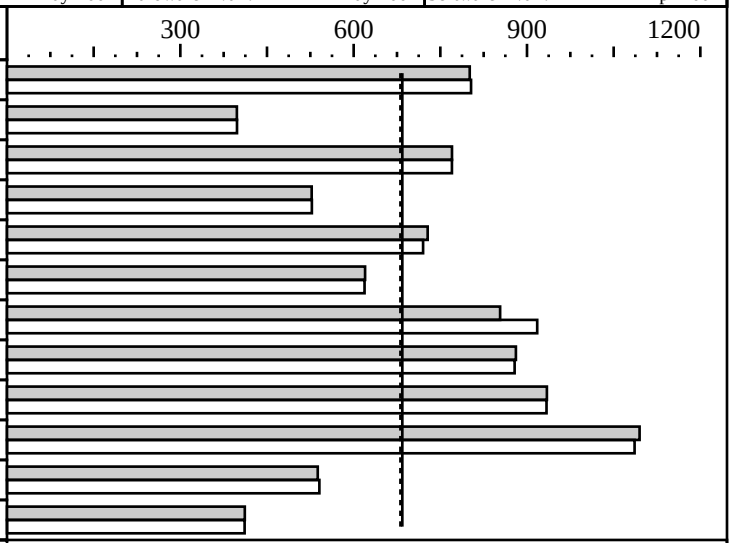

Hardware

CPU:	Pentium 4 processor (2.0 GHz, 400 MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800-40 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -QxW -Qipo -O3 +FDO
Base tuning for C++ programs: -QxW -Qipo -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxW -Qipo -Oa -O3 +FDO
175.vpr:      -QxW -Qwp_ipo -O3 +FDO
176.gcc:      -QxW -Qipo -O3 +FDO
181.mcf:      -QxW -Qipo -O3 +FDO
186.crafty:   -QxW -Qipo -Oa -O3 +FDO
197.parser:   -QxW -Qipo -O3 +FDO
252.eon:      -QxW -Qipo -O3 +FDO
253.perlbmk:  -QxW -Qipo -O3 +FDO
254.gap:      -QxW -Qipo -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 8/2002:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 400 MHz
```