CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.0 GHz, Pentium 4 processor)

SPECfp2000 = 745

SPECfp_base2000 = 735

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	171	936	171	938
171.swim	3100	242	1282	238	1301
172.mgrid	1800	252	715	250	719
173.applu	2100	267	788	260	806
177.mesa	1400	187	747	186	753
178.galgel	2900	286	1013	280	1035
179.art	2600	492	529	480	542
183.equake	1300	146	892	139	935
187.facerec	1900	222	857	220	862
188.ammp	2200	510	431	507	434
189.lucas	2000	193	1038	193	1038
191.fma3d	2100	287	733	286	734
200.sixtrack	1100	302	364	293	375
301.apsi	2600	476	546	475	547

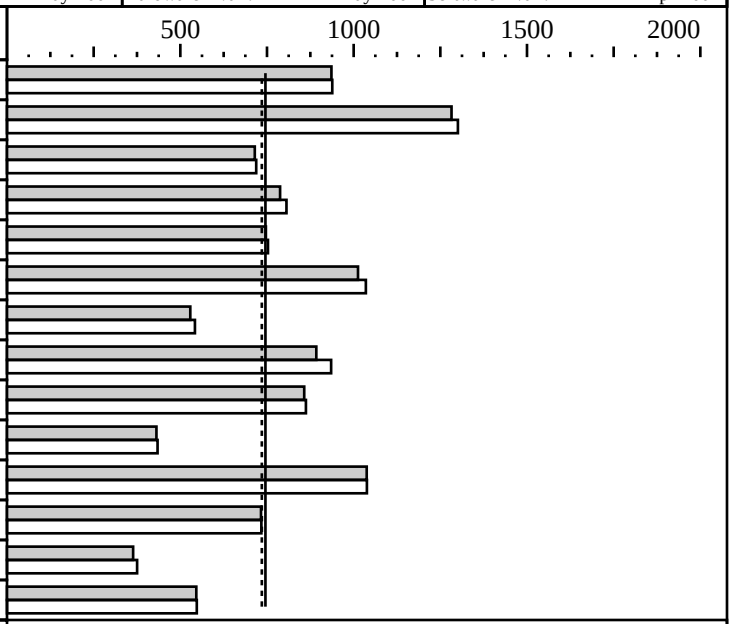

Hardware

CPU:	Pentium 4 processor (2.0 GHz, 400 MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800-40 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning:  -Qipo -QxW -O3 +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -Qipo -QxW  -O3 +FDO
171.swim:     -Qipo -QxW  -O3 +FDO
172.mgrid:    -Qipo -QaxW -O3 +FDO
173.applu:    -Qipo -QxW  -O3 -Qscalar_rep- -Qauto +FDO
177.mesa:     -Qipo -Oa -QxW -O3 +FDO
178.galgel:   -Qipo -QxW  -O3 +FDO
179.art:      -Qipo -QxW  -O3 -Oa +FDO
183.equake:   -Qipo -QxW  -Oa -Qrcd +FDO
187.facerec:  -Qipo -QxW  -O3 +FDO
188.ammp:     -Qipo -QxW  -O3 -Oa +FDO
189.lucas:    -Qipo -QxW  -O3 +FDO
191.fma3d:    -Qipo -QxW  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
200.sixtrack: -Qipo -QxW  +FDO
301.apsi:     -Qipo -QxW  -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 8/2002:
http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 400 MHz
```