CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMVR motherboard (2.26 GHz, Pentium 4 processor)

SPECint2000 = 888

SPECint_base2000 = 884

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2002 | Hardware Avail: Oct-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	148	943	148	945
175.vpr	1400	245	572	245	572
176.gcc	1100	102	1074	102	1074
181.mcf	1800	251	716	252	715
186.crafty	1000	114	880	115	872
197.parser	1800	214	841	214	840
252.eon	1300	135	966	125	1037
253.perlbmk	1800	174	1037	174	1037
254.gap	1100	96.5	1140	96.5	1140
255.vortex	1900	128	1481	129	1473
256.bzip2	1500	211	712	210	715
300.twolf	3000	489	614	488	615

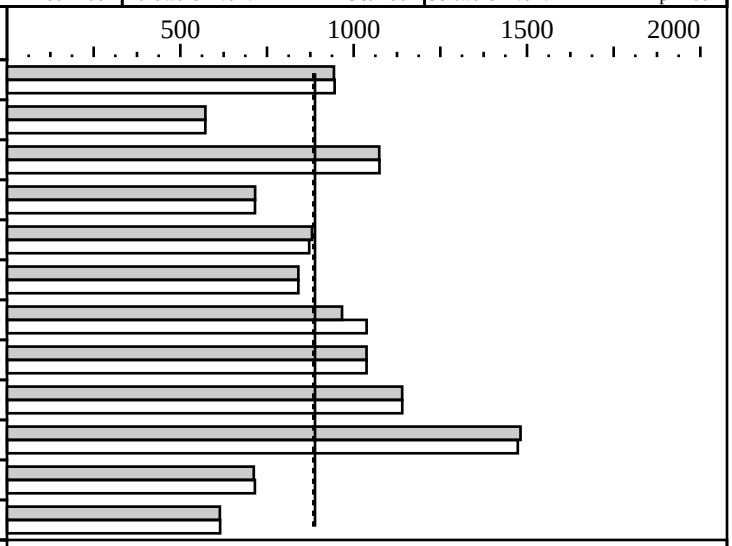

Hardware

CPU:	Pentium 4 processor (2.26 GHz, 533 MHz bus)
CPU MHz:	2266
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC1066-32 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -QxW -Qipo -O3 +FDO
Base tuning for C++ programs: -QxW -Qipo -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxW -Qipo -Oa -O3 +FDO
175.vpr:      -QxW -Qwp_ipo -O3 +FDO
176.gcc:      -QxW -Qipo -O3 +FDO
181.mcf:      -QxW -Qipo -O3 +FDO
186.crafty:   -QxW -Qipo -Oa -O3 +FDO
197.parser:   -QxW -Qipo -O3 +FDO
252.eon:      -QxW -Qipo -O3 +FDO
253.perlbmk:  -QxW -Qipo -O3 +FDO
254.gap:      -QxW -Qipo -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 10/2002:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 533 MHz