CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMVR motherboard (2.53 GHz, Pentium 4 processor)

SPECfp2000 = 990

SPECfp_base2000 = 978

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2002 | Hardware Avail: Oct-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	132	1208	132	1212
171.swim	3100	180	1724	178	1744
172.mgrid	1800	192	936	192	939
173.applu	2100	205	1027	200	1048
177.mesa	1400	144	971	144	973
178.galgel	2900	208	1396	206	1408
179.art	2600	373	696	367	708
183.equake	1300	112	1158	107	1220
187.facerec	1900	159	1196	158	1201
188.ammp	2200	343	642	340	647
189.lucas	2000	147	1362	147	1362
191.fma3d	2100	220	953	220	954
200.sixtrack	1100	239	460	232	475
301.apsi	2600	355	733	355	732

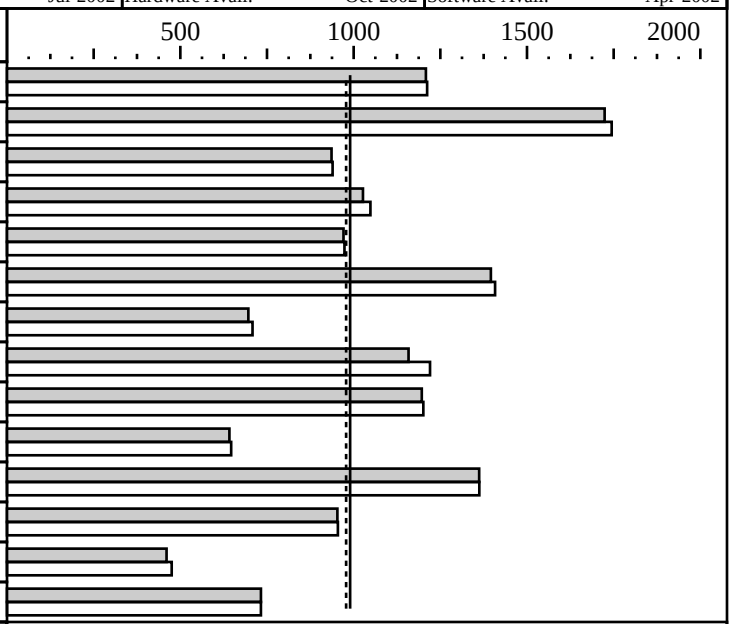

Hardware

CPU:	Pentium 4 processor (2.53 GHz, 533 MHz bus)
CPU MHz:	2533
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC1066-32 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning:  -Qipo -QxW -O3 +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -Qipo -QxW  -O3 +FDO
171.swim:     -Qipo -QxW  -O3 +FDO
172.mgrid:    -Qipo -QaxW -O3 +FDO
173.applu:    -Qipo -QxW  -O3 -Qscalar_rep- -Qauto +FDO
177.mesa:     -Qipo -Oa -QxW -O3 +FDO
178.galgel:   -Qipo -QxW  -O3 +FDO
179.art:      -Qipo -QxW  -O3 -Oa +FDO
183.equake:   -Qipo -QxW  -Oa -Qrcd +FDO
187.facerec:  -Qipo -QxW  -O3 +FDO
188.ammp:     -Qipo -QxW  -O3 -Oa +FDO
189.lucas:    -Qipo -QxW  -O3 +FDO
191.fma3d:    -Qipo -QxW  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
200.sixtrack: -Qipo -QxW  +FDO
301.apsi:     -Qipo -QxW  -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 10/2002:
http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 533 MHz
```