CINT2000 Result

Hewlett-Packard Company
hp AlphaServer GS80 68/1224

SPECint_rate2000 = 76.4
SPECint_rate_base2000 = 70.5

SPEC license #: 2	Tested by: HPQ - NH	Test date: Jul-2002	Hardware Avail: Aug-2002	Software Avail: Dec-2002

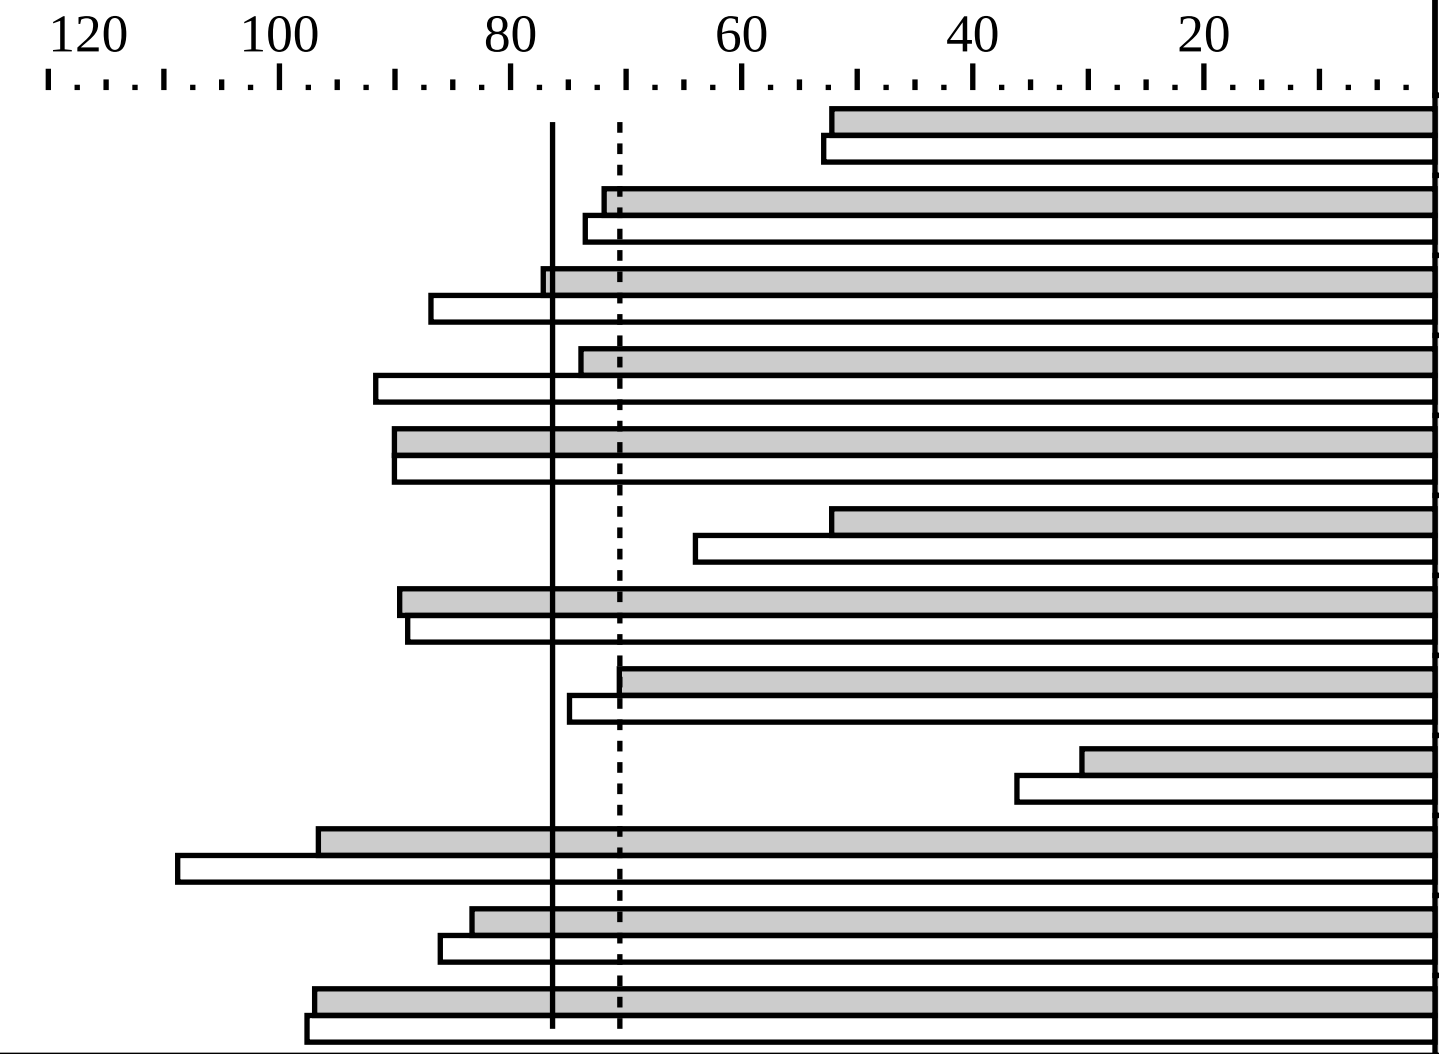

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	249	52.2	8	246	52.9
175.vpr	8	181	71.9	8	177	73.5
176.gcc	8	132	77.2	8	117	86.9
181.mcf	8	226	73.9	8	182	91.7
186.crafty	8	103	90.0	8	103	90.0
197.parser	8	320	52.2	8	261	64.0
252.eon	8	135	89.6	8	136	88.9
253.perlbmk	8	237	70.6	8	223	74.9
254.gap	8	334	30.6	8	282	36.2
255.vortex	8	182	96.6	8	162	109
256.bzip2	8	167	83.3	8	162	86.1
300.twolf	8	287	97.0	8	285	97.6

Hardware

CPU:	Alpha 21264C
CPU MHz:	1224
FPU:	Integrated
CPU(s) enabled:	8 cores, 8 chips, 1 core/chip
CPU(s) orderable:	1 to 8
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	16MB off chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	32GB
Disk Subsystem:	18GB Hard Drive
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B
Compiler:	Compaq C V6.4-215-46B7O Program Analysis Tools V2.0 Spike V5.2 DTK (1.471.2.2 46B5P) Compaq C++ V6.3-010-46B2F
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev6 -fast +CFB ONESTEP
         C++: cxx -arch ev6 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev6 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev6 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use       -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 16
        vm_swap_eager = 0

proc:
        max_per_proc_address_space = 0x40000000000
        max_per_proc_data_size = 0x40000000000
```

CINT2000 Result

Hewlett-Packard Company
hp AlphaServer GS80 68/1224

SPECint_rate2000 = 76.4
SPECint_rate_base2000 = 70.5

SPEC license #: 2	Tested by: HPQ - NH	Test date: Jul-2002	Hardware Avail: Aug-2002	Software Avail: Dec-2002

Notes/Tuning Information (Continued)

```
        max_per_proc_stack_size = 0x40000000000
        max_proc_per_user = 2048
        max_threads_per_user = 0
        maxusers = 16384
        per_proc_address_space = 0x40000000000
        per_proc_data_size = 0x40000000000
        per_proc_stack_size = 0x40000000000

submit = runon <cpu no> $command
```