CINT2000 Result

Hewlett-Packard Company
hp AlphaServer GS160 68/1224

SPECint2000 = 833

SPECint_base2000 = 767

SPEC license #: 2	Tested by: HPQ - NH	Test date: Jul-2002	Hardware Avail: Aug-2002	Software Avail: Dec-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	249	562	246	568
175.vpr	1400	178	785	173	808
176.gcc	1100	130	846	119	925
181.mcf	1800	219	823	173	1038
186.crafty	1000	99.6	1004	99.6	1004
197.parser	1800	322	558	262	688
252.eon	1300	134	969	135	962
253.perlbmk	1800	242	744	231	779
254.gap	1100	313	351	257	428
255.vortex	1900	181	1052	165	1151
256.bzip2	1500	173	866	157	954
300.twolf	3000	288	1040	287	1046

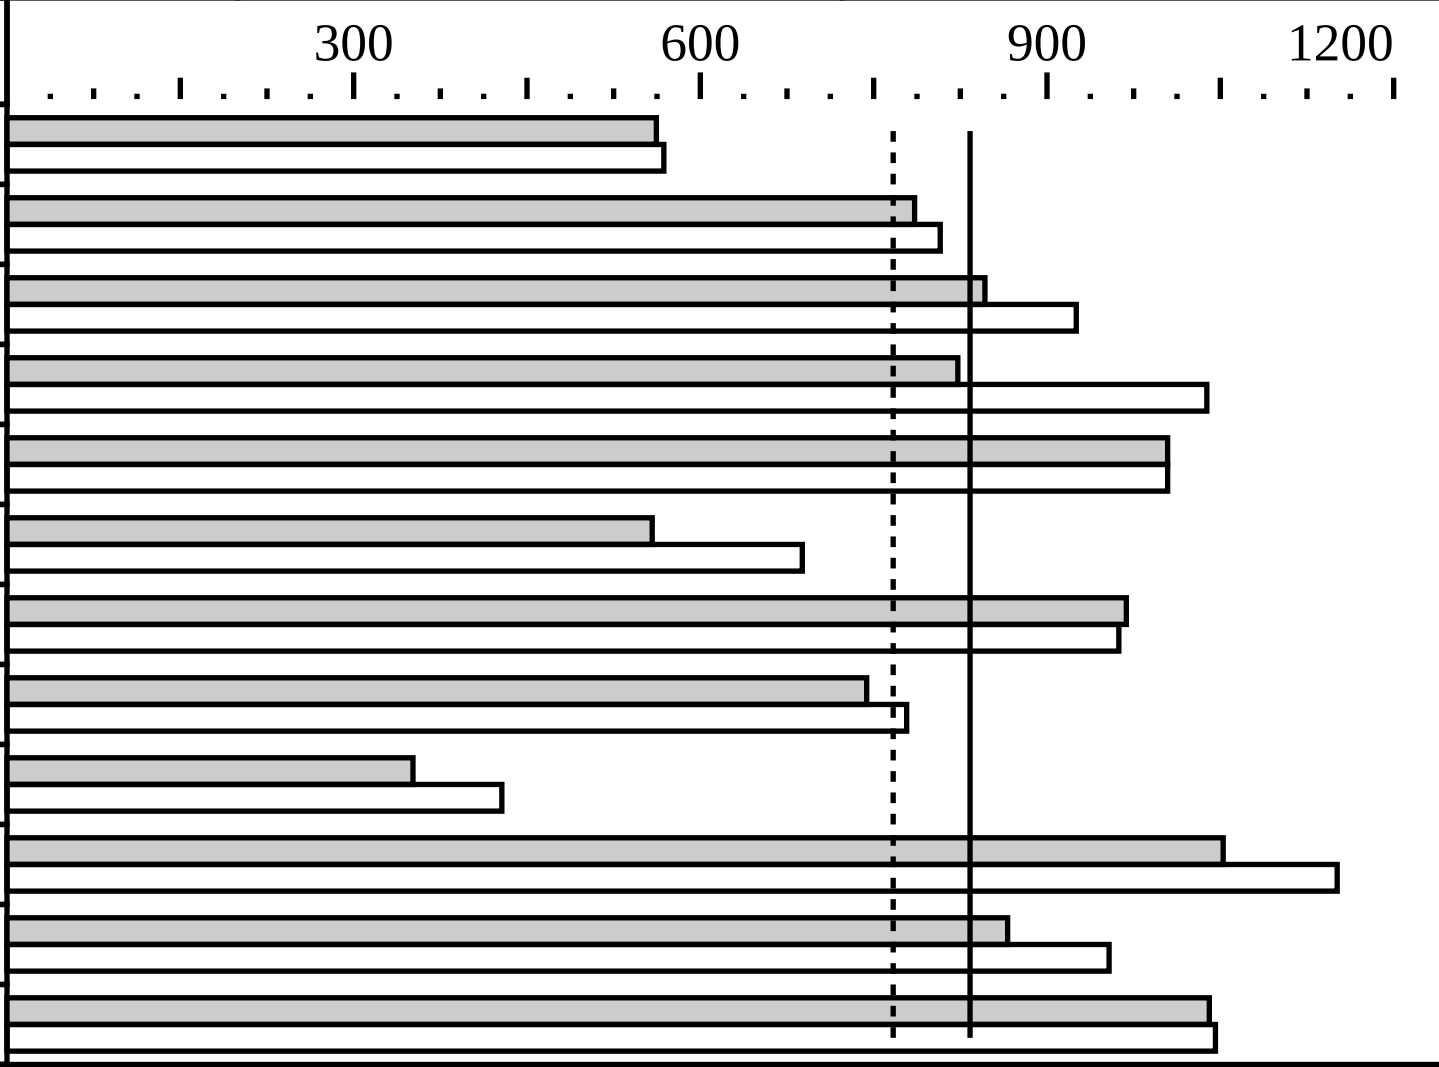

Hardware

CPU:	Alpha 21264C
CPU MHz:	1224
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 16
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	16MB off chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	9GB Hard Drive
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B
Compiler:	Compaq C V6.4-215-46B7O Program Analysis Tools V2.0 Spike V5.2 DTK (1.471.2.2 46B5P) Compaq C++ V6.3-010-46B2F
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev6 -fast +CFB ONESTEP
         C++: cxx -arch ev6 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev6 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev6 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Hewlett-Packard Company
hp AlphaServer GS160 68/1224

SPECint2000 = 833
SPECint_base2000 = 767

SPEC license #: 2	Tested by: HPQ - NH	Test date: Jul-2002	Hardware Avail: Aug-2002	Software Avail: Dec-2002

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use       -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 16
        vm_swap_eager = 0

proc:
        max_per_proc_address_space = 0x40000000000
        max_per_proc_data_size = 0x40000000000
```

CINT2000 Result

Hewlett-Packard Company
hp AlphaServer GS160 68/1224

SPECint2000 = 833
SPECint_base2000 = 767

SPEC license #: 2	Tested by: HPQ - NH	Test date: Jul-2002	Hardware Avail: Aug-2002	Software Avail: Dec-2002

Notes/Tuning Information (Continued)

```
            max_per_proc_stack_size = 0x40000000000
            max_proc_per_user = 2048
            max_threads_per_user = 0
            maxusers = 16384
            per_proc_address_space = 0x40000000000
            per_proc_data_size = 0x40000000000
            per_proc_stack_size = 0x40000000000

    System is single QBB (4-cpu) with only 1 cpu enabled at console
```