CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer pSeries 655 Model 651 (1300 MHz, 4 CPU)

SPECint_rate2000 = 38.3

SPECint_rate_base2000 = 37.1

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Oct-2002 | Hardware Avail: Dec-2002 | Software Avail: Dec-2002

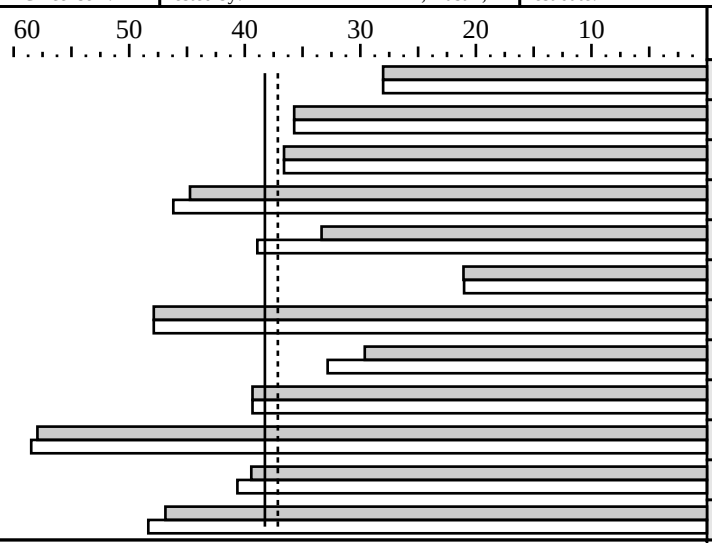

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	232	28.0	4	232	28.0
175.vpr	4	182	35.7	4	182	35.7
176.gcc	4	139	36.6	4	139	36.6
181.mcf	4	187	44.7	4	181	46.2
186.crafty	4	139	33.4	4	119	38.9
197.parser	4	396	21.1	4	397	21.0
252.eon	4	126	47.9	4	126	47.9
253.perlbmk	4	282	29.6	4	254	32.8
254.gap	4	130	39.3	4	130	39.3
255.vortex	4	152	57.9	4	151	58.5
256.bzip2	4	176	39.4	4	171	40.6
300.twolf	4	297	46.9	4	288	48.3

Hardware

CPU:	POWER4
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip, 4 chips/MCM
CPU(s) orderable:	1 (order by # MCM)
Parallel:	No
Primary Cache:	64KBI+32KBD (on chip) per core
Secondary Cache:	1440KB unified (on chip) per chip
L3 Cache:	128MB unified (off-chip) per MCM, 1 MCM in SUT (4 chips per MCM)
Other Cache:	None
Memory:	16 GB
Disk Subsystem:	1x18.2 GB SCSI
Other Hardware:	None

Software

Operating System:	AIX 5L V5.1
Compiler:	IBM C for AIX, Version 6.0 IBM VisualAge C++ Professional for AIX, Version 6.0
File System:	AIX/JFS
System State:	Multi-User

Notes/Tuning Information

```
Integer Portability Flags:
  gcc:     -ma -DHOST_WORDS_BIG_ENDIAN
  crafty:  -DAIX
  eon:     -DNEED_EXPLICIT_SPECIALIZATION
            -I. -DNDEBUG
  perlbmk: -DSPEC_CPU2000_AIX
  gap:     -DSYS_IS_BSD -DSYS_STRING_H -DSYS_HAS_TIME_PROTO
           -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
  twolf:   -DHAVE_SIGNED_CHAR

Base Optimization Flags:
  C:
  -qpdf1/pdf2
  -O5 -blpdata -qalign=natural
  C++:
  -qpdf1/pdf2
  -O5 -lhmu -qalign=natural

Integer Peak Optimization Flags
164.gzip
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    BASEPEAK = 1
    "CC      = /usr/vac/bin/xlc"
  175.vpr
    BASEPEAK = 1
  176.gcc
    BASEPEAK = 1
  181.mcf
    fdpr -v -R3
    -O5 -blpdata
  186.crafty
    -qpdf1/pdf2
    fdpr -v -R3
    -O3 -q64
  197.parser
    -O5 -blpdata
  252.eon
    BASEPEAK = 1
  253.perlbmk
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  254.gap
    BASEPEAK = 1
  255.vortex
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  256.bzip2
    -qpdf1/pdf2
    -O5 -blpdata -qarch=pwr3 -qtune=pwr3
  300.twolf
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural -blpdata
    "CC      = /usr/vac/bin/xlc"

    MCM: Acronym for "Multi-Chip Module"
    SUT: Acronym for "System Under Test"

    fpdr: Feedback directed program restructuring tool
    /usr/spec2000 filesystem mounted with no JFS log file I/O.
    APAR IY 35692 was applied to AIX to enable new hardware support.
    ulimits set to unlimited.
    C: IBM VAC++ invoked as cc except where noted as xlc
    C++: IBM VAC++ invoked as xlC
    Large page mode and memory affinity were set as follows:
      vmtune64 -g 16777216 -L 128 -y1
      chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
      bosboot -a
      shutdown -r
```