CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 15K

SPECfp_rate2000 = 492

SPECfp_rate_base2000 = 414

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Mar-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

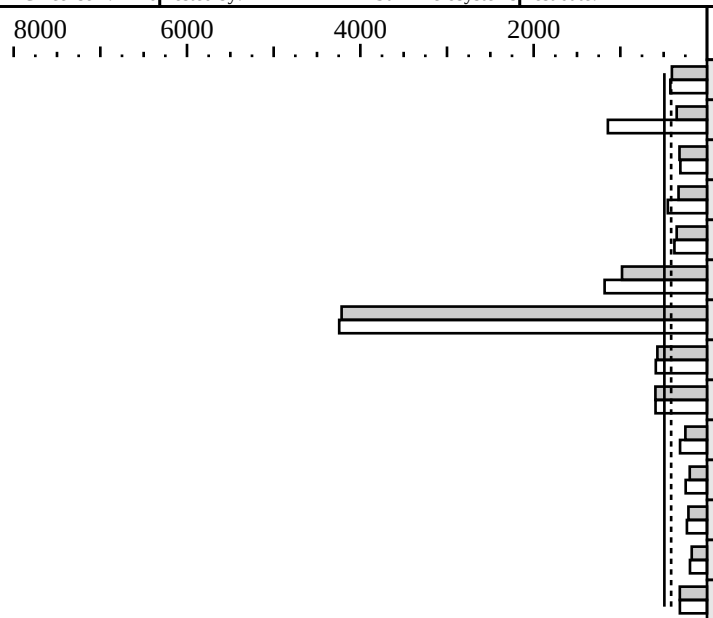

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	48	220	405	48	211	423
171.swim	48	494	350	48	151	1144
172.mgrid	48	316	317	48	326	307
173.applu	48	356	328	48	259	452
177.mesa	48	223	350	48	207	376
178.galgel	48	165	981	48	137	1181
179.art	48	34.3	4216	48	34.1	4244
183.equake	48	126	572	48	123	591
187.facerec	48	178	595	48	178	594
188.ammp	48	491	249	48	394	311
189.lucas	48	559	199	48	453	246
191.fma3d	48	546	214	48	505	232
200.sixtrack	48	347	176	48	312	196
301.apsi	48	462	314	48	463	313

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	48 cores, 48 chips, 1 core/chip
CPU(s) orderable:	4-106
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	384GB 16-way interleaved
Disk Subsystem:	1 x 36GB (System Disk) Sun StorEdge T3, 9 x 18GB striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
              -Qoption iropt -Atile:skewp,-Ainline:cs=700
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                (no feedback)
 172.mgrid:     -fast -xipo=2
 173.applu:     -fast -xipo=2
                -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
                -Qoption iropt -Aujam:inner=g
 177.mesa:      -fast -xipo=2 -xalias_level=strong -xrestrict
                -Wc,-Qms_pipe+unoovf
 178.galgel:    -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
                RM_SOURCES=lapak.f90
 179.art:       -fast -xipo=2 -xalias_level=std
                -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:    -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec:   -fast -xipo=2
 188.ammp:      -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:     -fast -xipo=2 -xprefetch_level=3 -Qoption iropt -Apf:pdl=1
                -Qoption f90comp -array_pad_rows,1977
 191.fma3d:     -fast -xipo=2 -stackvar -xprefetch_level=3
                -Qoption iropt -Apf:pdl=1
 200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
 301.apsi:      -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind
```