CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 15K

SPECint_rate2000 = 478

SPECint_rate_base2000 = 430

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Mar-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

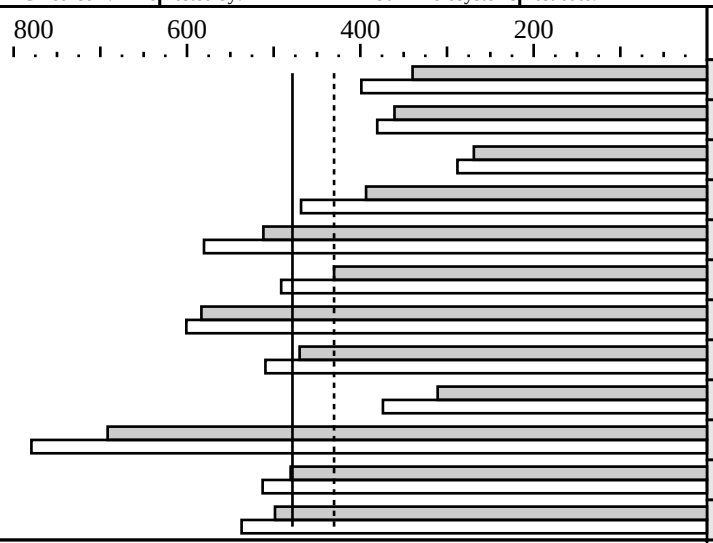

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	72	344	340	72	293	399
175.vpr	72	324	361	72	307	380
176.gcc	72	342	269	72	319	288
181.mcf	72	382	393	72	321	468
186.crafty	72	163	512	72	144	580
197.parser	72	349	430	72	306	491
252.eon	72	186	583	72	181	601
253.perlbmk	72	320	470	72	295	509
254.gap	72	296	311	72	246	374
255.vortex	72	229	692	72	204	780
256.bzip2	72	261	480	72	244	513
300.twolf	72	503	498	72	467	537

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	72 cores, 72 chips, 1 core/chip
CPU(s) orderable:	4-106
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	576GB 16-way interleaved
Disk Subsystem:	1 x 36GB (System Disk) Sun StorEdge T3, 9 x 18GB striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                Feedback adds -xlinkopt in PASS2
 197.parser:    -fast -xipo=2 -xalias_level=strong
                -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:       -fast -xipo=2 -xalias_level=compatible -noex
                -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk:   -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
                -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
                -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:       -fast -xipo=2 -xalias_level=strong -xvector
                -xprefetch_level=3 -W2,-Abcopy
 255.vortex:    -fast -xrestrict -xipo=2
                -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
                -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
                -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:     -fast -xipo -xalias_level=strong -xrestrict
                -Wc,-Qeps:enabled=1
 300.twolf:     -fast -xalias_level=strong -xsafe=mem -xipo=2
                -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:       -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:    -DSUN
 252.eon:       -library=iostream
 253.perlbmk:   -DSPEC_CPU2000_SOLARIS
 254.gap:       -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
                -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind
```