CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 2000 (1.2GHz)

SPECfp_rate2000 = 13.0

SPECfp_rate_base2000 = 11.1

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2003 | Hardware Avail: Apr-2003 | Software Avail: May-2003

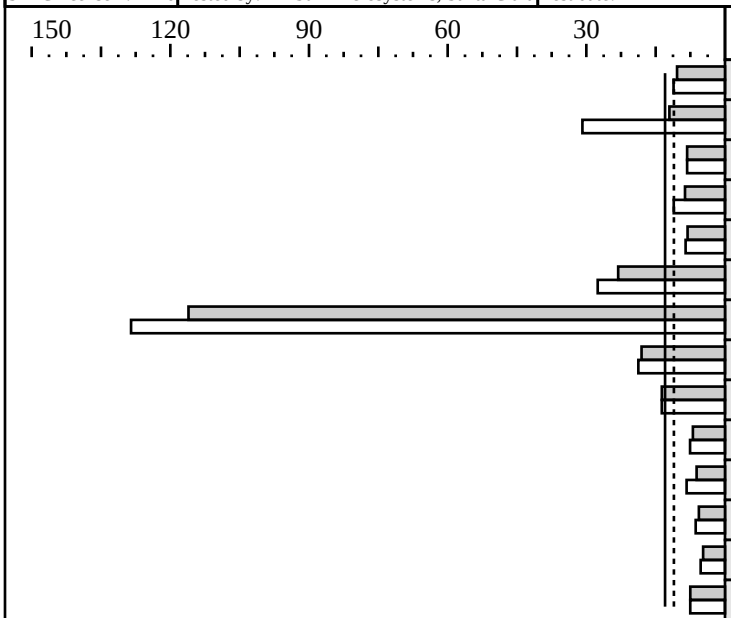

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	179	10.4	1	167	11.1
171.swim	1	299	12.0	1	117	30.8
172.mgrid	1	255	8.19	1	255	8.19
173.applu	1	282	8.65	1	220	11.1
177.mesa	1	201	8.10	1	191	8.52
178.galgel	1	146	23.1	1	122	27.5
179.art	1	26.0	116	1	23.5	128
183.equake	1	83.5	18.1	1	80.4	18.7
187.facerec	1	161	13.7	1	161	13.7
188.ammp	1	367	6.95	1	338	7.56
189.lucas	1	378	6.14	1	279	8.31
191.fma3d	1	431	5.65	1	384	6.34
200.sixtrack	1	270	4.73	1	242	5.26
301.apsi	1	402	7.51	1	401	7.52

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	2GB 4-way interleaved
Disk Subsystem:	1 x 73GB 10K RPM FC-AL Disk, Sun Option X6805A
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/09) Sun Performance Library 8 (pre-FCS build 3/09)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
              -Qoption iropt -Atile:skewp,-Ainline:cs=700
              (no feedback)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 172.mgrid:   -fast -xipo=2
 173.applu:   -fast -xipo=2
              -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
              -Qoption iropt -Aujam:inner=g
 177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qms_pipe+unoovf
 178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
              RM_SOURCES=lapak.f90
 179.art:     -fast -xipo=2 -xalias_level=std
              -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec: -fast -xipo=2
 188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:   -fast  -xprefetch_level=3 -Qoption iropt -Apf:pdl=1
              -Qoption f90comp -array_pad_rows,1977
 191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
              -Qoption iropt -Apf:pdl=1
 200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
 301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=512K
  MPSSSTACK=512K
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
   autoup=900
   tune_t_fsflushr=1

System Settings:
    2nd cpu physically removed from system
```