CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Einux
A4800

SPECfp_rate2000 = 40.7

SPECfp_rate_base2000 = 37.3

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Apr-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

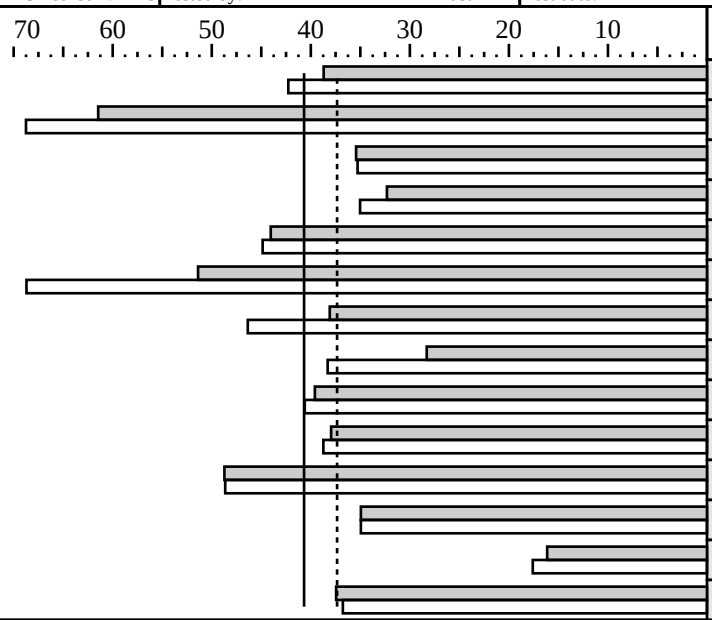

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	192	38.7	4	176	42.3
171.swim	4	234	61.5	4	209	68.8
172.mgrid	4	236	35.4	4	237	35.3
173.applu	4	302	32.3	4	278	35.0
177.mesa	4	147	44.0	4	145	44.9
178.galgel	4	262	51.4	4	196	68.7
179.art	4	317	38.1	4	260	46.4
183.equake	4	213	28.3	4	158	38.3
187.facerec	4	223	39.6	4	217	40.6
188.ammp	4	269	37.9	4	264	38.7
189.lucas	4	190	48.7	4	191	48.6
191.fma3d	4	279	34.9	4	279	34.9
200.sixtrack	4	316	16.1	4	290	17.6
301.apsi	4	322	37.4	4	328	36.8

Hardware

CPU:	AMD Opteron 840, 1.4 GHz
CPU MHz:	1400
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x512MB PC2700 DDR ECC Registered SDRAM CL2.5
Disk Subsystem:	IDE 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition
Compiler:	Intel C/C++ 7.0 build 20021212Z and Intel Fortran 7.0 build 20021212Z Compaq Visual Fortran Compiler Version 6.6 (Update B) Microsoft Visual Studio .NET (libraries)7.0.9466 MicroQuill Smartheap Library 6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
icl and ifl are the Intel C/C++ and Fortran compilers
f90 is the Compaq Fortran compiler
shlW32M6.lib is the SmartHeap library V6.0 from MicroQuill www.microquill.com
Portability:
  178.galgel: -FI -Fe$@ -link -stack:32000000
Baseline: C       icl +FD0 -O3 -QxW  -Qipo
Baseline: Fortran ifl +FDO -O3 -QxW  -Qipo
Peak tuning:
  168.wupwise:    ifl +FD0     -QxK  -Qipo -Ow
  171.swim:       f90 -Optimize:5 -alignment:dcommons -alignment:records
                      -alignment:sequence -architecture:k7
                      -assume:noaccuracy_sensitive -math_library:fast -tune:k7
  172.mgrid:      ifl +FD0 -O3 -QaxW -Qipo -Oa -Qprefetch-
  173.applu:      ifl +FD0 -O3 -QxK  -Qipo     -Qscalar_rep-           -Zp8
  177.mesa:       icl +FD0 -O3 -QxW  -Qipo -Oa -Qscalar_rep-
  178.galgel:     f90 -Optimize:5 -fast
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Einux
A4800

SPECfp_rate2000 = 40.7
SPECfp_rate_base2000 = 37.3

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Apr-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

```
  179.art:        icl                -Qipo -Oa                -Qunroll4 -Zp4
  183.equake:     icl      -O3 -QxK  -Qipo -Oa shlW32M6.lib             -Zp4
  187.facerec:    ifl +FD0 -O3 -QaxW -Qipo     -Qscalar_rep- -Qunroll1
  188.ammp:       icl           -QxW        -Oa
  189.lucas:      ifl +FD0 -O3 -QxW  -Qipo     -Qprefetch-
  191.fma3d:      ifl basepeak=1
  200.sixtrack:   ifl                -Qipo -Oa                          -Zp4
  301.apsi:       f90 -Optimize:5 -fast
ONESTEP is used for all base and peak runs
```