CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Einux
A4800

SPECfp_rate2000 = 25.1

SPECfp_rate_base2000 = 23.0

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Apr-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

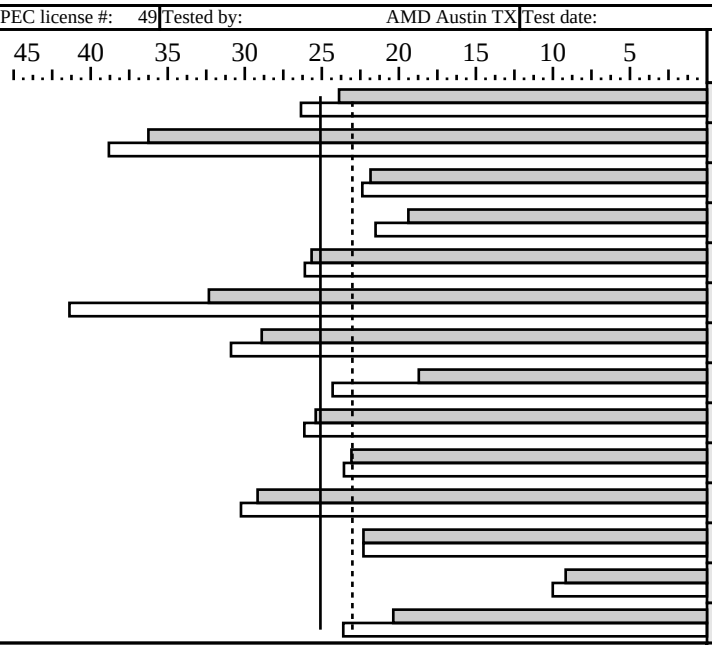

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	155	23.9	2	141	26.4
171.swim	2	198	36.3	2	185	38.8
172.mgrid	2	191	21.8	2	187	22.4
173.applu	2	251	19.4	2	226	21.5
177.mesa	2	127	25.7	2	124	26.1
178.galgel	2	208	32.3	2	163	41.4
179.art	2	209	28.9	2	195	30.9
183.equake	2	161	18.7	2	124	24.3
187.facerec	2	174	25.4	2	169	26.1
188.ammp	2	221	23.1	2	217	23.6
189.lucas	2	159	29.2	2	153	30.2
191.fma3d	2	219	22.3	2	219	22.3
200.sixtrack	2	278	9.17	2	255	10.0
301.apsi	2	296	20.4	2	256	23.6

Hardware

CPU:	AMD Opteron 242, 1.6 GHz
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x512MB PC2700 DDR ECC Registered SDRAM CL2.5
Disk Subsystem:	IDE 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition
Compiler:	Intel C/C++ 7.0 build 20021212Z and Intel Fortran 7.0 build 20021212Z Compaq Visual Fortran Compiler Version 6.6 (Update B) Microsoft Visual Studio .NET (libraries)7.0.9466 MicroQuill Smartheap Library 6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
icl and ifl are the Intel C/C++ and Fortran compilers
f90 is the Compaq Fortran compiler
shlW32M6.lib is the SmartHeap library V6.0 from MicroQuill www.microquill.com
Portability:
  178.galgel: -FI -Fe$@ -link -stack:32000000
Baseline: C       icl +FD0 -O3 -QxW  -Qipo
Baseline: Fortran ifl +FDO -O3 -QxW  -Qipo
Peak tuning:
  168.wupwise:    ifl +FD0     -QxK  -Qipo -Ow
  171.swim:       f90 -Optimize:5 -alignment:dcommons -alignment:records
                      -alignment:sequence -architecture:k7
                      -assume:noaccuracy_sensitive -math_library:fast -tune:k7
  172.mgrid:      ifl +FD0 -O3 -QaxW -Qipo -Oa -Qprefetch-
  173.applu:      ifl +FD0 -O3 -QxK  -Qipo     -Qscalar_rep-           -Zp8
  177.mesa:       icl +FD0 -O3 -QxW  -Qipo -Oa -Qscalar_rep-
  178.galgel:     f90 -Optimize:5 -fast
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Einux
A4800

SPECfp_rate2000 = 25.1
SPECfp_rate_base2000 = 23.0

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Apr-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

```
  179.art:        icl                -Qipo -Oa                -Qunroll4 -Zp4
  183.equake:     icl      -O3 -QxK  -Qipo -Oa shlW32M6.lib             -Zp4
  187.facerec:    ifl +FD0 -O3 -QaxW -Qipo     -Qscalar_rep- -Qunroll1
  188.ammp:       icl           -QxW        -Oa
  189.lucas:      ifl +FD0 -O3 -QxW  -Qipo     -Qprefetch-
  191.fma3d:      ifl basepeak=1
  200.sixtrack:   ifl                -Qipo -Oa                          -Zp4
  301.apsi:       f90 -Optimize:5 -fast
ONESTEP is used for all base and peak runs
```