CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 6800

SPECint_rate2000 = 180

SPECint_rate_base2000 = 158

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Apr-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

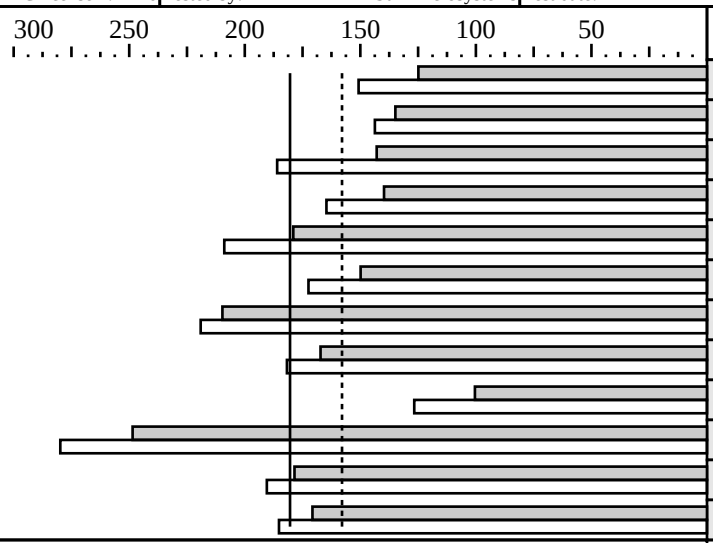

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	24	312	125	24	259	151
175.vpr	24	289	135	24	271	144
176.gcc	24	214	143	24	165	186
181.mcf	24	359	140	24	304	165
186.crafty	24	156	179	24	133	209
197.parser	24	334	150	24	291	172
252.eon	24	173	210	24	165	219
253.perlbmk	24	300	167	24	276	182
254.gap	24	305	100	24	242	127
255.vortex	24	213	249	24	189	280
256.bzip2	24	234	178	24	219	190
300.twolf	24	489	171	24	451	185

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	24 cores, 24 chips, 1 core/chip
CPU(s) orderable:	4-24
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	48GB 16-way interleaved
Disk Subsystem:	2 x 36GB 4 x (Sun StorEdge T3, 9x18GB raid5) 4-way striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 197.parser:  -fast -xipo=2 -xalias_level=strong
              -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:     -fast -xipo=2 -xalias_level=compatible -noex
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
              -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
              -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:     -fast -xipo=2 -xalias_level=strong -xvector
              -xprefetch_level=3 -W2,-Abcopy
 255.vortex:  -fast -xrestrict -xipo=2
              -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
              -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:   -fast -xipo -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1
 300.twolf:   -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The benchmark was run on the Sun StorEdge T3 disk resident
file system.
```