CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 4800

SPECfp_rate2000 = 86.3

SPECfp_rate_base2000 = 70.1

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Apr-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

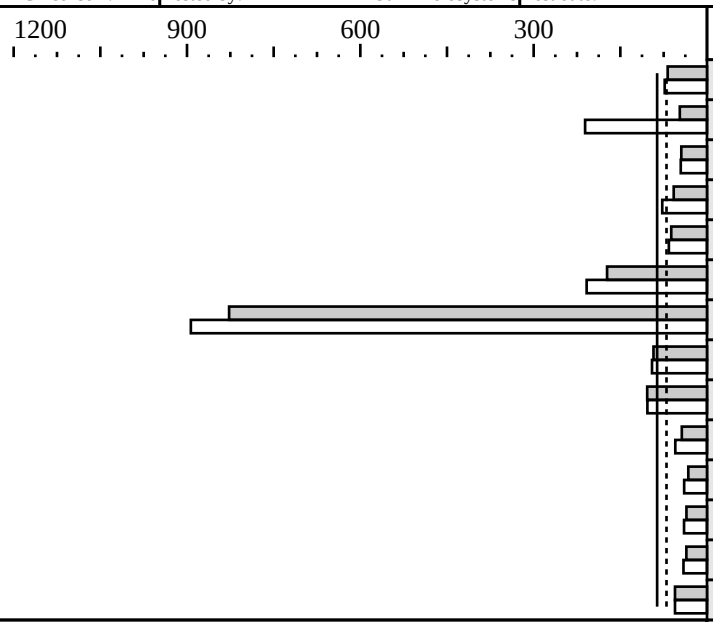

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	218	68.1	8	203	73.2
171.swim	8	611	47.1	8	136	211
172.mgrid	8	376	44.5	8	368	45.4
173.applu	8	338	57.6	8	252	77.5
177.mesa	8	210	61.9	8	197	66.0
178.galgel	8	156	173	8	129	208
179.art	8	29.2	827	8	27.0	893
183.equake	8	130	92.6	8	127	95.2
187.facerec	8	170	104	8	171	103
188.ammp	8	468	43.6	8	372	54.9
189.lucas	8	574	32.4	8	470	39.5
191.fma3d	8	548	35.6	8	490	39.7
200.sixtrack	8	286	35.7	8	251	40.7
301.apsi	8	436	55.4	8	436	55.4

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	8 cores, 8 chips, 1 core/chip
CPU(s) orderable:	4-12
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	16GB 16-way interleaved
Disk Subsystem:	2 x 36GB 4 x (Sun StorEdge T3, 9x18GB raid5) 4-way striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -Qoption iropt -Atile:skewp,-Ainline:cs=700
                (no feedback)
 172.mgrid:     -fast -xipo=2
 173.applu:     -fast -xipo=2
                -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
                -Qoption iropt -Aujam:inner=g
 177.mesa:      -fast -xipo=2 -xalias_level=strong -xrestrict
                -Wc,-Qms_pipe+unoovf
 178.galgel:    -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
                RM_SOURCES=lapak.f90
 179.art:       -fast -xipo=2 -xalias_level=std
                -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:    -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec:   -fast -xipo=2
 188.ammp:      -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:     -fast -xipo=2 -xprefetch_level=3 -Qoption iropt -Apf:pdl=1
                -Qoption f90comp -array_pad_rows,1977
 191.fma3d:     -fast -xipo=2 -stackvar -xprefetch_level=3
                -Qoption iropt -Apf:pdl=1
 200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
 301.apsi:      -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The benchmark was run on the Sun StorEdge T3 disk resident
file system.
```