CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer pSeries 655 (1700 MHz, 4 CPU)

SPECint_rate2000 = 49.8

SPECint_rate_base2000 = 48.4

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Apr-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

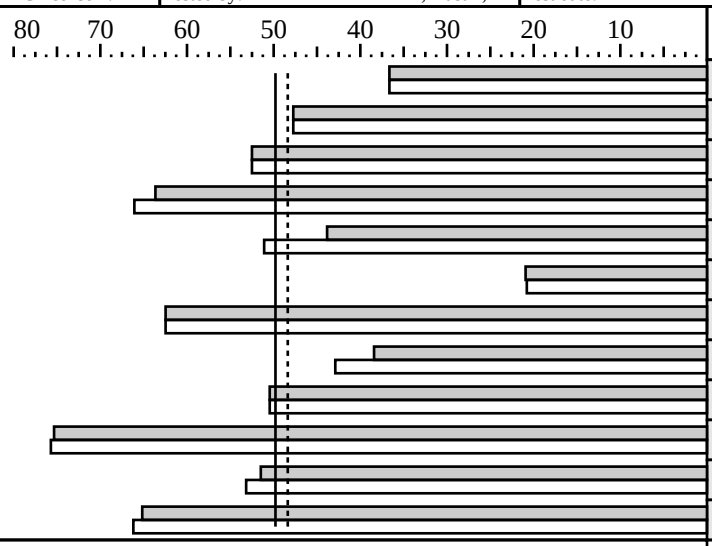

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	177	36.6	4	177	36.6
175.vpr	4	136	47.7	4	136	47.7
176.gcc	4	97.2	52.5	4	97.2	52.5
181.mcf	4	131	63.6	4	126	66.1
186.crafty	4	106	43.8	4	90.8	51.1
197.parser	4	399	20.9	4	402	20.8
252.eon	4	96.6	62.5	4	96.6	62.5
253.perlbmk	4	217	38.4	4	195	42.9
254.gap	4	101	50.5	4	101	50.5
255.vortex	4	117	75.3	4	116	75.7
256.bzip2	4	135	51.5	4	131	53.2
300.twolf	4	214	65.2	4	210	66.2

Hardware

CPU:	POWER4+
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip, 4 chips/MCM
CPU(s) orderable:	1 (order by # MCM)
Parallel:	No
Primary Cache:	64KBI+32KBD (on chip) per core
Secondary Cache:	1536KB unified (on chip) per chip
L3 Cache:	128MB unified (off-chip) per MCM, 1 MCM in SUT (4 chips per MCM)
Other Cache:	None
Memory:	16 GB
Disk Subsystem:	1x36GB SCSI, 10K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.2
Compiler:	IBM C for AIX, Version 6.0 IBM VisualAge C++ Professional for AIX, Version 6.0
File System:	AIX/JFS
System State:	Multi-User

Notes/Tuning Information

```
Integer Portability Flags:
  176.gcc:     -ma -DHOST_WORDS_BIG_ENDIAN
  186.crafty:  -DAIX
  252.eon:     -DNEED_EXPLICIT_SPECIALIZATION
               -I. -DNDEBUG
  253.perlbmk: -DSPEC_CPU2000_AIX
  254.gap:     -DSYS_IS_BSD -DSYS_STRING_H -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
  300.twolf:   -DHAVE_SIGNED_CHAR

Base Optimization Flags:
  C:
  -qpdf1/pdf2
  -O5 -blpdata -qalign=natural
  C++:
  -qpdf1/pdf2
  -O5 -lhmu -qalign=natural

Integer Peak Optimization Flags
164.gzip
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    BASEPEAK = 1
    "CC      = /usr/vac/bin/xlc"
  175.vpr
    BASEPEAK = 1
  176.gcc
    BASEPEAK = 1
  181.mcf
    fdpr -v -R3
    -O5 -blpdata
  186.crafty
    -qpdf1/pdf2
    fdpr -v -R3
    -O3 -q64
  197.parser
    -O5 -blpdata
  252.eon
    BASEPEAK = 1
  253.perlbmk
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  254.gap
    BASEPEAK = 1
  255.vortex
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  256.bzip2
    -qpdf1/pdf2
    -O5 -blpdata -qarch=pwr3 -qtune=pwr3
  300.twolf
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural -blpdata
    "CC      = /usr/vac/bin/xlc"

    MCM: Acronym for "Multi-Chip Module"
    SUT: Acronym for "System Under Test"

    fpdr: Feedback directed program restructuring tool
    /usr/spec2000 filesystem mounted with no JFS log file I/O.
    APAR IY 43549 was applied to AIX to enable new hardware support.
    ulimits set to unlimited.
    C: IBM VAC++ invoked as cc except where noted as xlc
    C++: IBM VAC++ invoked as xlC
    Large page mode and memory affinity were set as follows:
      vmo -r -o lgpg_regions=128 -o lgpg_size=16777216 -o memory_affinity=1
      chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
      shutdown -r
      export MEMORY_AFFINITY=MCM
```