CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER650 (1080MHz)

SPECint2000 = 737

SPECint_base2000 = 635

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: May-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	275	508	248	565
175.vpr	1400	251	558	220	637
176.gcc	1100	179	615	151	729
181.mcf	1800	301	597	203	886
186.crafty	1000	147	680	142	705
197.parser	1800	326	552	296	609
252.eon	1300	277	470	184	708
253.perlbmk	1800	254	710	252	715
254.gap	1100	188	585	184	599
255.vortex	1900	172	1107	128	1488
256.bzip2	1500	233	645	219	684
300.twolf	3000	380	789	360	834

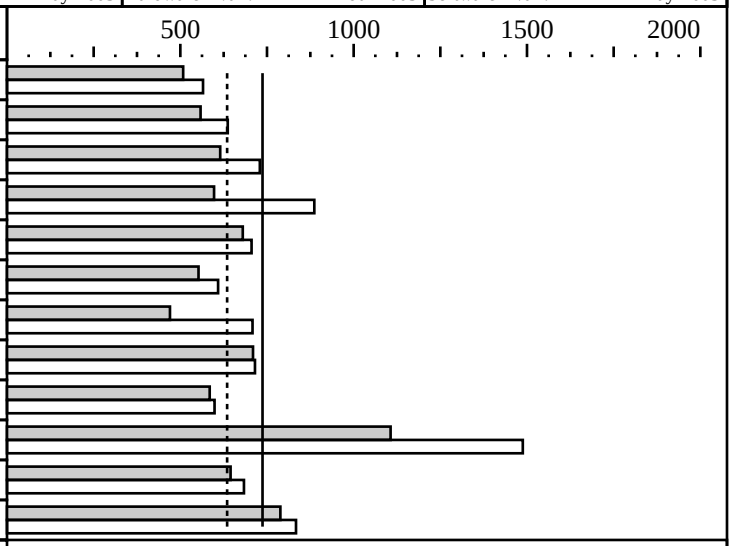

Hardware

CPU:	SPARC64 V
CPU MHz:	1080
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 8 (increments of 1)
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	2MB(I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	4096MB
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	None

Software

Operating System:	Solaris8 2/02 with current patches (see notes)
Compiler:	Fujitsu Parallelnavi 1.0.2 Sun ONE Studio 8 (EA2 version of Sun ONE Studio 8 used) Sun Performance Library 8
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
Baseline (except 252.eon, for Sun ONE Studio 8 EA2): -fast -xtarget=ultra3cu -xipo=2 ONESTEP=yes
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback
(252.eon, for Sun ONE Studio 8 EA2): -fast -xchip=ultra3cu -xarch=v8plusb -xipo=2 ONESTEP=yes
Peak
(for Sun ONE Studio 8 EA2)
   fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
   PASS1=-xprofile=collect:./feedback
   PASS2=-xprofile=use:./feedback
164.gzip: -xO5 -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb -xalias_level=std
    -xipo=2 -xprefetch -xprefetch_level=2 -W2,-whole,-Ainline ONESTEP=yes
175.vpr: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
    -xalias_level=std -xipo=2 -xsfpconst -xdepend -W2,-whole
   -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100 -lmopt -lm ONESTEP=yes
176.gcc: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
   -xipo=2 -xprefetch=latex:2.0 -W2,whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm ONESTEP=yes
181.mcf: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4 -xarch=v8plusb
    -xipo=2 -xdepend -Wc,-Qms_pipe-pref,-Qeps:enabled=1 -xprefetch_level=3
    -W2,Apf:llist=3:noinnerllist -lprism32 ONESTEP=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

186.crafty: -fast -xchip=ultra3cu -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo=2 -xalias_level=strong -xprefetch=latx:1.2
-W2,-Ashort_ldst ONESTEP=yes
197.parser: -fast -xchip=ultra3cu -xcache=128/64/2:2048/64/4 -xarch=v8plusb
-xipo=2 -xalias_level=strong -xdepend -xregs=syst
-Wc,-Qgsched-trace_late=1,-Qgsched-T6,-Qipa:valueprediction -lprism32 ONESTEP=yes
252.eon: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4 -xarch=v8plusb -xipo=2
-xregs=syst -xalias_level=compatible -noex -xunroll=3 -xprefetch=latx:0.8 -Qoption iropt -Mt2000
-Qoption cg -Qgsched-trace_late=1,-Qgsched-T4,-Qeps:enabled=1,-Qeps:ws=32
-lmopt ONESTEP=yes
253.perlbmk: -dn -xO5 -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plus -xipo=2 ONESTEP=yes
254.gap: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo=2 -xalias_level=strong -xvector -xprefetch_level=3
-W2,-whole,Abcopy -Wc,-Qgsched-trace_late=1,-Qgsched-T4 ONESTEP=yes
255.vortex: -fast -xchip=ultra2 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xrestrict -xipo=2 -xdepend -xprefetch=latx:2.4
-W2,-crit,Ainline:recursion=1:cs=500:irs=6000,-Aheap,-reroll=1,-Aunroll,-Ms15,-Mt300,-Mr6000
-Wc,Qeps:enabled=1,-Qeps:do_spec_load=1,-Qdepgraph-early_cross_call=1
-Wc,-Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm -lprism32 ONESTEP=yes
256.bzip2: -fast -xchip=ultra3 -xcache=128/64/2:2048/64/4
-xarch=v8plusb -xipo -xalias_level=strong -xdepend -xregs=syst
-xrestrict -xprefetch=latx:1.6 -W2,-Abopt -Wc,-Qiselect-funcalign=64,Qeps:enabled ONESTEP=yes
(for Parallelnavi 1.0.2)
300.twolf: -Kfast_GP=5,GREG,popt,cfunc,staticclump,use_rodata,xi=10,nounroll,largepage,bcopy,prefetch=4 -dy
PASS1=-Kpg
PASS2=-Kpu=$(EXEBASE).fbk
Portability:
176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon: -library=iostream
253.perlbmk: -DSPEC_CPU2000_SOLARIS
254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO
Note:
System Tunables: (for /etc/system)
consistent_coloring=1,
set shmsys:shminfo_shmmax=2147483648,set shmsys:shminfo_shmmni=256,
set shmsys:shminfo_shmseg=400,set shmsys:shminfo_shmmin=1
set tune_t_fsflushr = 86400
set autoup = 86400
(for /etc/opt/FJSVpnrm/lpg.conf)
TSS=1024M, SHMSEGSIZE=256M
Shell Environments:
LD_LIBRARY_PATH="/opt3/SUNWspro/prod/lib/v8plusb"
PRISM_HEAP=268435456
PRISM_MODE=2
ONESTEP=yes was set for all baseline and peak benchmarks.
Feedback directed optimization was used for all baseline and peak benchmarks except 252.eon(base).
Stack size set to unlimited via "ulimit -s unlimited"
Small configuration memory system mode used ("4cpu mode", enabled via front panel).
System board used with only one CPU present.
Sun ONE Studio 8 EA2 (Early Access 2), posted at URL http://access1.sun.com/s1sprod/
as updated through 27-Mar-2003, was used for this submission.
Sun ONE Studio 8 (final) will ship May-2003.
All patches for Solaris8 posted at
http://access1.sun.com/patch.public/cgi-bin/show_list.cgi/wrk/Sun_ONE_Studio_7_SPARC_SunOS_5.8

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

as of date 2003/04/21 were applied: 108434-11, 108435-11, 111697-04, 111721-03.