CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Altix 3000 (1300MHz, Itanium 2)

SPECint_rate2000 = 79.4

SPECint_rate_base2000 = 79.4

SPEC license #: 4 | Tested by: SGI | Test date: Jun-2003 | Hardware Avail: Jun-2003 | Software Avail: Jun-2003

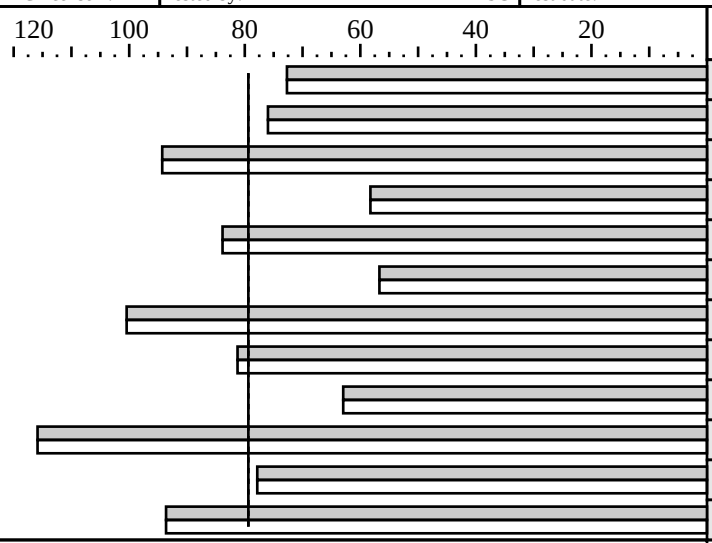

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	179	72.7	8	179	72.7
175.vpr	8	171	76.0	8	171	76.0
176.gcc	8	108	94.3	8	108	94.3
181.mcf	8	287	58.3	8	287	58.3
186.crafty	8	111	83.8	8	111	83.8
197.parser	8	295	56.7	8	295	56.7
252.eon	8	120	100	8	120	100
253.perlbmk	8	206	81.3	8	206	81.3
254.gap	8	162	63.0	8	162	63.0
255.vortex	8	152	116	8	152	116
256.bzip2	8	179	77.8	8	179	77.8
300.twolf	8	297	93.6	8	297	93.6

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	8 cores, 8 chips, 1 core/chip
CPU(s) orderable:	4-64
Parallel:	No
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	3.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	16 GB (16*512MB DIMMS per 4cpu module)
Disk Subsystem:	1 x 36 GB SCSI (Seagate Cheetah 15k rpm)
Other Hardware:	None

Software

Operating System:	SGI ProPack(TM) v2.2
Compiler:	Intel(R) C++ Compiler for Linux 7.1 (Build 20030507)
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
+FDO: PASS1=-prof_gen  PASS2=-prof_use

Baseline optimization flags:
  C programs:       -ipo -O3 +FDO
  C++ programs:     -ipo -O2 +FDO -ansi_alias

Portability Flags:
  176.gcc: -DSPEC_CPU2000_LP64 -Dalloca=_builtin_alloca -D_LIBC
  186.crafty: -DLINUX_i386
  252.eon: -DSPEC_CPU2000_LP64 -DHAS_ERRLIST
  253.perlbmk: -DSPEC_CPU2000_LP64 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_LINUX_IA64 -DSPEC_CPU2000_GLIBC22
  254.gap: -DSPEC_CPU2000_LP64 -DSYS_HAS_CALLOC_PROTO -DSYS_IS_USG
           -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
  255.vortex: -DSPEC_CPU2000_LP64

Processes were bound to CPUs using dplace.

Peak flags same as baseline (basepeak=true set globally).
```